

PRODUCT CHANGE NOTICE

PCN Form (D4-E000-73)

PCN#22-039

NOTIFICATION DATE: June 16, 2022

MODEL(S) AFFECTED:

RC-1SPDT-A26
 RC-2SPDT-A26
 RC-4SPDT-A26

EXTENT OF CHANGE:


Upgrade of mechanical switch design

EFFECT OF CHANGE:

- Electrical Specification Changes for both models:

Attribute	Before	After
RF Power (Cold Switching)	Max: 20W	Max: 30W
Switching Time	Typ.: 25ms	Typ.: 15ms
Switch Life	Typ.: 10 million cycles	Typ.: 2 million cycles

- Minor Changes to Switch Positions:

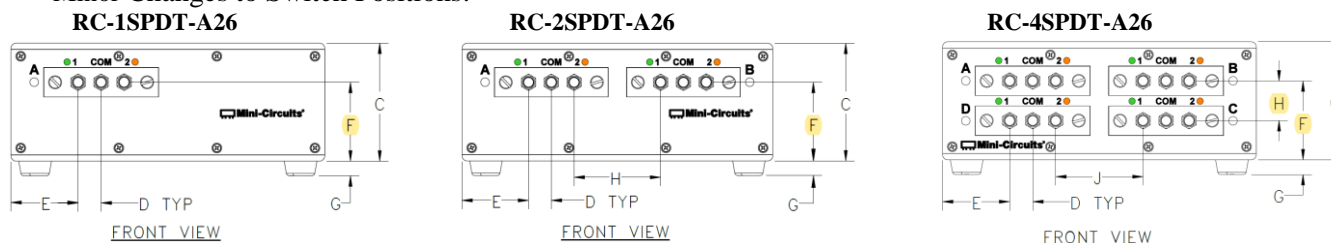

Model	Attribute	Before	After
RC-1SPDT-A26	Dimension F	1.47" (37.3)	1.50" (38.2)
RC-2SPDT-A26	Dimension F	1.47" (37.3)	1.50" (38.2)
RC-4SPDT-A26	Dimension F	1.47" (37.3)	1.50" (38.2)
RC-4SPDT-A26	Dimension H	.688" (17.48)	.757" (19.23)

REASON FOR CHANGE:

Improved Switching characteristics, power handling, and allowed more spacing between switches for easier RF cable connections by users.

EFFECTIVE DATE OF CHANGE:

Immediate

ATTACHMENTS:

n/a

QUESTIONS?

PLEASE CONTACT US.

AS9100 ISO9001 ISO14001 Certified to QMS and EMS