



Typical Performance Curves


Conversion Loss @ IF=30MHz

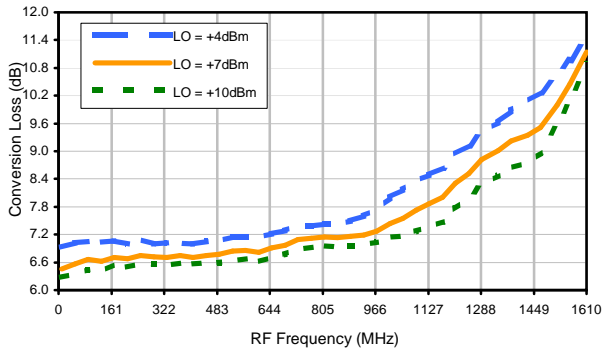


Conversion Loss vs. IF @ RF=500.1MHz

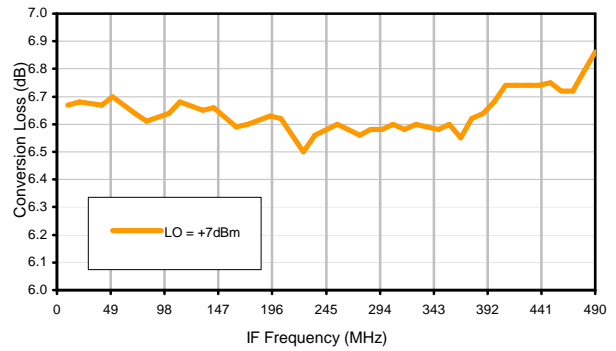


Conversion Loss vs. IF @ RF=10MHz

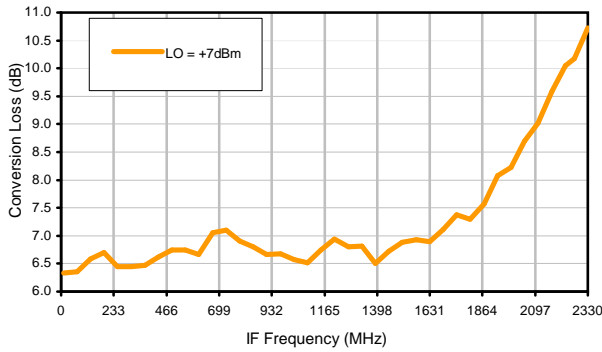


Conversion Loss vs. IF @ RF=1000.1MHz

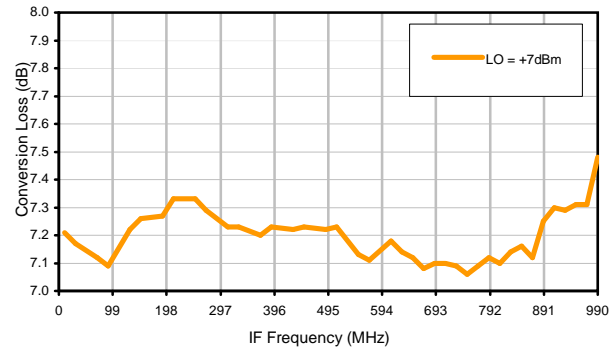

IP3 Input

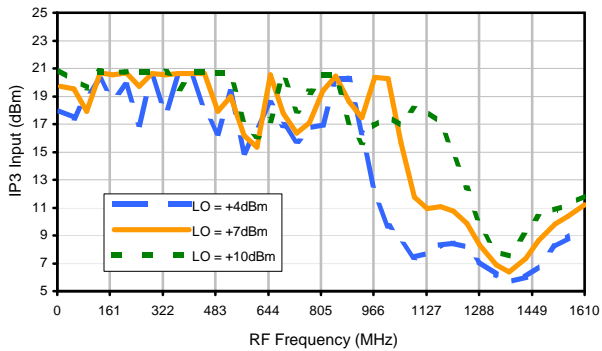


Compression @ RF IN=+1dBm

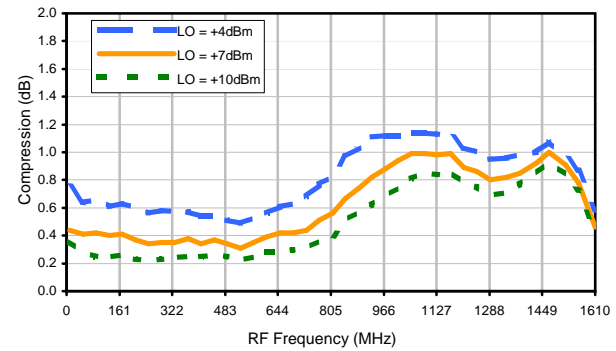


Typical Performance Curves


LO-RF Isolation

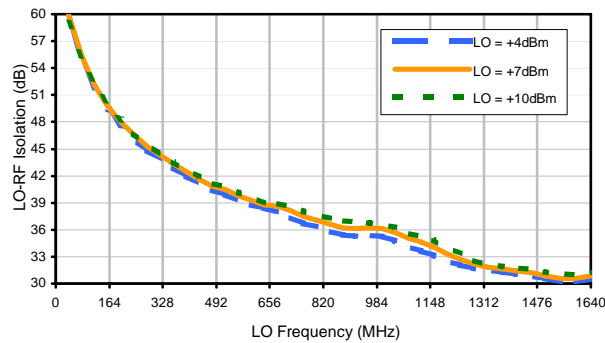


LO-IF Isolation

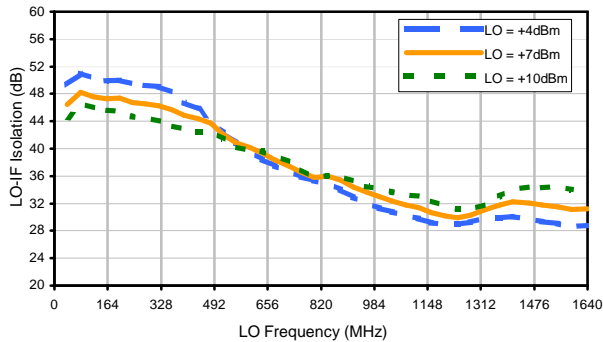


RF-IF Isolation

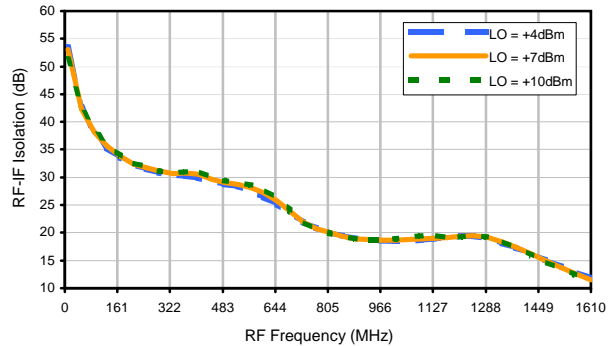


RF VSWR

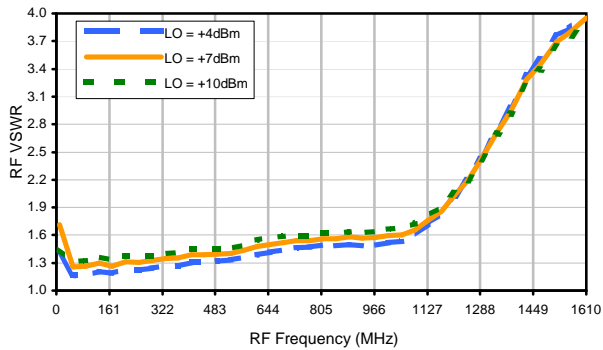

LO VSWR

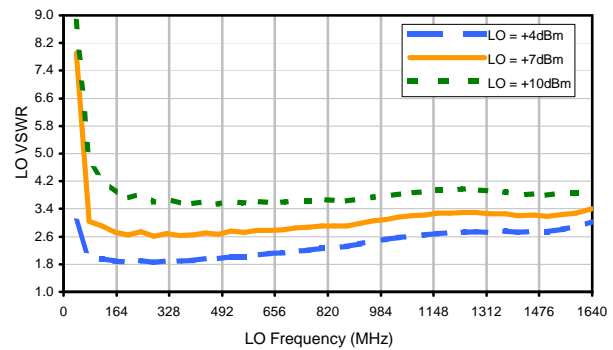

IF VSWR

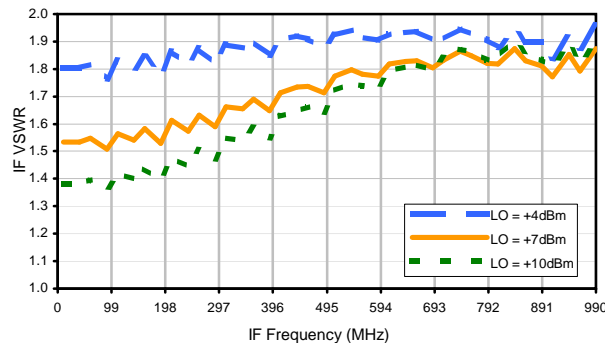

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	27	15	28	24	28	44	34	33	53
1	-	23	+0	37	12	36	19	32	38	38	41	39
2	>90	>69	56	66	55	>69	54	66	60	>69	>69	63
3	>90	>69	65	>69	65	>69	60	>69	69	>69	>69	>69
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -14.00 dBm.
 LO IN: 530 MHz; +7.00 dBm
 IF OUT: 30 MHz; -20.74 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	24	37	26	38	37	40	54	49	47	68
1	-	24	+0	36	12	36	19	35	38	43	46	45
2	73	63	48	63	47	>79	47	63	54	58	67	58
3	>90	65	47	60	73	71	44	58	49	51	59	53
4	>90	70	>79	71	70	74	68	75	61	68	69	>79
5	>90	72	65	73	61	73	57	71	56	69	58	>79
6	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	75	>79	76	>79	77	>79	78	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -4.00 dBm.
 LO IN: 530 MHz; +7.00 dBm
 IF OUT: 30 MHz; -10.77 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.