



COAXIAL

Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

KEY FEATURES

- Ultra Wide Matched Input Freq. Range: 0.1 to 67 GHz
- 35 dB Linear Dynamic Range (< ±1 dB Error)
- Positive Output Voltage Slope, 0 to +1.2 V
- Low Supply Current: 34 mA at +3.3 V typical




Generic photo used for illustration purposes only

APPLICATIONS

- Test and Measurement
- RMS Power Detection of Complex Waveforms
- 4G, 5G and 6G Transmit Power Control
- Radar Systems

FUNCTIONAL DIAGRAM

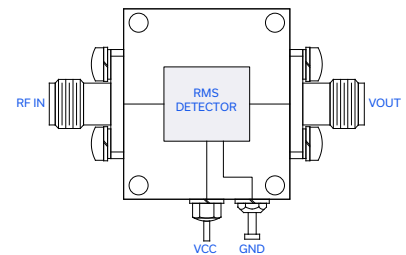

PRODUCT OVERVIEW

Mini-Circuits' ZV47-E673RMS+ is a high-accuracy RMS power detector with an ultra-wide RF input bandwidth of 0.1 GHz to 67 GHz. The DC output voltage of the detector provides an accurate representation of the average signal power applied to the RF input. This device provides a linear-in-dB response with 29 mV/dB logarithmic slope over its 35 dB dynamic range with typically better than ±1 dB accuracy. It is housed in a compact, gold over nickel plated brass alloy case (0.84" x 0.96" x 0.37") with a 1.85 mm female connector on the RF input and a 2.92 mm female connector providing the detected output voltage.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter		Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range			0.1		67	GHz
Dynamic Range at ±1 dB Error		0.1 - 67	-35 to 0			dBm
Output Voltage Range		0.1 - 67	0 to +1.2			V
Slope		0.1 - 67		+29		mV/dB
Return Loss		0.1 - 67		12		dB
Pulse Response Time	Rise	0.1 - 67		2.9		µsec
	Fall	0.1 - 67		8.1		
DC Operating Conditions	Vcc	0.1 - 67	+2.7	+3.3	+3.6	V
	Current	0.1 - 67		34		mA

ABSOLUTE MAXIMUM RATINGS¹

Parameter	Ratings
Operating Case Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C
DC Supply Voltage	+3.8 V
DC Supply Current	38 mA
RF Input Power	+12 dBm

1. Permanent damage may occur if any of these limits are exceeded.





COAXIAL


Power Detector

ZV47-E673RMS+


50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

OUTPUT POWER @+25°C

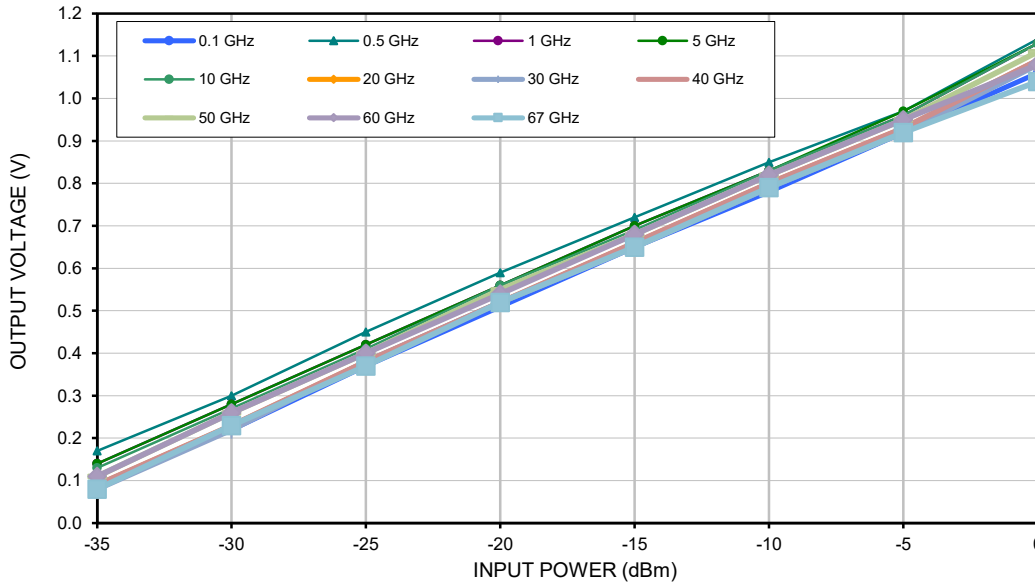

RETURN LOSS

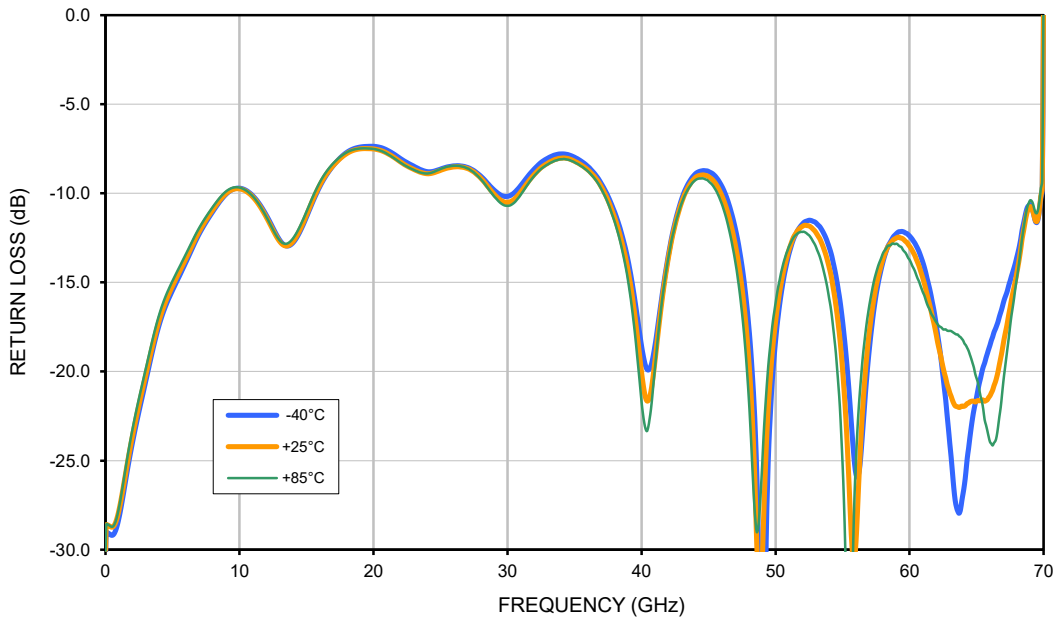



COAXIAL

Power Detector





ZV47-E673RMS+

Mini-Circuits

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show measured output voltage as a function of input power at a fixed frequency (green), plotted alongside an ideal linear voltage curve (orange) for comparison. Also shown is the difference of measured and ideal voltage represented as an error in input power (blue).

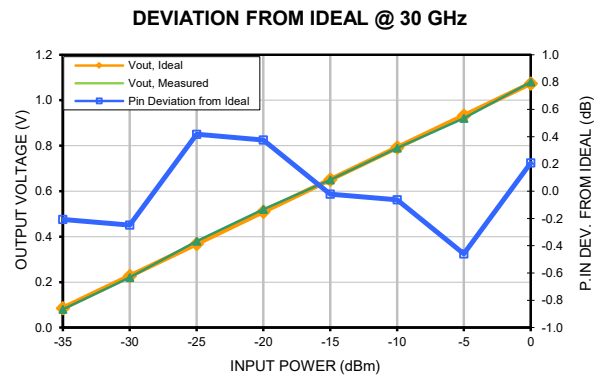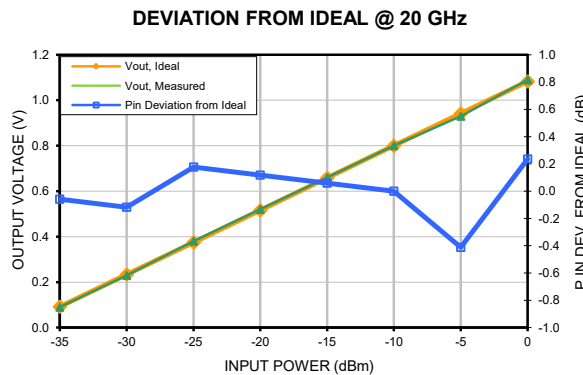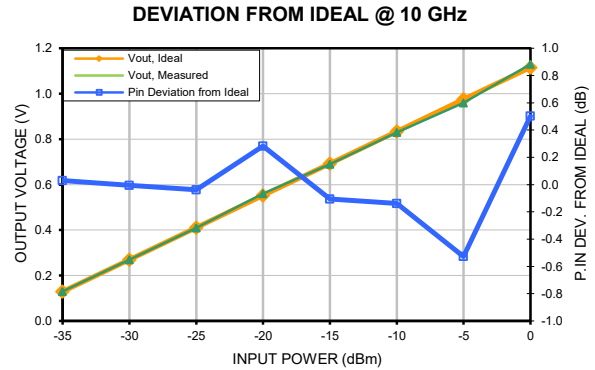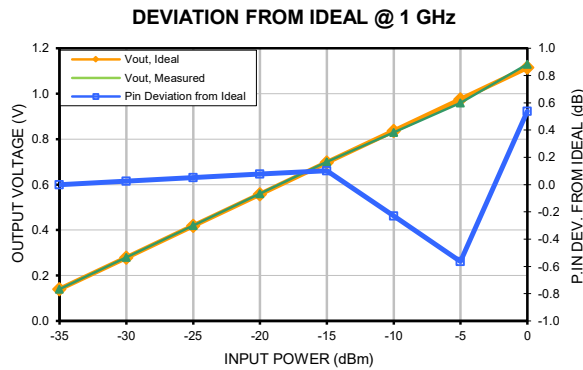



COAXIAL


Power Detector

ZV47-E673RMS+


50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS


DEVIATION FROM IDEAL @ 40 GHz

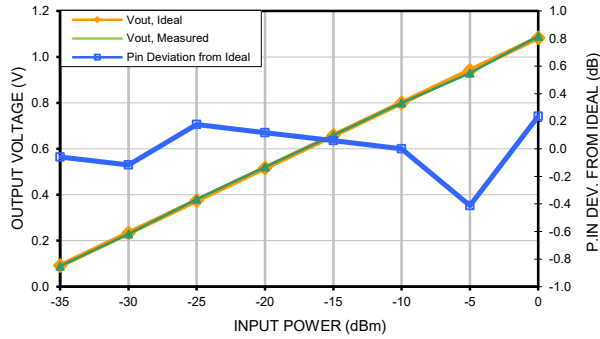


DEVIATION FROM IDEAL @ 50 GHz

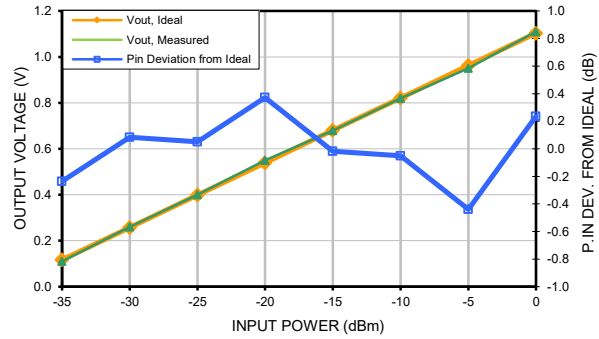

DEVIATION FROM IDEAL @ 60 GHz

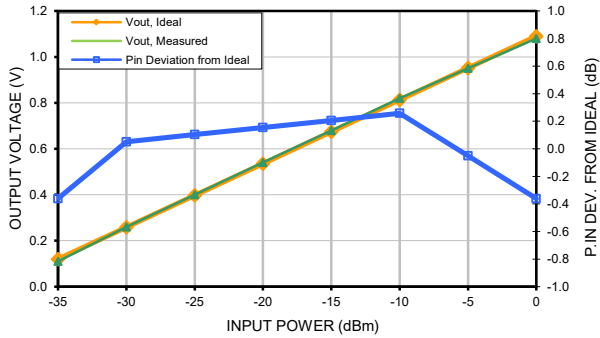

DEVIATION FROM IDEAL @ 67 GHz

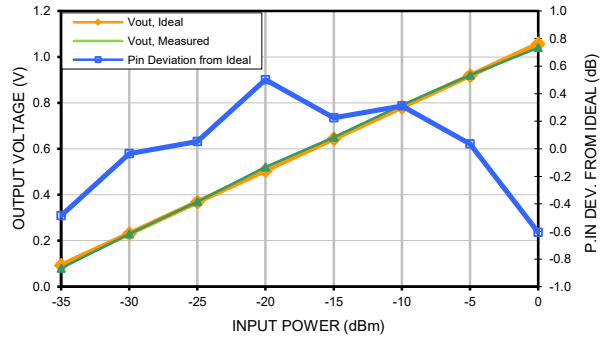



COAXIAL

Power Detector


ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female


TYPICAL PERFORMANCE GRAPHS

The following charts show measured output voltage at various temperatures as a function of frequency at a fixed input power.


OUTPUT VOLTAGE @ -35 dBm

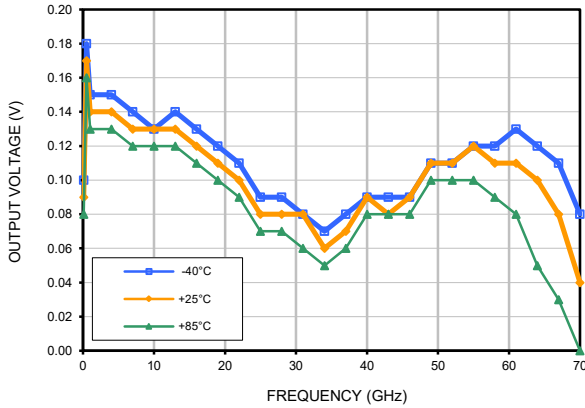

OUTPUT VOLTAGE @ -20 dBm

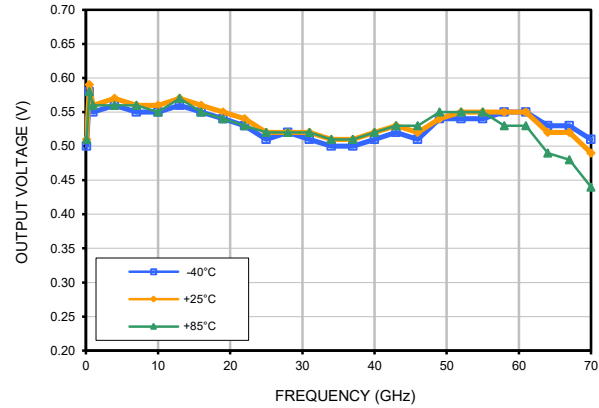

OUTPUT VOLTAGE @ 0 dBm

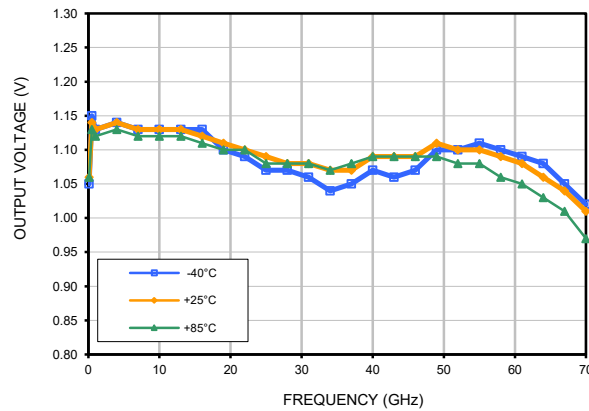



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show output voltage slope at various temperatures as a function of input power at a fixed frequency. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

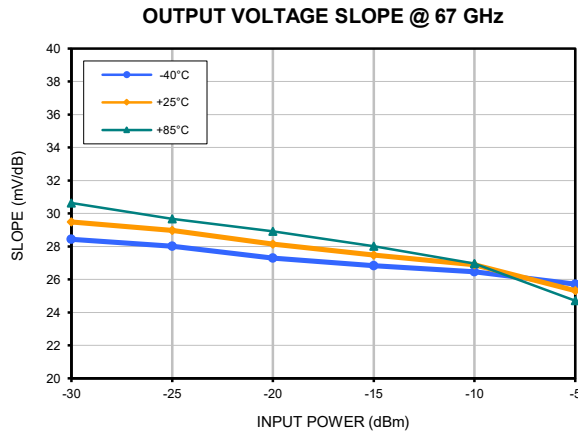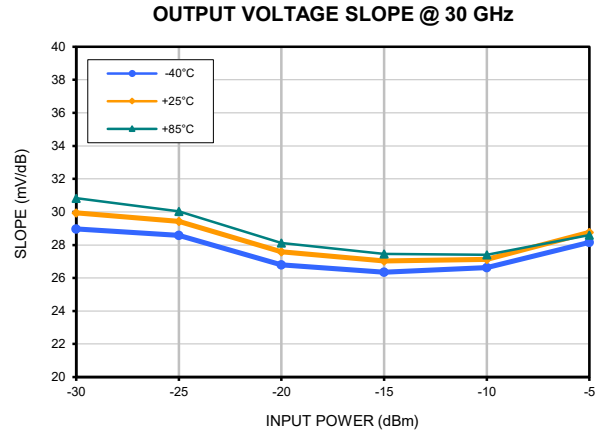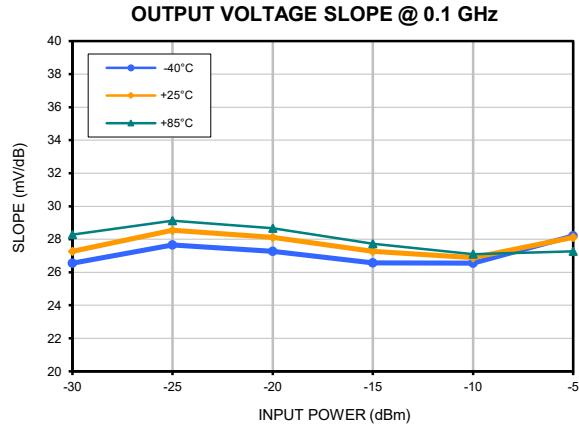



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show output voltage slope at various temperatures as a function of frequency at a fixed input power. The output voltage slope at a given input power is obtained by using linear regression over the range from -35 dBm to 0 dBm.

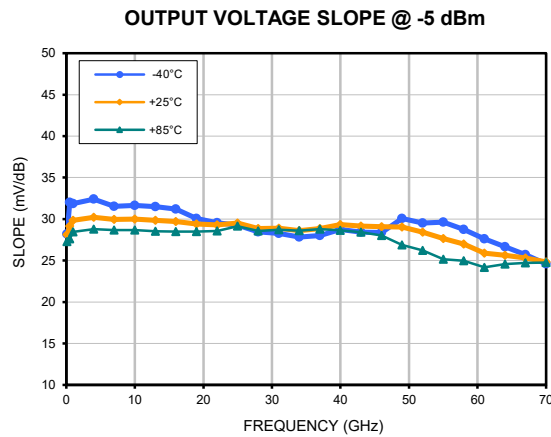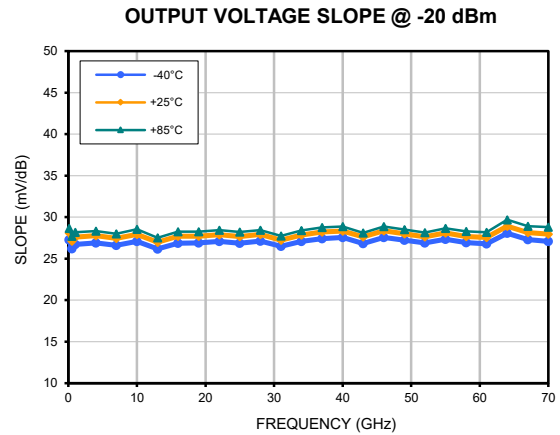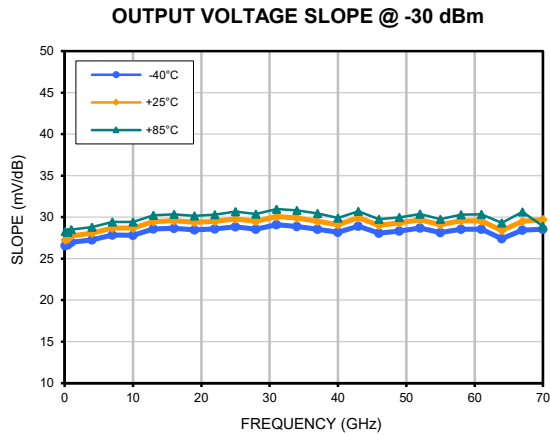



COAXIAL




Power Detector

ZV47-E673RMS+

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

TYPICAL PERFORMANCE GRAPHS

The following charts show measured output voltage deviation at -40°C relative to +25°C (blue) and measured output voltage deviation at +85°C relative to +25°C (orange). Also shown is the measured output voltage measured at +25°C normalized (green) for comparison.

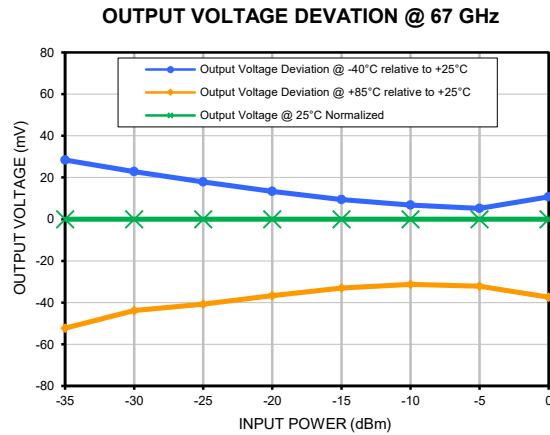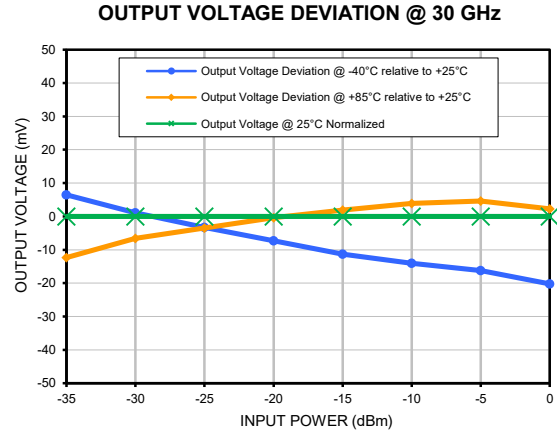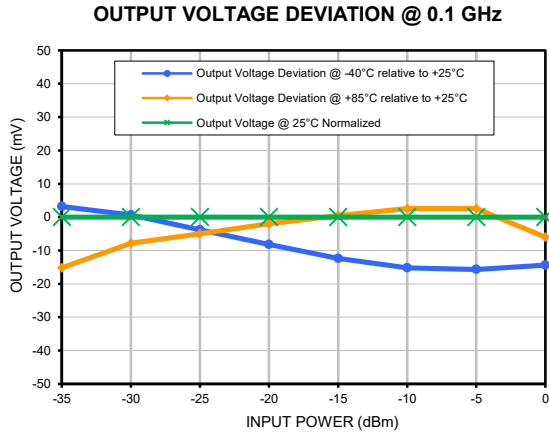



COAXIAL

Power Detector

ZV47-E673RMS+

 Mini-Circuits

50Ω -35 dBm to +0 dBm 0.1 to 67 GHz 1.85 mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	AV2578-4
RoHs Status	Compliant
Environmental Ratings	ENV28T5