

50Ω Output 5400 to 8100 MHz



+RoHS Compliant

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	17 dBm
Permanent damage may occur if any of these limits are exceeded.	

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

TOP VIEW

SIDE VIEW

PCB Land Pattern

BOTTOM VIEW

Suggested Layout,
Tolerance to be within ± 0.02

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

 DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

- broadband
- high rejection F2, -40 dBc typ.; F4, -37 dBc typ.
- low cost
- aqueous washable

- synthesizers
- local oscillators
- satellite up and down converters

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F3						F4					
	F1 Input	Output	Min.	Max.	Typ.	Max.	Typ. Min.	F2 Typ. Min.	Typ. Min.	Typ. Min.	F4 Typ. Min.	
3	1800-2700	5400-8100	0	6	16	21	6	-6	40	22	37	24

* Harmonics of input frequency below the power level of F3

INPUT RF= 0 dBm					INPUT RF= 6 dBm			
Input Frequency (MHz)	Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)		
		F1	F2	F4		F1	F2	F4
1800.00	19.20	4.47	41.49	31.45	18.88	9.15	44.86	36.77
1850.00	18.85	4.48	41.84	30.87	18.04	9.52	45.65	37.45
1900.00	18.34	4.62	42.52	30.79	17.25	9.92	45.56	37.91
1950.00	17.68	4.87	42.58	31.34	16.53	10.13	44.19	38.13
2000.00	17.27	4.97	42.35	31.83	16.15	10.12	43.14	37.93
2050.00	16.66	5.10	41.50	33.16	15.90	9.90	42.10	37.65
2100.00	16.45	4.90	40.15	34.10	15.78	9.58	40.97	36.70
2150.00	16.54	4.52	38.86	34.71	16.11	8.96	39.75	35.59
2200.00	16.80	3.91	38.37	35.05	16.55	8.19	38.88	34.56
2225.00	16.95	3.53	38.00	35.44	16.62	7.85	38.52	34.41
2250.00	16.67	3.61	37.71	36.23	16.59	7.69	37.98	34.86
2300.00	16.47	3.50	37.32	37.24	16.71	7.20	37.03	36.50
2350.00	16.51	3.20	36.96	37.90	17.09	6.64	35.72	41.27
2400.00	16.85	2.55	36.30	38.28	17.47	5.88	34.55	50.85
2450.00	17.27	1.92	35.49	38.87	17.87	5.23	33.71	52.34
2500.00	17.41	1.48	34.82	38.99	18.08	4.71	33.41	43.83
2550.00	17.63	1.04	33.97	39.53	18.32	4.20	33.29	40.68
2600.00	17.97	0.38	33.17	39.71	18.55	3.68	33.34	39.35
2650.00	18.07	0.10	32.34	40.50	18.75	3.29	33.51	39.50
2700.00	18.29	0.37	31.44	41.26	18.67	3.09	34.59	39.79

Output Frequency (MHz)	Conversion Loss (dB) - INPUT RF=0 dBm	Conversion Loss (dB) - INPUT RF=6 dBm
5400	19.5	18.5
5700	18.5	17.0
6000	17.5	16.0
6300	16.5	15.5
6600	17.0	16.0
6900	16.5	16.5
7200	17.0	17.5
7500	17.5	18.0
7800	18.0	18.5
8100	18.5	19.0

Figure 10 is a line graph showing Harmonic Output (-dBc) on the Y-axis (ranging from 0 to 16) versus F1 Frequency (MHz) on the X-axis (ranging from 1800 to 2700). The graph compares two input RF levels: INPUT RF=0 dBm (solid blue line) and INPUT RF=6 dBm (dashed red line). Both curves show a peak around 2000 MHz. The 6 dBm curve is consistently higher than the 0 dBm curve, with a peak difference of approximately 4 dBc. The 0 dBm curve drops to near 0 dBc at 2700 MHz, while the 6 dBm curve remains above 3 dBc.

F1 Frequency (MHz)	INPUT RF=0 dBm (-dBc)	INPUT RF=6 dBm (-dBc)
1800	4.5	9.5
1900	4.8	10.2
2000	5.0	10.5
2100	4.5	9.5
2200	3.8	8.5
2300	3.5	7.5
2400	2.5	6.5
2500	1.5	5.5
2600	0.5	4.5
2700	0.2	3.5

F2 Frequency (MHz)	INPUT RF=0 dBm (-dBc)	INPUT RF=6 dBm (-dBc)
3600	42	45
3800	43	46
4000	42	44
4200	40	42
4400	38	40
4600	37	38
4800	35	36
5000	34	35
5200	33	34
5400	32	35

F4 Frequency (MHz)	INPUT RF=0 dBm (dBc)	INPUT RF=6 dBm (dBc)
7000	32	38
7500	30	38
8000	32	37
8500	34	35
9000	36	34
9500	38	48
9750	39	52
10000	39	45
10500	39	38
11000	40	38



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
RMK-3-812+
ED-12644/2
DJ/CP/AM
200813
Page 1 of 1

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 0 dBm @ +25°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	18.73	3.01	52.77	34.47
1823	3645	5468	7290	18.26	3.12	53.55	34.77
1845	3690	5535	7380	18.08	3.13	55.11	35.02
1868	3735	5603	7470	18.04	3.11	53.94	35.76
1890	3780	5670	7560	17.76	3.18	55.19	36.59
1913	3825	5738	7650	17.65	3.27	59.46	37.35
1935	3870	5805	7740	17.77	2.91	56.85	38.18
1958	3915	5873	7830	17.73	2.88	55.67	38.69
1980	3960	5940	7920	17.07	3.44	56.26	41.08
2003	4005	6008	8010	16.77	3.49	57.25	42.37
2025	4050	6075	8100	16.66	3.43	58.47	40.02
2048	4095	6143	8190	16.62	3.35	60.04	42.80
2070	4140	6210	8280	16.25	3.56	56.27	46.85
2093	4185	6278	8370	16.05	3.64	55.03	47.13
2115	4230	6345	8460	16.44	3.22	54.83	46.55
2138	4275	6413	8550	16.49	3.09	56.14	47.83
2160	4320	6480	8640	16.09	3.29	59.51	52.22
2183	4365	6548	8730	15.95	3.25	56.94	59.60
2205	4410	6615	8820	15.93	3.30	52.76	61.42
2228	4455	6683	8910	15.88	3.16	53.63	66.91
2250	4500	6750	9000	15.61	3.32	55.79	60.01
2273	4545	6818	9090	15.63	3.17	55.93	59.07
2295	4590	6885	9180	16.24	2.56	55.97	54.07
2318	4635	6953	9270	16.52	2.25	52.15	54.15
2340	4680	7020	9360	16.38	2.17	52.16	54.43
2363	4725	7088	9450	16.06	2.35	53.34	50.01
2385	4770	7155	9540	16.10	2.19	54.15	49.22
2408	4815	7223	9630	15.99	2.19	50.98	50.93
2430	4860	7290	9720	16.00	2.13	48.37	51.12
2453	4905	7358	9810	16.11	2.08	48.37	48.24
2475	4950	7425	9900	16.80	1.35	49.59	47.26
2498	4995	7493	9990	17.38	0.81	48.50	47.46
2520	5040	7560	10080	17.30	0.84	45.15	47.74
2543	5085	7628	10170	16.72	1.18	46.55	46.11
2565	5130	7695	10260	16.93	0.91	46.89	44.73
2588	5175	7763	10350	17.28	0.41	46.42	44.52
2610	5220	7830	10440	17.16	0.34	44.43	45.78
2633	5265	7898	10530	17.03	0.36	45.67	44.35
2655	5310	7965	10620	17.10	0.18	47.08	44.03
2678	5355	8033	10710	17.45	-0.19	45.53	45.37
2700	5400	8100	10800	17.83	-0.54	44.26	45.20

* Harmonic Output below power level of X3 Output.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. X2
RMK-3-812+
7/28/2009
Page 1 of 6

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 0 dBm @ -40°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	19.73	0.40	43.26	26.64
1823	3645	5468	7290	19.27	0.52	43.96	26.73
1845	3690	5535	7380	18.66	0.93	47.98	27.87
1868	3735	5603	7470	18.57	0.94	48.85	29.70
1890	3780	5670	7560	18.19	1.05	48.90	30.12
1913	3825	5738	7650	18.31	0.88	56.40	30.81
1935	3870	5805	7740	18.60	0.35	51.89	32.80
1958	3915	5873	7830	18.70	0.16	50.10	33.28
1980	3960	5940	7920	17.72	1.05	58.04	34.73
2003	4005	6008	8010	17.51	1.03	55.83	36.53
2025	4050	6075	8100	17.17	1.22	58.36	36.33
2048	4095	6143	8190	16.83	1.46	60.24	38.63
2070	4140	6210	8280	16.40	1.77	55.82	40.79
2093	4185	6278	8370	16.09	2.00	56.94	40.35
2115	4230	6345	8460	16.64	1.44	59.69	40.80
2138	4275	6413	8550	16.80	1.20	57.34	41.40
2160	4320	6480	8640	16.30	1.50	57.34	43.93
2183	4365	6548	8730	16.15	1.43	58.85	47.81
2205	4410	6615	8820	15.96	1.61	53.94	45.42
2228	4455	6683	8910	15.62	1.69	56.35	48.22
2250	4500	6750	9000	15.07	2.07	56.12	55.28
2273	4545	6818	9090	15.01	1.97	54.38	53.22
2295	4590	6885	9180	15.83	1.17	55.29	55.11
2318	4635	6953	9270	16.40	0.62	51.94	56.28
2340	4680	7020	9360	16.21	0.67	52.57	52.46
2363	4725	7088	9450	15.67	1.10	52.22	50.64
2385	4770	7155	9540	15.63	1.05	53.74	50.46
2408	4815	7223	9630	15.13	1.45	49.61	51.67
2430	4860	7290	9720	14.75	1.74	48.34	47.19
2453	4905	7358	9810	14.80	1.71	50.17	44.58
2475	4950	7425	9900	15.82	0.64	49.44	44.68
2498	4995	7493	9990	16.59	-0.13	45.06	44.88
2520	5040	7560	10080	16.45	-0.09	42.31	44.05
2543	5085	7628	10170	15.72	0.36	45.38	43.21
2565	5130	7695	10260	16.04	-0.06	43.88	42.31
2588	5175	7763	10350	16.43	-0.56	40.56	41.65
2610	5220	7830	10440	16.06	-0.36	39.88	41.78
2633	5265	7898	10530	15.88	-0.25	40.18	40.41
2655	5310	7965	10620	16.00	-0.43	42.93	39.43
2678	5355	8033	10710	16.55	-1.01	37.82	40.33
2700	5400	8100	10800	17.10	-1.41	36.82	39.25

* Harmonic Output below power level of X3 Output.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. X2
RMK-3-812+
7/28/2009
Page 2 of 6

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 0 dBm @ +85°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	19.30	4.23	54.78	36.96
1823	3645	5468	7290	18.86	4.32	55.17	37.96
1845	3690	5535	7380	18.85	4.21	56.17	37.78
1868	3735	5603	7470	18.81	4.20	52.40	38.55
1890	3780	5670	7560	18.66	4.15	53.63	39.43
1913	3825	5738	7650	18.47	4.32	56.94	40.47
1935	3870	5805	7740	18.51	4.04	56.58	41.66
1958	3915	5873	7830	18.44	4.00	54.75	40.62
1980	3960	5940	7920	17.94	4.39	54.21	45.28
2003	4005	6008	8010	17.71	4.36	55.63	46.59
2025	4050	6075	8100	17.64	4.26	54.62	43.79
2048	4095	6143	8190	17.72	4.06	57.59	46.80
2070	4140	6210	8280	17.49	4.15	56.51	50.52
2093	4185	6278	8370	17.44	4.12	56.04	54.29
2115	4230	6345	8460	17.75	3.79	54.51	53.36
2138	4275	6413	8550	17.79	3.66	56.52	51.79
2160	4320	6480	8640	17.55	3.71	59.39	56.39
2183	4365	6548	8730	17.48	3.59	61.70	62.45
2205	4410	6615	8820	17.56	3.54	54.48	60.81
2228	4455	6683	8910	17.64	3.29	53.55	61.17
2250	4500	6750	9000	17.56	3.31	55.90	58.32
2273	4545	6818	9090	17.69	3.06	57.33	60.03
2295	4590	6885	9180	18.23	2.51	52.74	62.43
2318	4635	6953	9270	18.39	2.30	55.30	60.17
2340	4680	7020	9360	18.28	2.12	52.00	57.09
2363	4725	7088	9450	18.10	2.14	48.57	54.49
2385	4770	7155	9540	18.11	2.02	49.93	55.24
2408	4815	7223	9630	18.09	1.93	51.24	55.11
2430	4860	7290	9720	18.23	1.79	47.61	51.72
2453	4905	7358	9810	18.32	1.76	45.49	49.50
2475	4950	7425	9900	18.81	1.24	49.38	50.39
2498	4995	7493	9990	19.16	0.91	48.19	51.49
2520	5040	7560	10080	19.04	0.95	45.37	50.90
2543	5085	7628	10170	18.55	1.20	47.73	48.49
2565	5130	7695	10260	18.74	0.93	47.58	47.91
2588	5175	7763	10350	19.00	0.54	48.68	48.90
2610	5220	7830	10440	18.96	0.37	47.06	50.62
2633	5265	7898	10530	18.98	0.25	46.04	48.48
2655	5310	7965	10620	19.05	0.09	50.86	47.76
2678	5355	8033	10710	19.41	-0.51	42.50	49.20
2700	5400	8100	10800	19.70	-0.50	46.49	50.19



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. X2
 RMK-3-812+
 7/28/2009
 Page 3 of 6

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 6 dBm @ +25°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	17.42	8.63	55.51	34.18
1823	3645	5468	7290	16.85	8.83	54.77	34.54
1845	3690	5535	7380	17.22	8.42	58.29	34.85
1868	3735	5603	7470	16.96	8.61	52.93	35.80
1890	3780	5670	7560	16.78	8.52	54.71	35.68
1913	3825	5738	7650	16.51	8.74	58.89	36.82
1935	3870	5805	7740	16.55	8.45	54.54	38.29
1958	3915	5873	7830	16.33	8.52	54.58	36.31
1980	3960	5940	7920	15.85	8.83	53.50	40.34
2003	4005	6008	8010	15.73	8.66	52.62	43.70
2025	4050	6075	8100	15.78	8.48	51.71	40.12
2048	4095	6143	8190	15.88	8.34	52.06	44.10
2070	4140	6210	8280	15.62	8.43	53.20	50.54
2093	4185	6278	8370	15.79	8.16	52.60	53.62
2115	4230	6345	8460	16.09	7.81	49.33	59.60
2138	4275	6413	8550	15.92	7.86	51.87	54.50
2160	4320	6480	8640	15.80	7.76	55.20	57.45
2183	4365	6548	8730	15.97	7.37	55.76	53.81
2205	4410	6615	8820	16.16	7.21	52.32	54.59
2228	4455	6683	8910	16.18	7.03	52.62	50.26
2250	4500	6750	9000	16.16	7.02	51.85	49.47
2273	4545	6818	9090	16.50	6.60	51.32	53.83
2295	4590	6885	9180	16.93	6.14	51.64	52.45
2318	4635	6953	9270	16.76	6.19	50.29	50.51
2340	4680	7020	9360	16.70	5.96	48.88	50.26
2363	4725	7088	9450	16.73	5.77	47.58	47.82
2385	4770	7155	9540	16.89	5.55	47.38	47.87
2408	4815	7223	9630	16.74	5.56	47.30	48.51
2430	4860	7290	9720	16.82	5.40	45.53	46.50
2453	4905	7358	9810	17.10	5.19	45.12	45.77
2475	4950	7425	9900	17.56	4.72	46.10	47.96
2498	4995	7493	9990	17.54	4.71	46.20	47.89
2520	5040	7560	10080	17.19	4.89	43.98	46.14
2543	5085	7628	10170	16.83	4.93	44.93	45.42
2565	5130	7695	10260	17.17	4.62	44.38	45.80
2588	5175	7763	10350	17.18	4.47	44.88	47.73
2610	5220	7830	10440	16.97	4.47	43.80	47.75
2633	5265	7898	10530	17.31	4.04	44.34	45.93
2655	5310	7965	10620	17.62	3.62	43.67	46.02
2678	5355	8033	10710	17.76	3.55	41.54	48.63
2700	5400	8100	10800	17.75	3.57	42.99	47.89

* Harmonic Output below power level of X3 Output.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. X2
RMK-3-812+
7/28/2009
Page 4 of 6

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 6 dBm @ -40°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	16.25	8.54	54.27	35.30
1823	3645	5468	7290	15.77	8.72	54.46	34.91
1845	3690	5535	7380	16.02	8.35	61.87	35.28
1868	3735	5603	7470	15.78	8.51	58.38	35.35
1890	3780	5670	7560	15.58	8.40	58.39	34.95
1913	3825	5738	7650	15.36	8.54	73.74	36.08
1935	3870	5805	7740	15.35	8.30	64.42	37.22
1958	3915	5873	7830	15.13	8.36	63.55	35.88
1980	3960	5940	7920	14.53	8.82	65.42	39.07
2003	4005	6008	8010	14.36	8.72	59.34	40.36
2025	4050	6075	8100	14.39	8.60	60.31	36.95
2048	4095	6143	8190	14.37	8.59	59.80	40.11
2070	4140	6210	8280	13.99	8.79	56.10	43.57
2093	4185	6278	8370	14.10	8.59	55.41	44.53
2115	4230	6345	8460	14.35	8.29	52.55	44.46
2138	4275	6413	8550	14.10	8.42	52.55	45.41
2160	4320	6480	8640	13.85	8.42	55.67	48.42
2183	4365	6548	8730	13.92	8.09	55.01	54.03
2205	4410	6615	8820	14.05	7.94	50.29	52.76
2228	4455	6683	8910	13.99	7.78	54.10	51.91
2250	4500	6750	9000	13.87	7.85	59.72	54.66
2273	4545	6818	9090	14.23	7.40	55.01	55.13
2295	4590	6885	9180	14.66	6.92	57.57	49.52
2318	4635	6953	9270	14.49	7.00	55.21	51.11
2340	4680	7020	9360	14.42	6.85	53.21	58.16
2363	4725	7088	9450	14.53	6.63	50.60	57.99
2385	4770	7155	9540	14.78	6.42	53.04	56.19
2408	4815	7223	9630	14.61	6.45	51.55	63.16
2430	4860	7290	9720	14.67	6.29	47.19	59.35
2453	4905	7358	9810	14.99	6.00	47.47	51.08
2475	4950	7425	9900	15.59	5.40	48.89	52.07
2498	4995	7493	9990	15.65	5.27	48.59	52.97
2520	5040	7560	10080	15.35	5.31	44.49	48.68
2543	5085	7628	10170	14.92	5.45	46.10	44.62
2565	5130	7695	10260	15.25	5.10	46.33	44.61
2588	5175	7763	10350	15.26	5.02	47.64	45.69
2610	5220	7830	10440	14.87	5.17	46.68	45.13
2633	5265	7898	10530	15.15	4.87	46.14	43.86
2655	5310	7965	10620	15.45	4.47	48.51	44.40
2678	5355	8033	10710	15.67	4.22	43.17	46.99
2700	5400	8100	10800	15.51	4.58	47.05	45.92

* Harmonic Output below power level of X3 Output.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. X2
RMK-3-812+
7/28/2009
Page 5 of 6

Frequency Multiplier (Tripler)

RMK-3-812+

Typical Performance Data

Test Conditions: RF Input Power = 6 dBm @ +85°C

FREQUENCY (MHz)				CONVERSION LOSS (dB)	HARMONIC OUTPUT* (-dBc)		
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X3 OUTPUT	X1 OUTPUT	X2 OUTPUT	X4 OUTPUT
1800	3600	5400	7200	19.21	8.19	53.94	32.72
1823	3645	5468	7290	18.58	8.38	53.21	33.31
1845	3690	5535	7380	19.00	8.03	56.26	33.65
1868	3735	5603	7470	18.72	8.18	50.13	35.29
1890	3780	5670	7560	18.67	8.04	49.85	36.29
1913	3825	5738	7650	18.46	8.21	53.06	37.68
1935	3870	5805	7740	18.49	7.92	51.81	40.46
1958	3915	5873	7830	18.40	7.83	49.49	39.07
1980	3960	5940	7920	18.06	8.01	49.97	45.06
2003	4005	6008	8010	18.03	7.74	50.66	50.93
2025	4050	6075	8100	18.11	7.52	49.34	46.01
2048	4095	6143	8190	18.28	7.33	49.63	59.67
2070	4140	6210	8280	18.11	7.34	51.61	51.04
2093	4185	6278	8370	18.35	7.05	54.08	56.06
2115	4230	6345	8460	18.65	6.72	50.18	49.77
2138	4275	6413	8550	18.55	6.69	51.58	46.38
2160	4320	6480	8640	18.45	6.58	54.02	48.07
2183	4365	6548	8730	18.58	6.19	54.87	46.06
2205	4410	6615	8820	18.79	5.95	51.45	46.98
2228	4455	6683	8910	18.80	5.80	50.48	45.19
2250	4500	6750	9000	18.73	5.88	52.08	43.82
2273	4545	6818	9090	19.07	5.47	51.00	45.90
2295	4590	6885	9180	19.47	4.99	48.64	45.01
2318	4635	6953	9270	19.27	5.09	49.25	43.98
2340	4680	7020	9360	19.11	4.86	47.86	44.98
2363	4725	7088	9450	19.16	4.55	44.71	43.56
2385	4770	7155	9540	19.27	4.40	47.16	43.92
2408	4815	7223	9630	19.10	4.42	46.23	45.31
2430	4860	7290	9720	19.19	4.33	44.04	44.62
2453	4905	7358	9810	19.48	4.14	43.52	44.76
2475	4950	7425	9900	19.90	3.72	45.30	46.79
2498	4995	7493	9990	19.84	3.75	44.07	48.05
2520	5040	7560	10080	19.53	3.86	42.24	47.42
2543	5085	7628	10170	19.25	3.82	42.68	46.66
2565	5130	7695	10260	19.64	3.38	42.11	47.26
2588	5175	7763	10350	19.65	3.32	42.97	49.48
2610	5220	7830	10440	19.50	3.18	40.97	49.95
2633	5265	7898	10530	19.87	2.81	40.53	47.81
2655	5310	7965	10620	20.17	2.33	40.15	47.57
2678	5355	8033	10710	20.41	1.82	36.61	48.68
2700	5400	8100	10800	20.42	2.42	39.78	49.96

* Harmonic Output below power level of X3 Output.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS


REV. X2
RMK-3-812+
7/28/2009
Page 6 of 6

Frequency Multiplier (Tripler)


RMK-3-812+

Typical Performance Curves


Conversion Loss X3 Output @ RF IN =0dBm

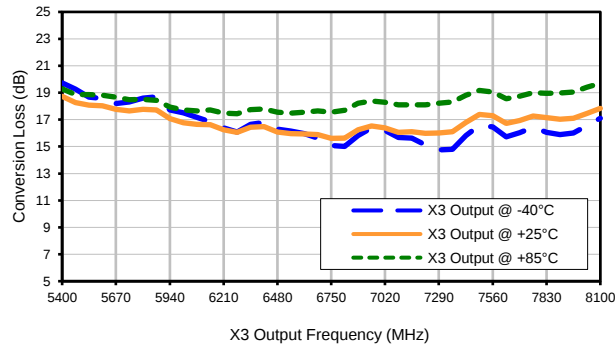


Harmonic X1 Output @ RF IN =0dBm

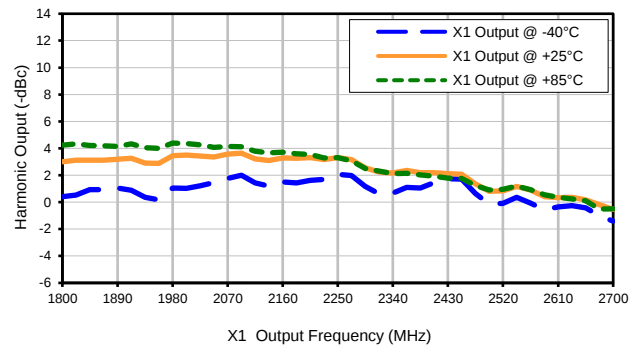

Harmonic X2 Output @ RF IN =0dBm

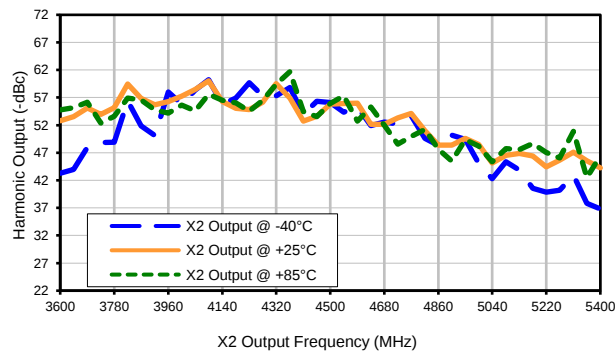

Harmonic X4 Output @ RF IN =0dBm

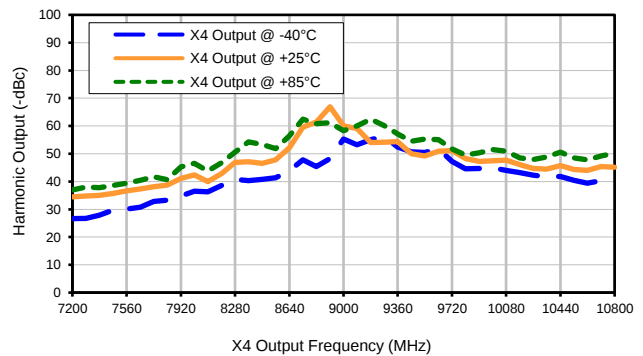

P.O. Box 350166, Brooklyn, New York 11235-0003 • Fax (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS




REV. X2
RMK-3-812+
7/28/2009
Page 1 of 2

Frequency Multiplier (Tripler)


RMK-3-812+

Typical Performance Curves


Conversion Loss X3 Output @ RF IN=6dBm

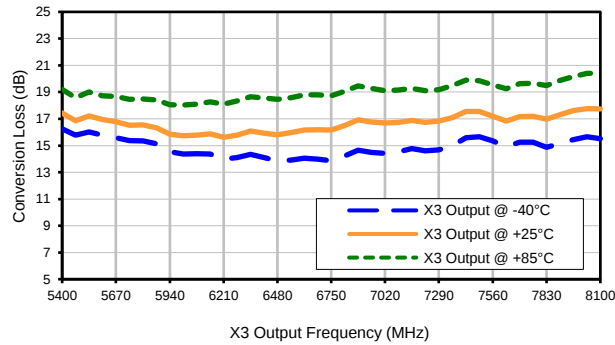


Harmonic X1 Output @ RF IN=6dBm

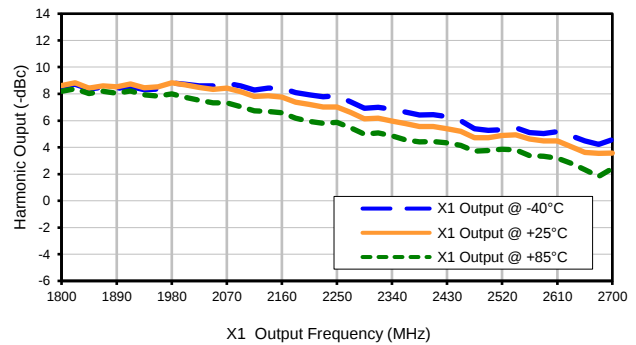


Harmonic X2 Output @ RF IN=6dBm

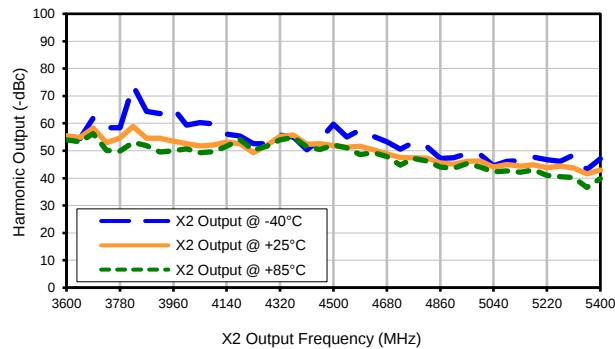


Harmonic X4 Output @ RF IN=6dBm

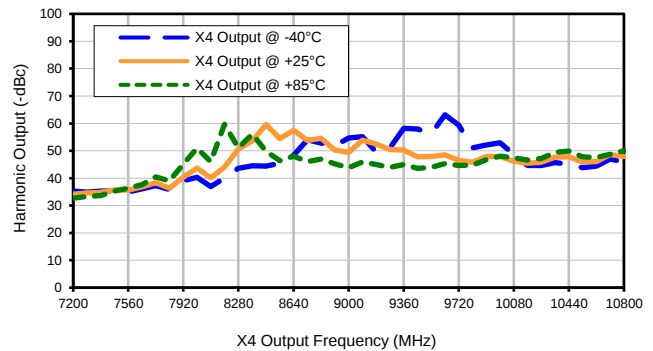

Outline Dimensions

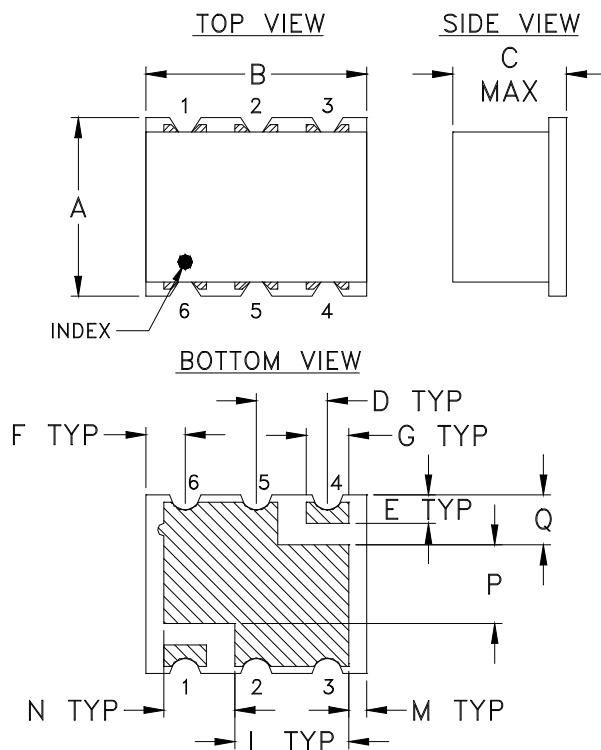

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L
TT1224	.25 (6.35)	.31 (7.87)	.16 (4.06)	.100 (2.54)	.040 (1.02)	.055 (1.40)	.060 (1.52)	.065 (1.65)	.300 (7.62)	.060 (1.52)	.160 (4.06)

CASE #	M	N	P	Q	WT. GRAM
TT1224	.025 (.64)	.100 (2.54)	.110 (2.79)	.070 (1.78)	.16

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination: 2-10 μ inch (.05-.25 microns) Gold over 100-300 μ inch (2.54-7.62 microns) Nickel plate




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

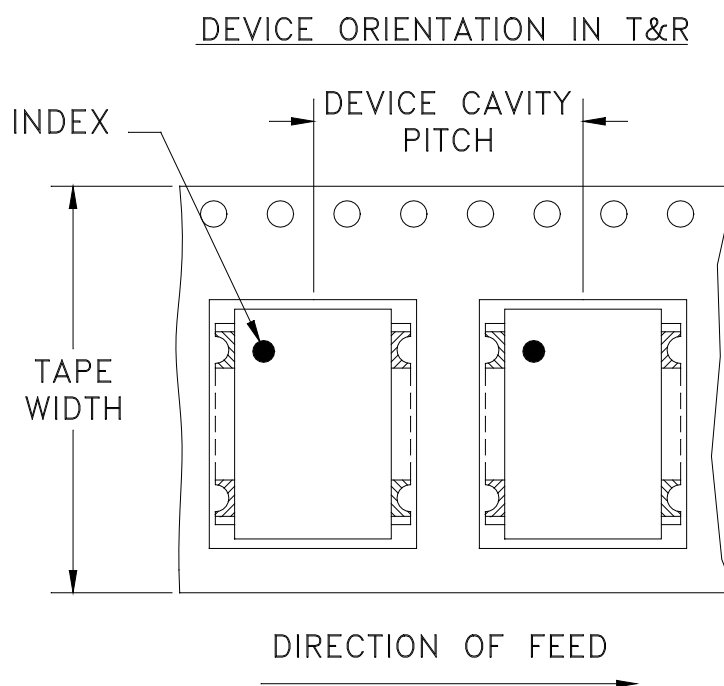

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500
			1000


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M108897	NEW RELEASE	01/04/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION FOR TT1224 CASE STYLE "rv" PIN CONNECTION

.066 TRACE WIDTH, 3 PL.
(SEE NOTE BELOW)

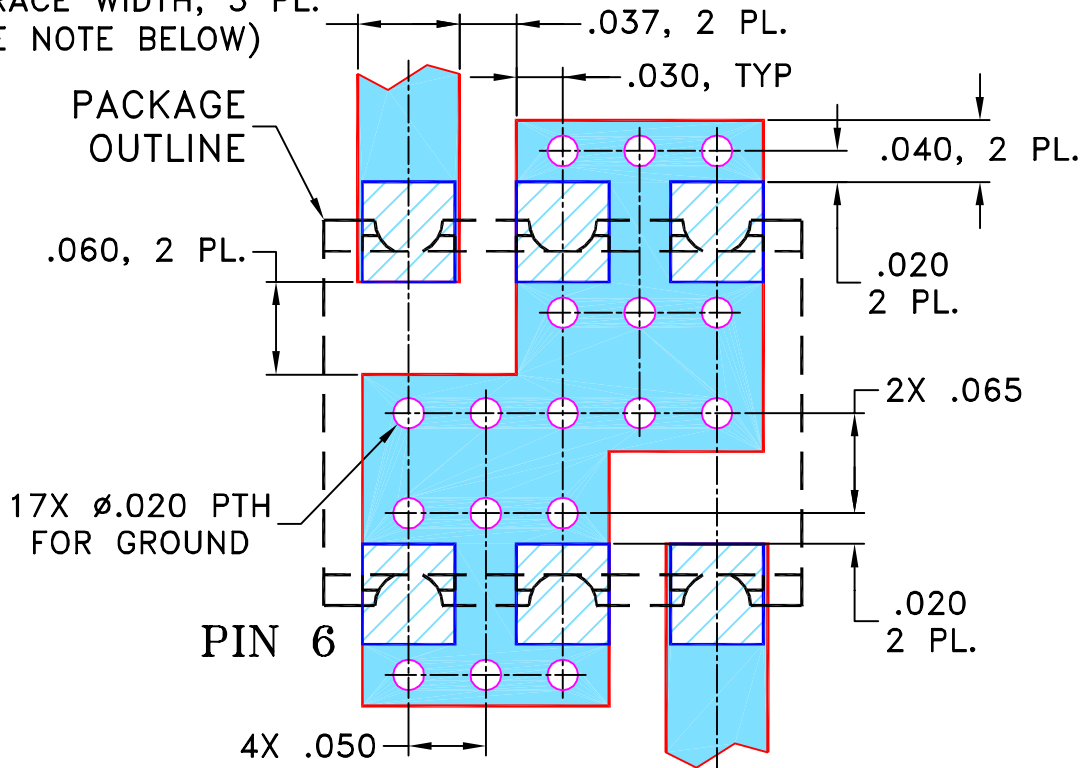

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

12/14/06

TOLERANCES ON:

CHECKED

IL


01/04/07

2 PL DECIMALS $\pm$

APPROVED

DJ

01/04/07

3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$ 

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, rv, TT1224, RMK-3-662+, TB-393

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-258


REV:
OR

FILE: 98PL258


SCALE: 8:1

SHEET: 1 OF 1

Evaluation Board and Circuit

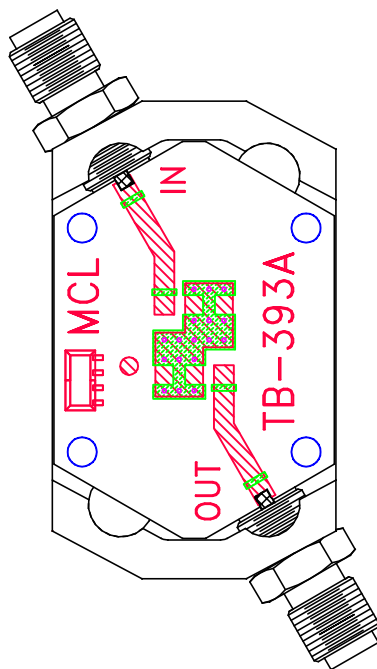

TB-393

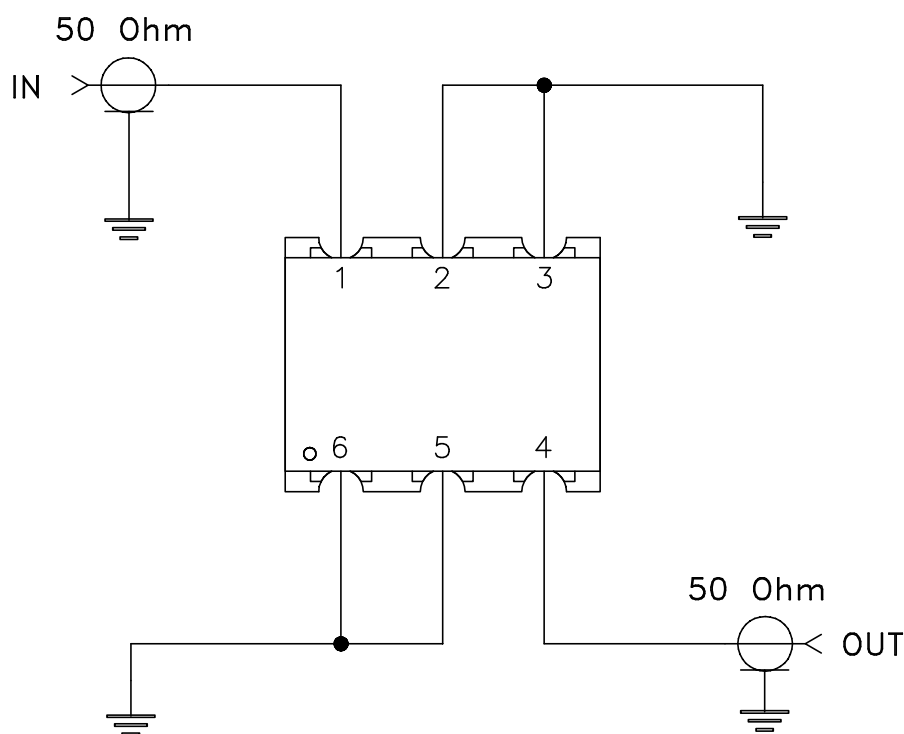

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215