


REPLACEMENT PART REFERENCE GUIDE, GP2Y1A+

AN-10-027

Original Part:	GP2Y1+	
Replacement Part:	GP2Y1A+	

Replacement Part has been judged by Mini-Circuits Engineering as a suitable replacement to Original Part.

MECHANICAL DIMENSIONS

Case Style: DQ1225

Both the GP2Y1A+ and GP2Y1+ uses the same case style DQ1225 case style.

CONCLUSION:

1) FORM-FIT-FUNCTIONAL ANALYSIS_a:

The Replacement Part GP2Y1A+ has the same form and fit as the original part GP2Y1+

The Replacement Part maximum power handling and operating temperature on the Absolute Maximum Table were changed. The Replacement Part's maximum input power as a splitter is now +40dBm at 25C instead of the Original Part's maximum input power as a splitter of 1.5W (+31.76dBm). Replacement Part's maximum internal dissipation power is now +38dBm at 25C instead of the Original Part's maximum internal dissipation power of 0.75W (+28.75dBm).

Additionally, the Replacement Part's maximum operating temperature is now +105°C instead of the Original Part's maximum operating temperature of 85°C

Replacement Part and Original Part feature the same expected performance. See section 2 for Min. Max and Typical performance and graphs.

2) RF PERFORMANCE COMPARISON AT ROOM TEMPERATURE:



MODEL: GP2Y1+, GP2Y1A+

Parameter	Freq (MHz)		GP2Y1+			GP2Y1A+		
	From	To	Min.	Avg.	Max.	Min.	Avg.	Max.
INSERTION LOSS ¹ - Above 3dB (dB)	1550	1550					1.3	1.6
	2500	2500		1.0	1.9		1.1	1.4
	3700	3700					1.2	1.6
	4400	4400					1.6	2.0
ISOLATION (dB)	1550	1550				17	22	
	2500	2500	12	20		17	22	
	3700	3700				28	33	
	4400	4400				10	14	
AMPLITUDE UNBALANCE (dB)	1550	1550					0.03	0.2
	2500	2500		0.04	0.3		0.03	0.2
	3700	3700					0.05	0.2
	4400	4400					0.06	0.2
PHASE UNBALANCE (Deg)	1550	1550					0.9	3.0
	2500	2500		0.60	6.0		0.8	4.0
	3700	3700					1.2	4.0
	4400	4400					1.1	4.0
RETURN LOSS - PORT 1,2 ² (dB)	1550	1550					20	
	2500	2500		15.6			29	
	3700	3700					18	
	4400	4400					21	
RETURN LOSS - SUM (dB)	1550	1550					21	
	2500	2500		15.6			33	
	3700	3700					17	
	4400	4400					18	



1. Typical insertion loss displayed are the worst case among Port 1 and Port 2.



2. Typical return loss displayed are the worst case among Port 1 and Port 2.



3) TYPICAL PERFORMANCE GRAPHS AT ROOM TEMPERATURE:

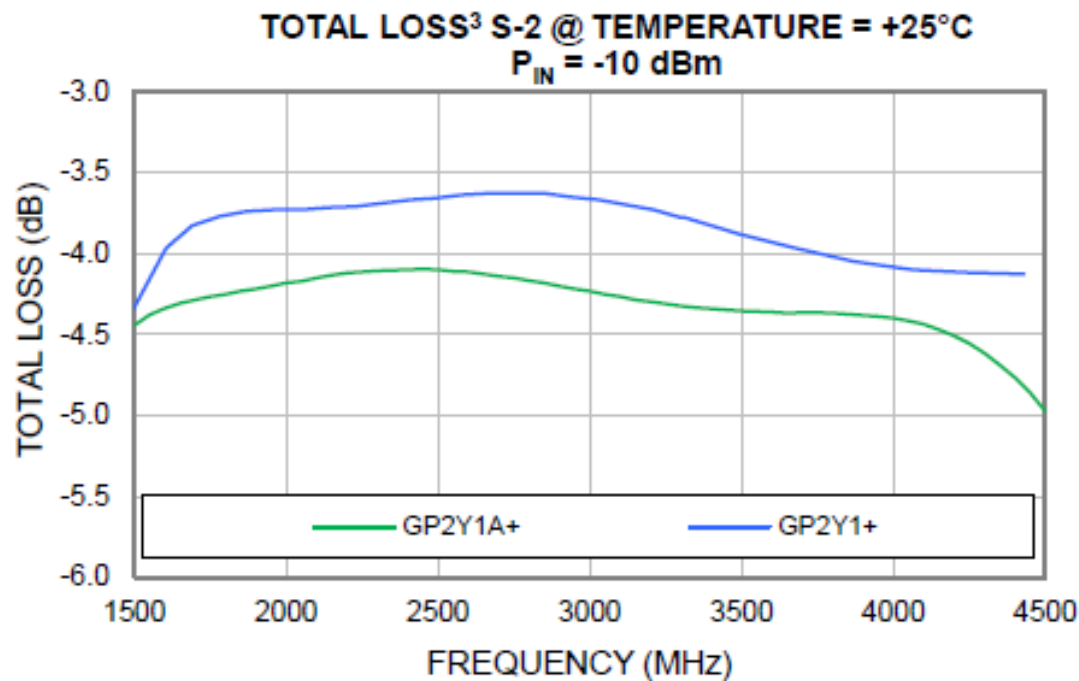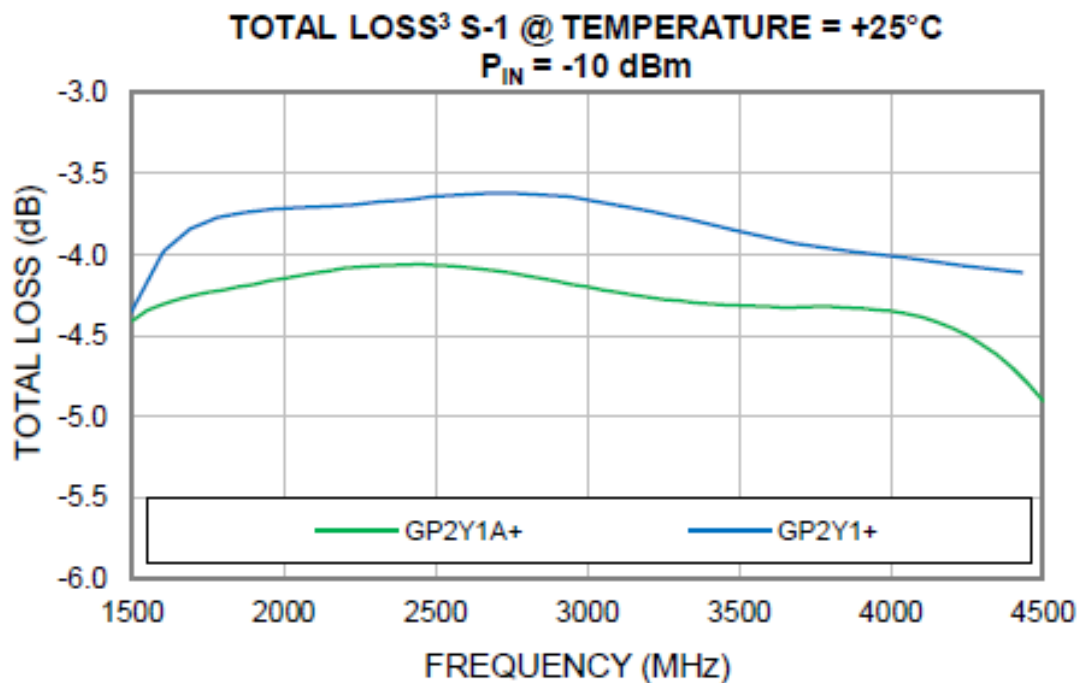

3. Total Loss = Single Path (S-1 or S-2) Insertion Loss + 3 dB Splitter Loss

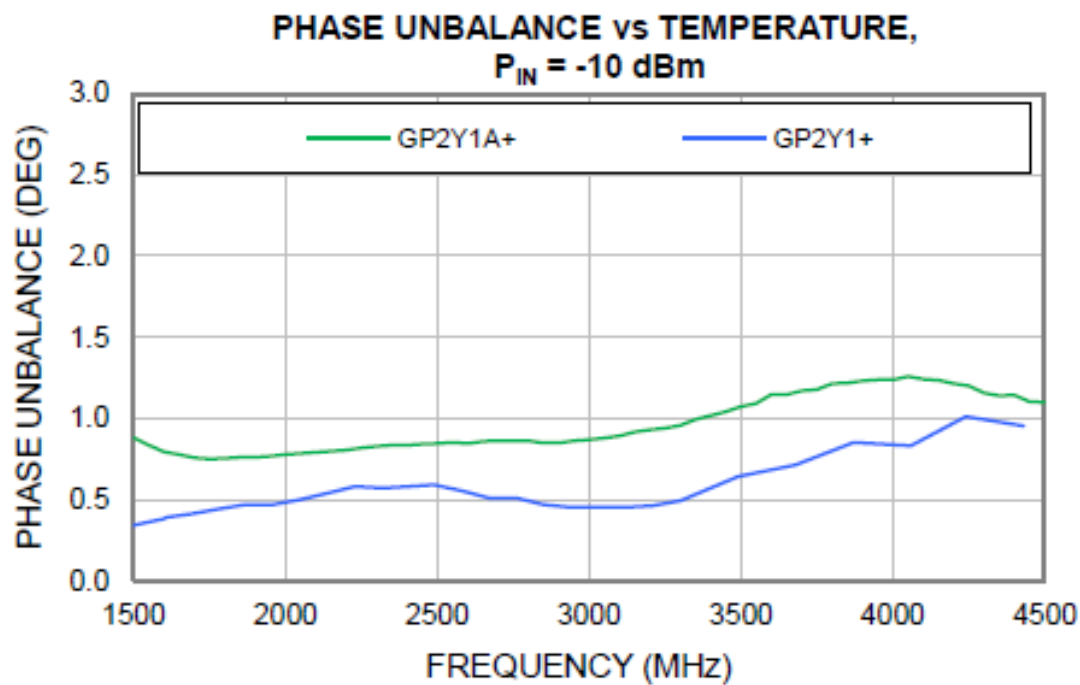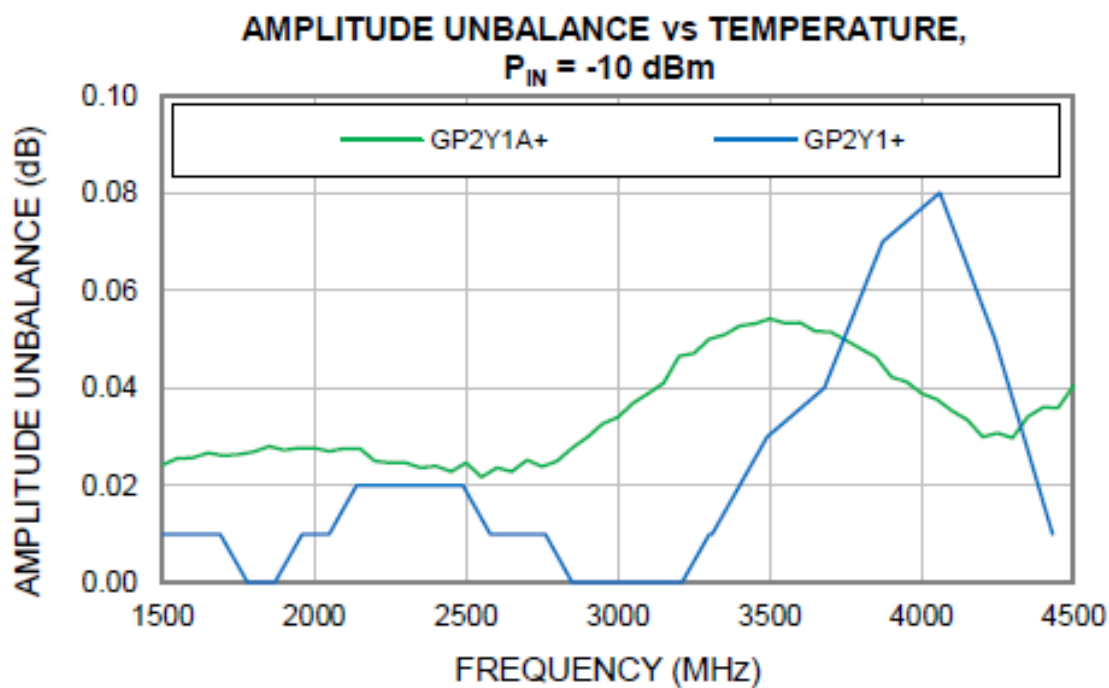

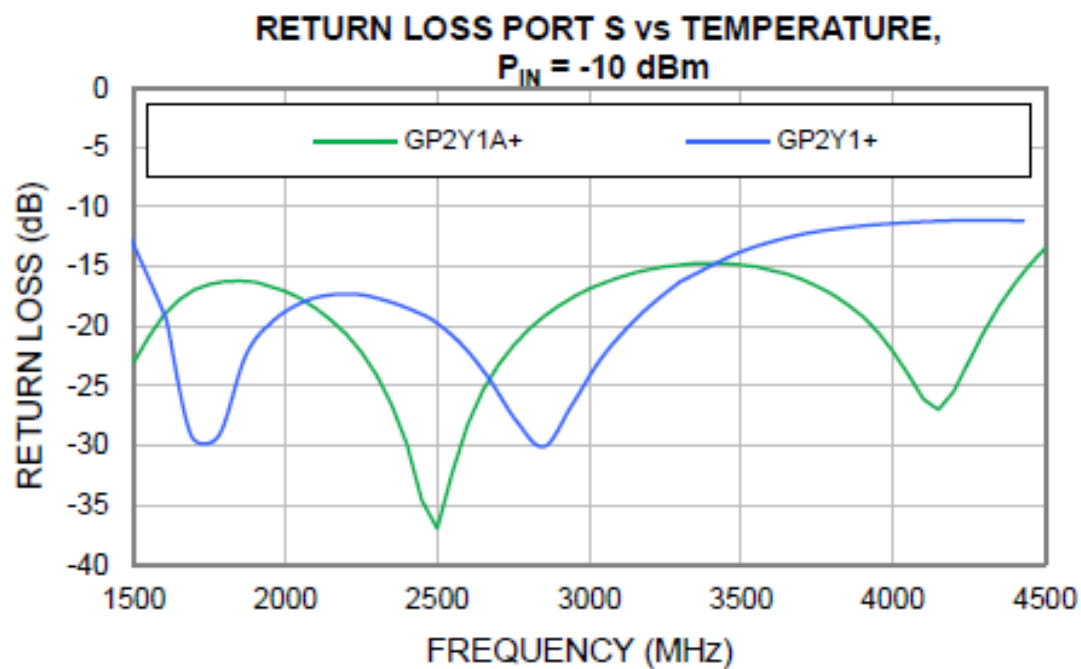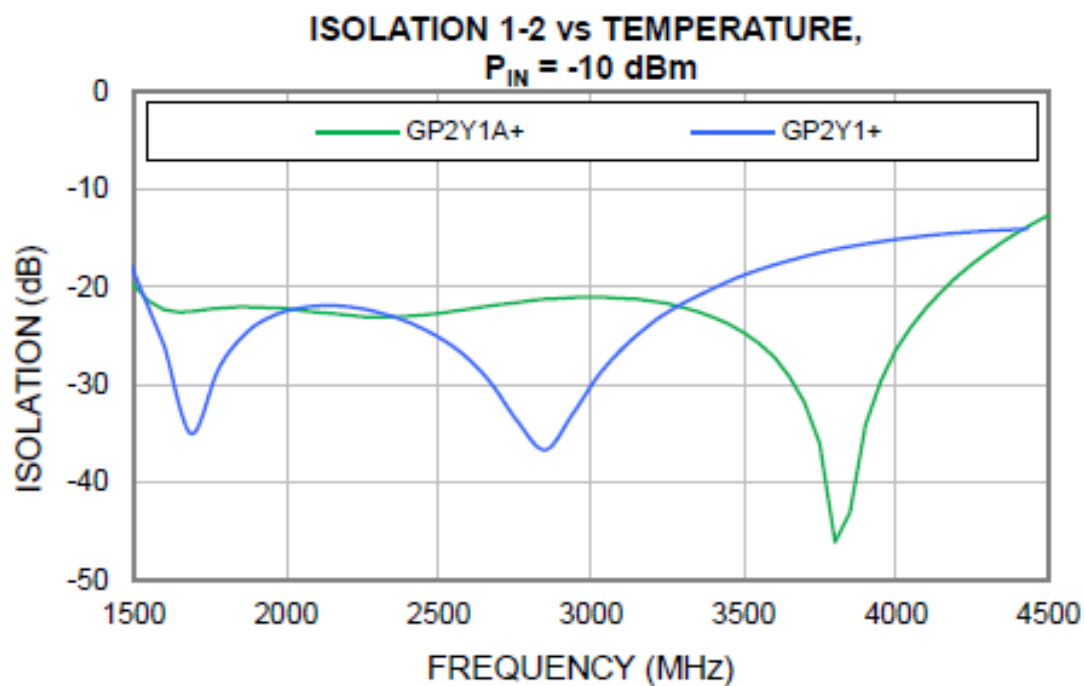

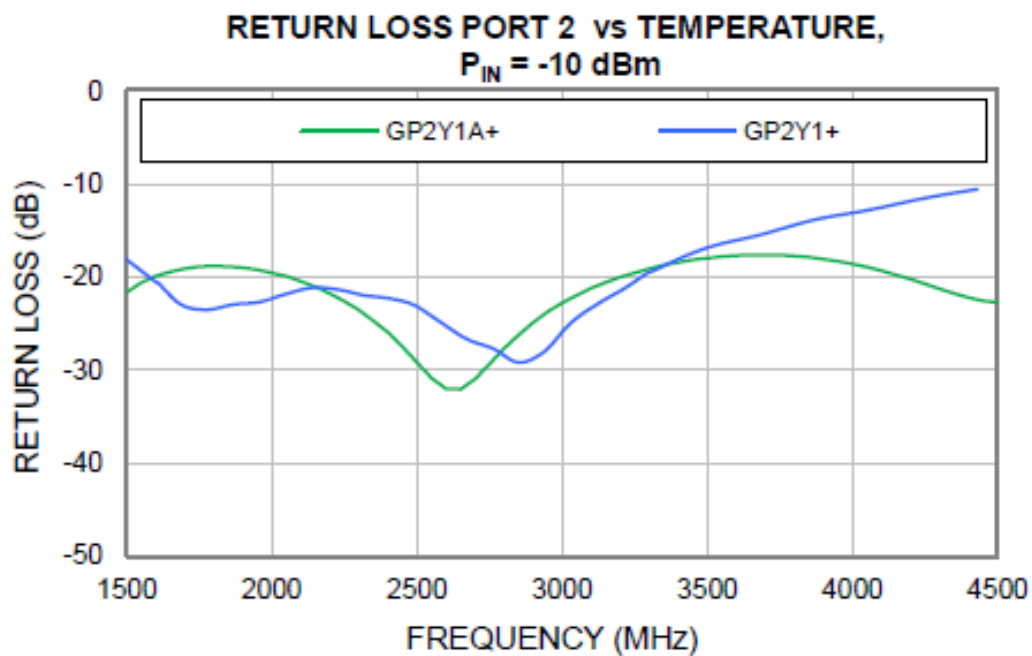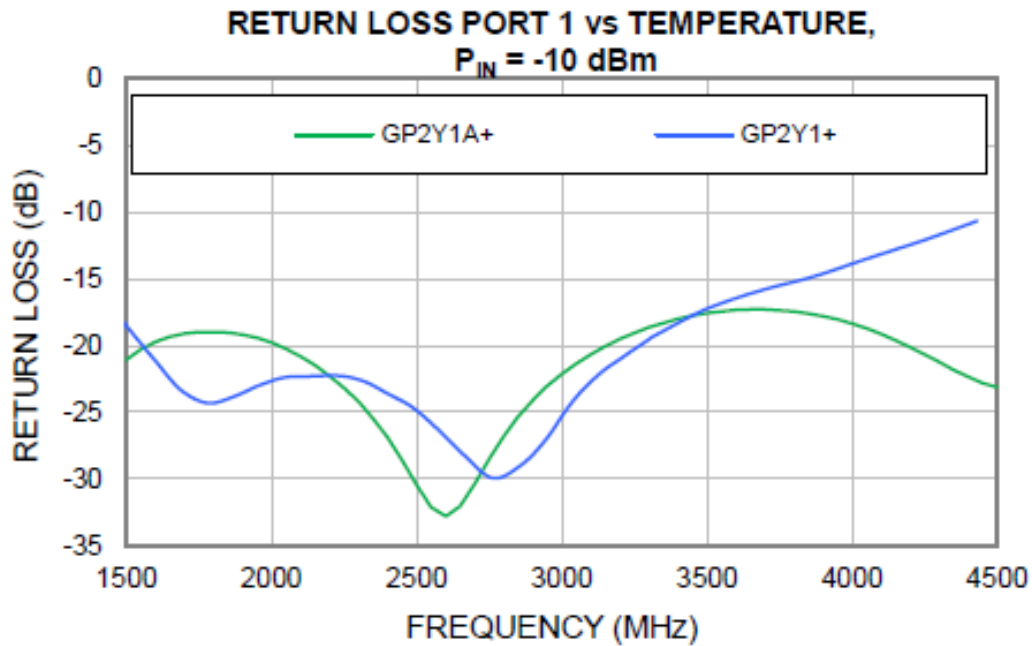



© 2015 Mini-Circuits

IMPORTANT NOTICE

This document is provided as an accommodation to Mini-Circuits customers in connection with Mini-Circuits parts only. In that regard, this document is for informational and guideline purposes only. Mini-Circuits assumes no responsibility for errors or omissions in this document or for any information contained herein.

Mini-Circuits may change this document or the Mini-Circuits parts referenced herein (collectively, the "Materials") from time to time, without notice. Mini-Circuits makes no commitment to update or correct any of the Materials, and Mini-Circuits shall have no responsibility whatsoever on account of any updates or corrections to the Materials or Mini-Circuits' failure to do so. Mini-Circuits customers are solely responsible for the products, systems, and applications in which Mini-Circuits parts are incorporated or used. In that regard, customers are responsible for consulting with their own engineers and other appropriate professionals who are familiar with the specific products and systems into which Mini-Circuits' parts are to be incorporated or used so that the proper selection, installation/integration, use and safeguards are made. Accordingly, Mini-Circuits assumes no liability therefore.

In addition, your use of this document and the information contained herein is subject to Mini-Circuits' standard terms of use, which are available at Mini-Circuits' website at www.minicircuits.com/homepage/terms_of_use.html.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation: (i) by Mini-Circuits of such third-party's products, services, processes, or other information; or (ii) by any such third-party of Mini-Circuits or its products, services, processes, or other information.