

REPLACEMENT PART REFERENCE GUIDE, DVGA2-33+

AN-60-093

ORIGINAL PART:

DVGA2-33+

REPLACEMENT PART:

DVGA2-33A+




Replacement Part has been judged by Mini-Circuits Engineering as a suitable replacement to Original Part^a

MECHANICAL DIMENSIONS & PCB LAND PATTERN


ORIGINAL PART: DVGA2-33+

REPLACEMENT PART: DVGA2-33A+

Case Style DG1677 (No Change)

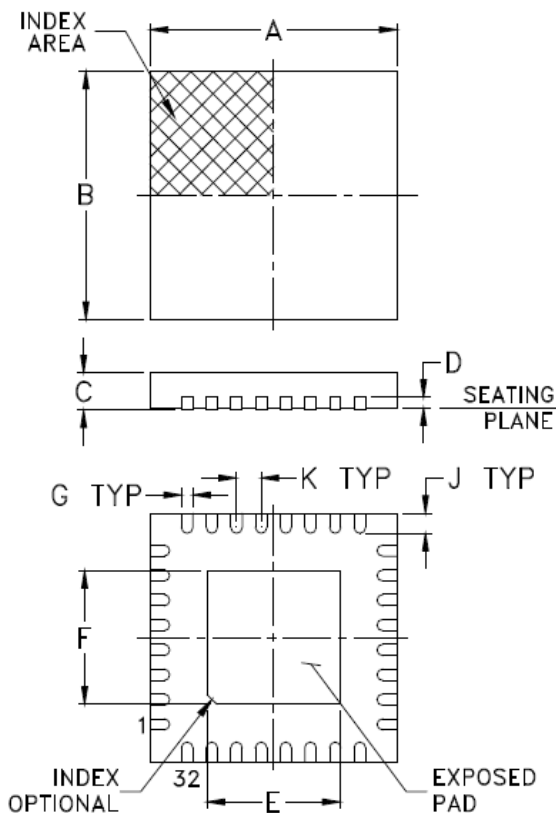

PCB Land Pattern

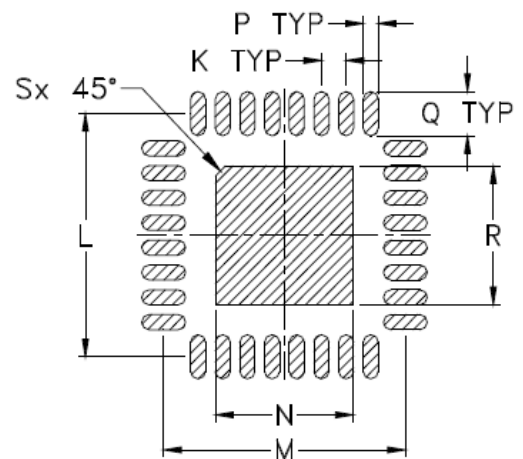

Suggested Layout,
Tolerance to be within ± 0.002

Marking

DVGA2

Marking

DVGA2A

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

CONCLUSION:

1) FORM-FIT-FUNCTIONAL COMPATIBLE₂:

Replacement part is Form, Fit compatible. Following is a summary of changes/improvements:

Typical performance: See paragraphs 2 and 3

Min/Max Specifications seen below,

Parameter	Original Part (DVGA2-33+)	Replacement Part (DVGA2-33A+)
Control Input High Voltage	0.7VD1 min	1.17V min, 3.6V max
Control Input Low Voltage	0.3VD1 max	-0.3V min & 0.6V max
Supply Current, ID1	100µA max (During turn-on and transition between attenuation states ID1 may increase up to 2mA)	200µA max
Control Current	1 µA max	1 µA max except, 30µA typ. for C0.5, C16 and 2µA typ. for LE
Pin Number 8	VD1	No Connection (Will not affect existing PCB layout)
LE pull-up resistor	100kΩ	2MΩ

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

2) PERFORMANCE COMPARISON_a $V_{D1}=3V$, $V_{D2}=5V$:

DVGA2-33A+	Freq (MHz)		YH0336 DVGA2-33A+ 1 Units in TB-674A+ @25degC			DVGA2-33+ 1 Unit in TB-674+ @25degC		
	From	To	Min.	Avg.	Max.	Min.	Avg.	Max.
GAIN (dB)	50	50	20.5	20.5	20.5	20.3	20.3	20.3
	500	500	19.7	19.7	19.7	19.5	19.5	19.5
	1000	1000	19.3	19.3	19.3	19.1	19.1	19.1
	2000	2000	18.1	18.1	18.1	18.1	18.1	18.1
	3000	3000	16.1	16.1	16.1	15.4	15.4	15.4
0.5dB Step Attenuation	50	1000	0.52	0.52	0.52	0.48	0.48	0.51
	1000	3000	0.52	0.55	0.61	0.47	0.50	0.59
1dB Step Attenuation	50	1000	1.01	1.02	1.02	0.99	1.00	1.01
	1000	3000	1.01	1.06	1.16	1.00	1.04	1.09
2dB Step Attenuation	50	1000	1.98	2.00	2.03	1.99	2.03	2.06
	1000	3000	1.98	2.04	2.21	2.04	2.12	2.31
4dB Step Attenuation	50	1000	3.96	3.98	4.01	3.97	4.02	4.05
	1000	3000	3.93	4.03	4.30	4.01	4.12	4.31
8dB Step Attenuation	50	1000	7.90	7.93	7.96	7.89	7.91	7.94
	1000	3000	7.90	8.07	8.57	7.90	8.08	8.31
16dB Step Attenuation	50	1000	15.83	15.88	15.93	15.80	15.80	15.85
	1000	3000	15.83	16.08	16.73	15.83	16.12	16.49
INPUT RETURN LOSS (dB)	50	50	13.2	13.2	13.2	13.7	13.7	13.7
	500	500	14.4	16.0	17.0	17.0	17.0	17.0
	1000	1000	12.8	12.8	12.8	13.6	13.6	13.6
	2000	2000	12.7	12.7	12.7	18.9	18.9	18.9
	3000	3000	10.9	10.9	10.9	19.3	19.3	19.3
OUTPUT RETURN LOSS (dB)	50	50	16.6	16.6	16.6	25.1	25.1	25.1
	500	500	16.0	16.0	16.0	23.2	23.2	23.2
	1000	1000	13.8	13.8	13.8	18.7	18.7	18.7
	2000	2000	15.1	15.1	15.1	19.9	19.9	19.9
	3000	3000	10.2	10.2	10.2	17.1	17.1	17.1
P1dB (dBm)	50	50	16.5	16.5	16.5	17.3	17.3	17.3
	500	500	16.7	16.7	16.7	17.1	17.1	17.1
	1000	1000	16.4	16.4	16.4	16.5	16.5	16.5
	2000	2000	18.0	18.0	18.0	17.7	17.7	17.7
	3000	3000	16.1	16.1	16.1	16.7	16.7	16.7
OIP3 (dBm)	50	50	31.7	31.7	31.7	32.8	32.8	32.8
	500	500	31.2	31.2	31.2	31.6	31.6	31.6
	1000	1000	30.1	30.1	30.1	30.2	30.2	30.2
	2000	2000	31.3	31.3	31.3	31.0	31.0	31.0
	3000	3000	29.0	29.0	29.0	29.8	29.8	29.8
NF (dB)	50	50	4.8	4.8	4.8	4.9	4.9	4.9
	500	500	4.8	4.8	4.8	5.1	5.1	5.1
	1000	1000	5.1	5.1	5.1	5.3	5.3	5.3
	2000	2000	5.3	5.3	5.3	5.6	5.6	5.6
	3000	3000	5.4	5.4	5.4	6.5	6.5	6.5


Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

3) PERFORMANCE COMPARISON CURVES $V_{D1}=3V, V_{D2}=5V$:










Data of Replacement Part

Data of Original Part

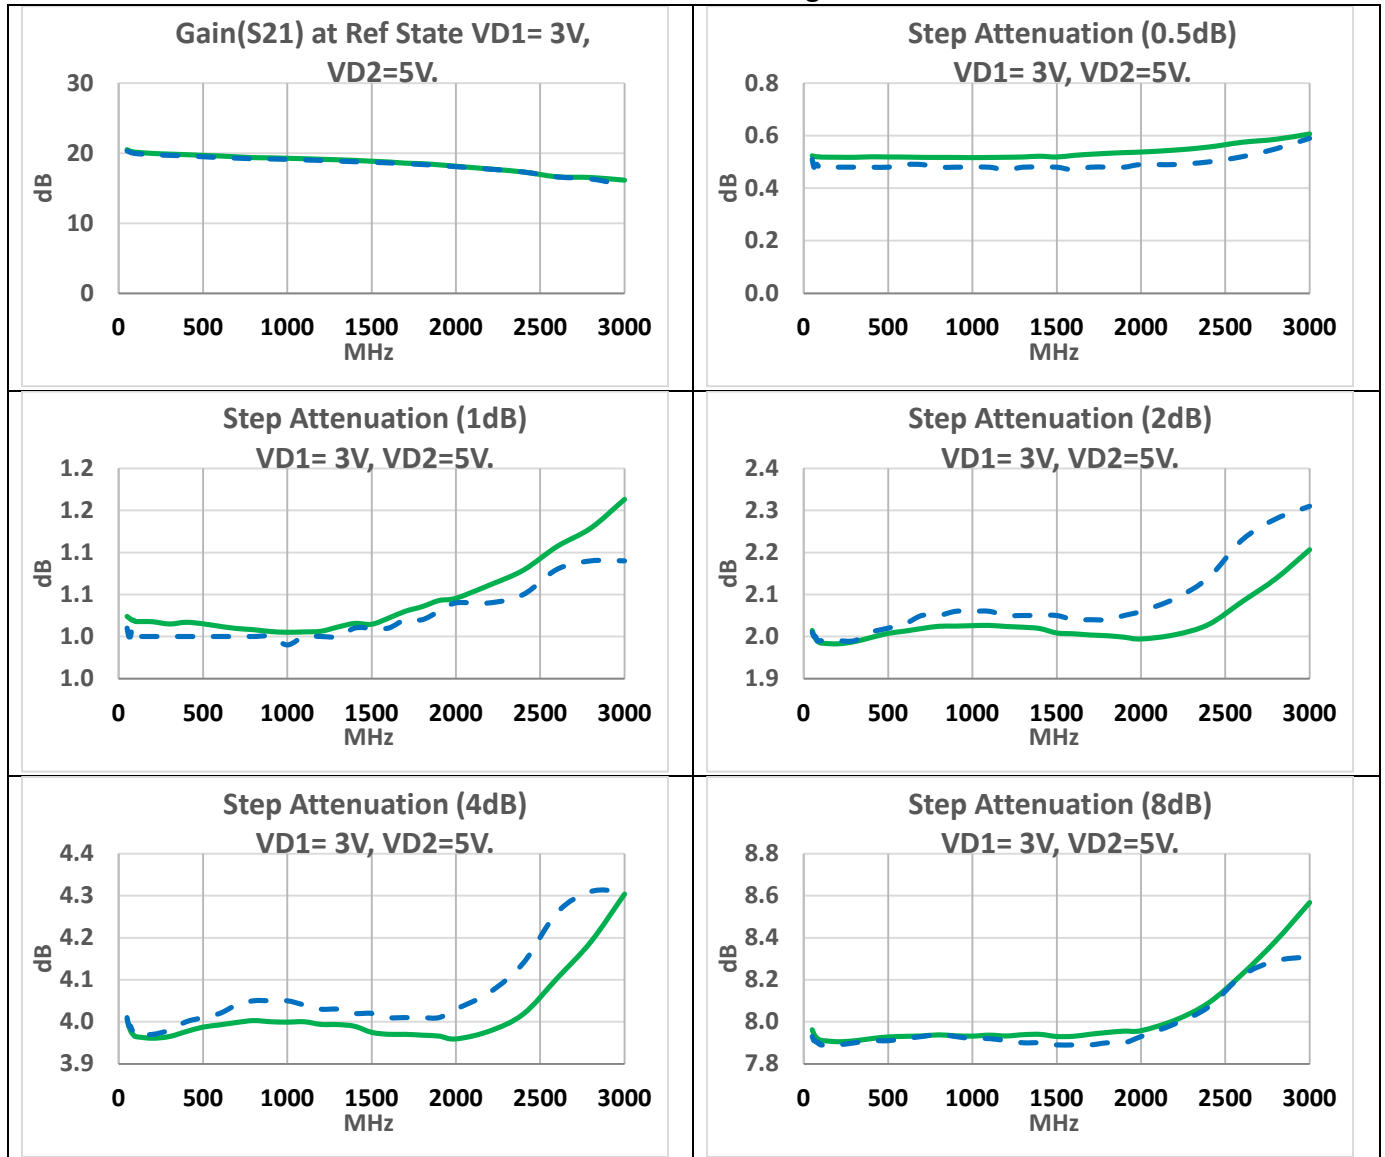

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

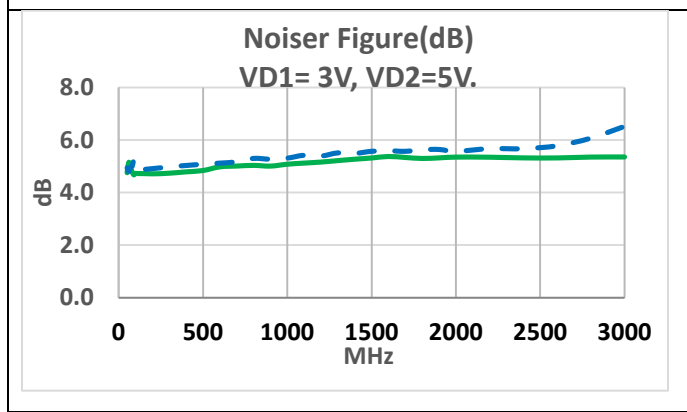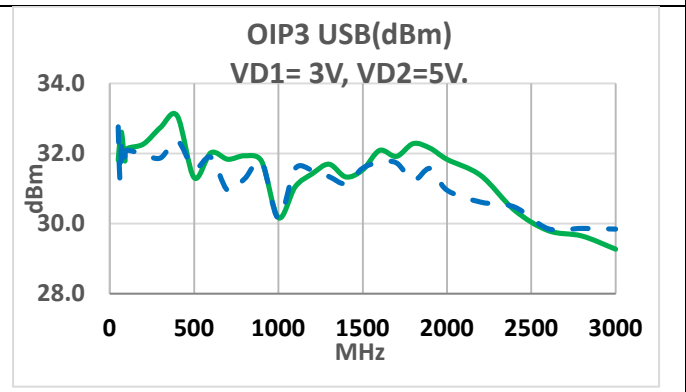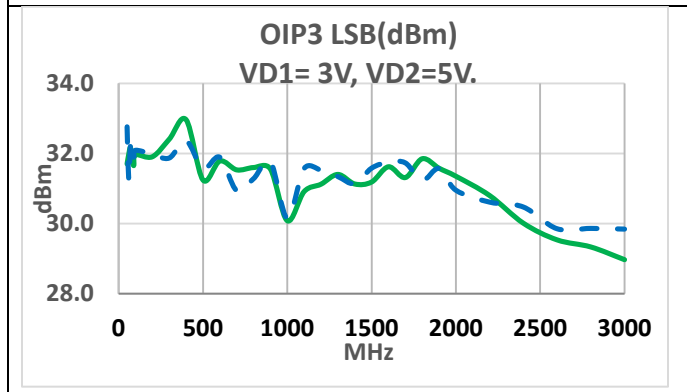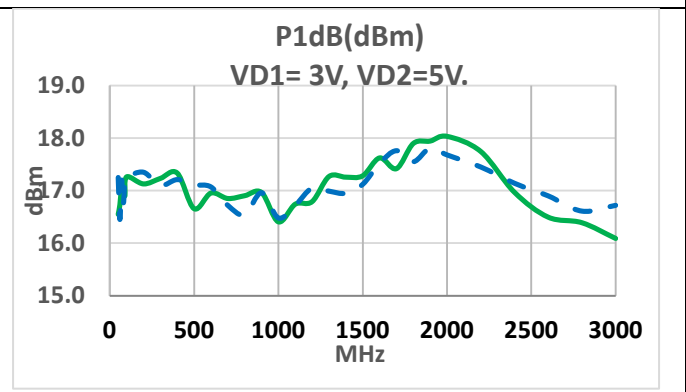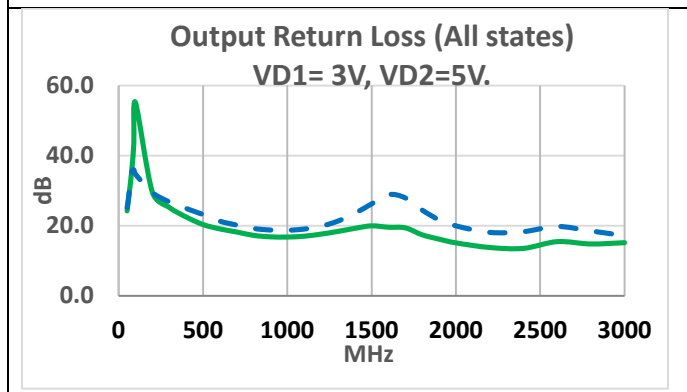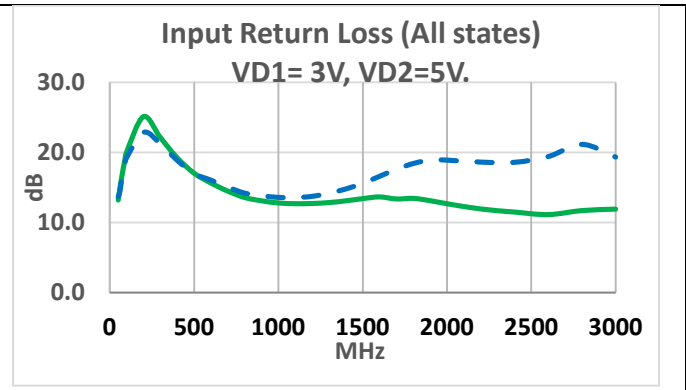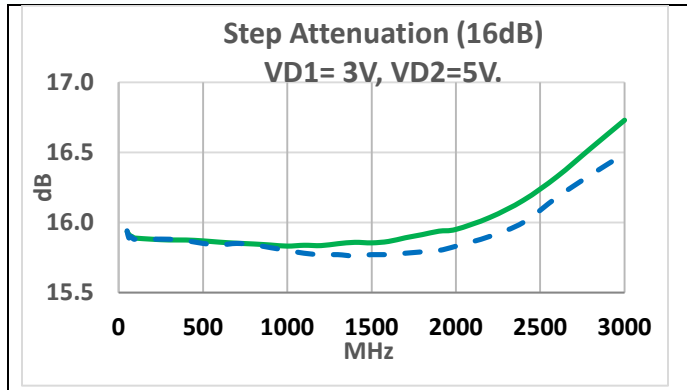

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

IMPORTANT NOTICE

© 2015 Mini-Circuits

This document is provided as an accommodation to Mini-Circuits customers in connection with Mini-Circuits parts only. In that regard, this document is for informational and guideline purposes only. Mini-Circuits assumes no responsibility for errors or omissions in this document or for any information contained herein.

Mini-Circuits may change this document or the Mini-Circuits parts referenced herein (collectively, the "Materials") from time to time, without notice. Mini-Circuits makes no commitment to update or correct any of the Materials, and Mini-Circuits shall have no responsibility whatsoever on account of any updates or corrections to the Materials or Mini-Circuits' failure to do so.

Mini-Circuits customers are solely responsible for the products, systems, and applications in which Mini-Circuits parts are incorporated or used. In that regard, customers are responsible for consulting with their own engineers and other appropriate professionals who are familiar with the specific products and systems into which Mini-Circuits' parts are to be incorporated or used so that the proper selection, installation/integration, use and safeguards are made. Accordingly, Mini-Circuits assumes no liability therefore.

In addition, your use of this document and the information contained herein is subject to Mini-Circuits' standard terms of use, which are available at Mini-Circuits' website at www.minicircuits.com/homepage/terms_of_use.html.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation: (i) by Mini-Circuits of such third-party's products, services, processes, or other information; or (ii) by any such third-party of Mini-Circuits or its products, services, processes, or other information.

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.