

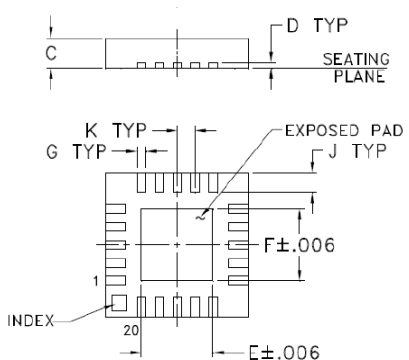
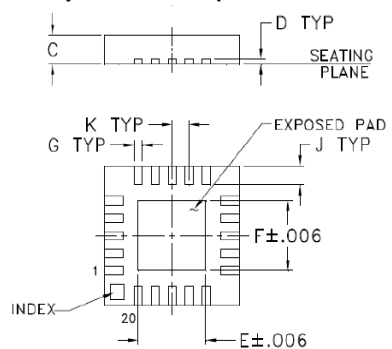

REPLACEMENT PART REFERENCE GUIDE, DAT-3175-PP+

AN-70-026

ORIGINAL PART: DAT-3175-PP+
 REPLACEMENT PART: DAT-3175A-PP+

Replacement Part has been judged by Mini-Circuits Engineering as a suitable replacement to Original Part^a

MECHANICAL DIMENSIONS & PCB LAND PATTERN

ORIGINAL PART: DAT-3175-PP+	REPLACEMENT PART: DAT-3175A-PP+																
<p>Case Style: DG983-1</p>  <p>Inches (mm)</p> <table border="1"> <thead> <tr> <th>C</th> <th>E</th> <th>F</th> <th>G</th> </tr> </thead> <tbody> <tr> <td>.035 (0.90)</td> <td>.081 (2.06)</td> <td>.081 (2.06)</td> <td>.010 (0.25)</td> </tr> </tbody> </table>	C	E	F	G	.035 (0.90)	.081 (2.06)	.081 (2.06)	.010 (0.25)	<p>Case Style: DG983-2 (minor dimensional changes as below)</p>  <p>inches (mm)</p> <table border="1"> <thead> <tr> <th>C</th> <th>E</th> <th>F</th> <th>G</th> </tr> </thead> <tbody> <tr> <td>.033 (0.85)</td> <td>.085 (2.15)</td> <td>.085 (2.15)</td> <td>.009 (0.23)</td> </tr> </tbody> </table> <p>Note: Dimensions not shown are same as that in DG983-1</p>	C	E	F	G	.033 (0.85)	.085 (2.15)	.085 (2.15)	.009 (0.23)
C	E	F	G														
.035 (0.90)	.081 (2.06)	.081 (2.06)	.010 (0.25)														
C	E	F	G														
.033 (0.85)	.085 (2.15)	.085 (2.15)	.009 (0.23)														
<p>Suggested PCB Land Pattern</p>  <table border="1"> <thead> <tr> <th>K</th> <th>L</th> <th>M</th> <th>N</th> <th>P</th> <th>Q</th> <th>R</th> </tr> </thead> <tbody> <tr> <td>.020 (0.50)</td> <td>.177 (4.50)</td> <td>.177 (4.50)</td> <td>.081 (2.06)</td> <td>.010 (0.25)</td> <td>.032 (0.81)</td> <td>.081 (2.06)</td> </tr> </tbody> </table>		K	L	M	N	P	Q	R	.020 (0.50)	.177 (4.50)	.177 (4.50)	.081 (2.06)	.010 (0.25)	.032 (0.81)	.081 (2.06)		
K	L	M	N	P	Q	R											
.020 (0.50)	.177 (4.50)	.177 (4.50)	.081 (2.06)	.010 (0.25)	.032 (0.81)	.081 (2.06)											
<p>Marking</p> <p>3175</p>	<p>Marking</p> <p>DS75</p>																

Notes:
 a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

CONCLUSION:

1) FORM-FIT-FUNCTIONAL COMPATIBLE^a:

Replacement part is Form, Fit compatible. Following is a summary of changes/improvements:

Typical performance: see part 2) and 3)

For Min/Max Specifications, see below:

Parameter		DAT-3175-PP+ (Original Part)		DAT-3175A-PP+ (Replacement Part)	
Frequency (GHz)		DC-2.0		0.001-2.5	
VDD(V)		+2.7 to +3.3		+2.3 to +3.6, usable to +5.2V	
Control input High (V)		0.7V _{DD} to V _{DD}		+1.17 to +3.6	
Control input Low (V)		0 to 0.3V _{DD}		-0.3 to +0.6(0V during power-up)	
I _{DD} (μA)		100 μA max.		200 μA max.	
Control Current (μA)		1 max		20 max	
Attenuation accuracy	Step (dB)	Frequency (GHz)	Spec max	Frequency (GHz)	Spec max
	1	DC-1.2	0.24	0.001-1.2	0.18
		1.2-2.0	0.25	1.2-2.0	0.20
	2	DC-1.2	0.28	0.001-1.2	0.21
		1.2-2.0	0.3	1.2-2.0	0.26
	4	DC-1.2	0.36	0.001-1.2	0.27
		1.2-2.0	0.4	1.2-2.0	0.36
	8	DC-1.2	0.52	0.001-1.2	0.39
		1.2-2.0	0.6	1.2-2.0	0.6
	16	DC-1.2	0.84	0.001-1.2	0.63
1.2-2.0		1	1.2-2.0	1.0	
Operating Temperature (°C)		-40 to 85		-40 to 105	
Storage Temperature(°C)		-55 to 100		-65 to 150	
ESD (HBM)		< 500V		1000 to <2000V	
ESD (MM)		<100V		500 to <1000V	
Max Operating Power		Not Specified		From 1-30 MHz per Figure 1 (in Model Data Sheet) and +24 dBm above 30 MHz	
Max Input Power		+24 dBm		1-30 MHz (10-24 dBm) per Figure 2 of data Sheet >30 MHz: +30 dBm	
Absolute Max Rating: Vdd(v)		-0.3V Min., 4V Max.		-0.3V Min., 5.5V Max.	
Absolute Max Rating: Voltage on any digital input (V)		-0.3V Min., Vdd+0.3V Max.		-0.3V Min., 3.6V Max.	

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

2) PERFORMANCE COMPARISON_a (TYPICAL), DC Voltage=3V:

DAT-3175A-PP+ VS. DAT-3175-PP+	Freq (MHz)		DAT-3175A-PP+ Data of 2 Units on TB-337			DAT-3175-PP+ Data of 1 Units on TB-337		
	From	To	Min.	Avg.	Max.	Min.	Avg.	Max.
STEP ATTENUATION 0dB (dB)	10	1200	1.1	1.3	1.5	1.0	1.2	1.4
	1200	2000	1.3	1.5	1.5	1.4	1.4	1.5
	2000	2500	1.3	1.4	1.7	1.5	2.0	2.5
STEP ATTENUATION 1dB (dB)	10	1200	0.99	1.00	1.02	0.97	0.98	0.99
	1200	2000	1.00	1.01	1.04	0.95	0.97	0.98
	2000	2500	0.98	1.04	1.06	0.81	0.89	0.95
STEP ATTENUATION 2dB (dB)	10	1200	2.00	2.01	2.04	2.05	2.07	2.09
	1200	2000	2.00	2.02	2.09	2.09	2.10	2.13
	2000	2500	2.00	2.09	2.13	1.99	2.09	2.13
STEP ATTENUATION 4dB (dB)	10	1200	3.95	3.99	4.03	4.01	4.04	4.06
	1200	2000	3.96	4.04	4.20	4.02	4.04	4.05
	2000	2500	4.18	4.26	4.31	3.79	3.95	4.04
STEP ATTENUATION 8dB (dB)	10	1200	7.90	7.97	8.03	8.01	8.04	8.07
	1200	2000	7.94	8.08	8.35	7.95	8.00	8.05
	2000	2500	8.31	8.42	8.50	7.56	7.81	7.95
STEP ATTENUATION 16dB (dB)	10	1200	15.9	16.0	16.0	15.9	16.1	16.2
	1200	2000	15.9	16.1	16.4	15.4	15.7	15.9
	2000	2500	16.4	16.5	16.6	14.7	15.1	15.4
INPUT RETURN LOSS 0dB (dB)	10	1200	15.9	17.7	19.4	15.0	17.7	20.2
	1200	2000	14.8	16.2	19.2	19.6	22.8	30.4
	2000	2500	12.3	20.0	27.7	9.6	17.4	30.4
INPUT RETURN LOSS 1dB (dB)	10	1200	16.6	18.6	21.2	16.1	18.7	21.5
	1200	2000	15.2	16.5	19.7	19.3	21.1	30.5
	2000	2500	13.8	23.6	46.3	11.7	22.5	41.9
INPUT RETURN LOSS 2dB (dB)	10	1200	16.7	19.0	22.1	14.5	17.1	20.0
	1200	2000	15.8	17.0	20.6	16.9	23.3	32.5
	2000	2500	14.5	23.1	34.7	9.9	16.1	26.0
INPUT RETURN LOSS 4dB (dB)	10	1200	19.3	25.1	35.6	14.5	17.3	20.6
	1200	2000	16.6	17.7	20.2	16.1	22.9	32.4
	2000	2500	14.9	18.1	19.9	10.6	16.4	25.4
INPUT RETURN LOSS 8dB (dB)	10	1200	18.9	27.3	51.7	14.7	17.9	21.5
	1200	2000	17.7	18.4	20.0	15.6	23.5	42.7
	2000	2500	14.1	16.5	18.2	12.1	18.1	28.1
INPUT RETURN LOSS 16dB (dB)	10	1200	19.0	28.6	54.7	16.1	20.5	25.4
	1200	2000	16.4	18.2	20.2	16.4	20.5	25.7
	2000	2500	13.8	15.4	16.9	15.3	20.1	25.4
OUTPUT RETURN LOSS 0dB (dB)	10	1200	16.1	17.7	19.4	15.4	17.8	20.2
	1200	2000	14.4	15.7	17.4	18.9	20.5	23.8
	2000	2500	12.3	17.4	21.1	9.3	15.4	23.5
OUTPUT RETURN LOSS 1dB (dB)	10	1200	16.6	18.4	20.9	15.1	17.4	20.0
	1200	2000	15.0	16.2	18.9	17.4	20.2	24.4
	2000	2500	13.8	19.9	25.9	9.6	15.6	23.7
OUTPUT RETURN LOSS 2dB (dB)	10	1200	16.8	19.0	22.2	17.2	19.9	23.3
	1200	2000	15.6	16.7	20.2	18.3	19.9	27.7
	2000	2500	15.1	22.6	33.7	12.7	21.8	33.8
OUTPUT RETURN LOSS 4dB (dB)	10	1200	16.3	19.4	23.6	17.5	20.7	25.0
	1200	2000	16.5	18.6	26.3	17.8	19.4	26.5
	2000	2500	14.6	24.6	38.5	14.3	24.4	44.5
OUTPUT RETURN LOSS 8dB (dB)	10	1200	18.6	27.0	48.8	16.1	20.1	24.4
	1200	2000	18.4	19.2	21.7	16.3	19.6	29.8
	2000	2500	15.6	19.4	22.2	14.8	24.0	36.8
OUTPUT RETURN LOSS 16dB (dB)	10	1200	18.8	28.5	53.0	14.5	18.3	22.2
	1200	2000	18.1	19.0	19.9	14.8	20.4	34.7
	2000	2500	15.2	17.7	19.7	13.4	20.9	34.7
RETURN LOSS (All States) (dB)	10	1200	15.9	17.7	19.4	14.5	17.1	20.0
	1200	2000	14.4	15.7	17.4	14.8	17.5	20.7
	2000	2500	12.3	14.8	16.1	9.3	15.4	21.9

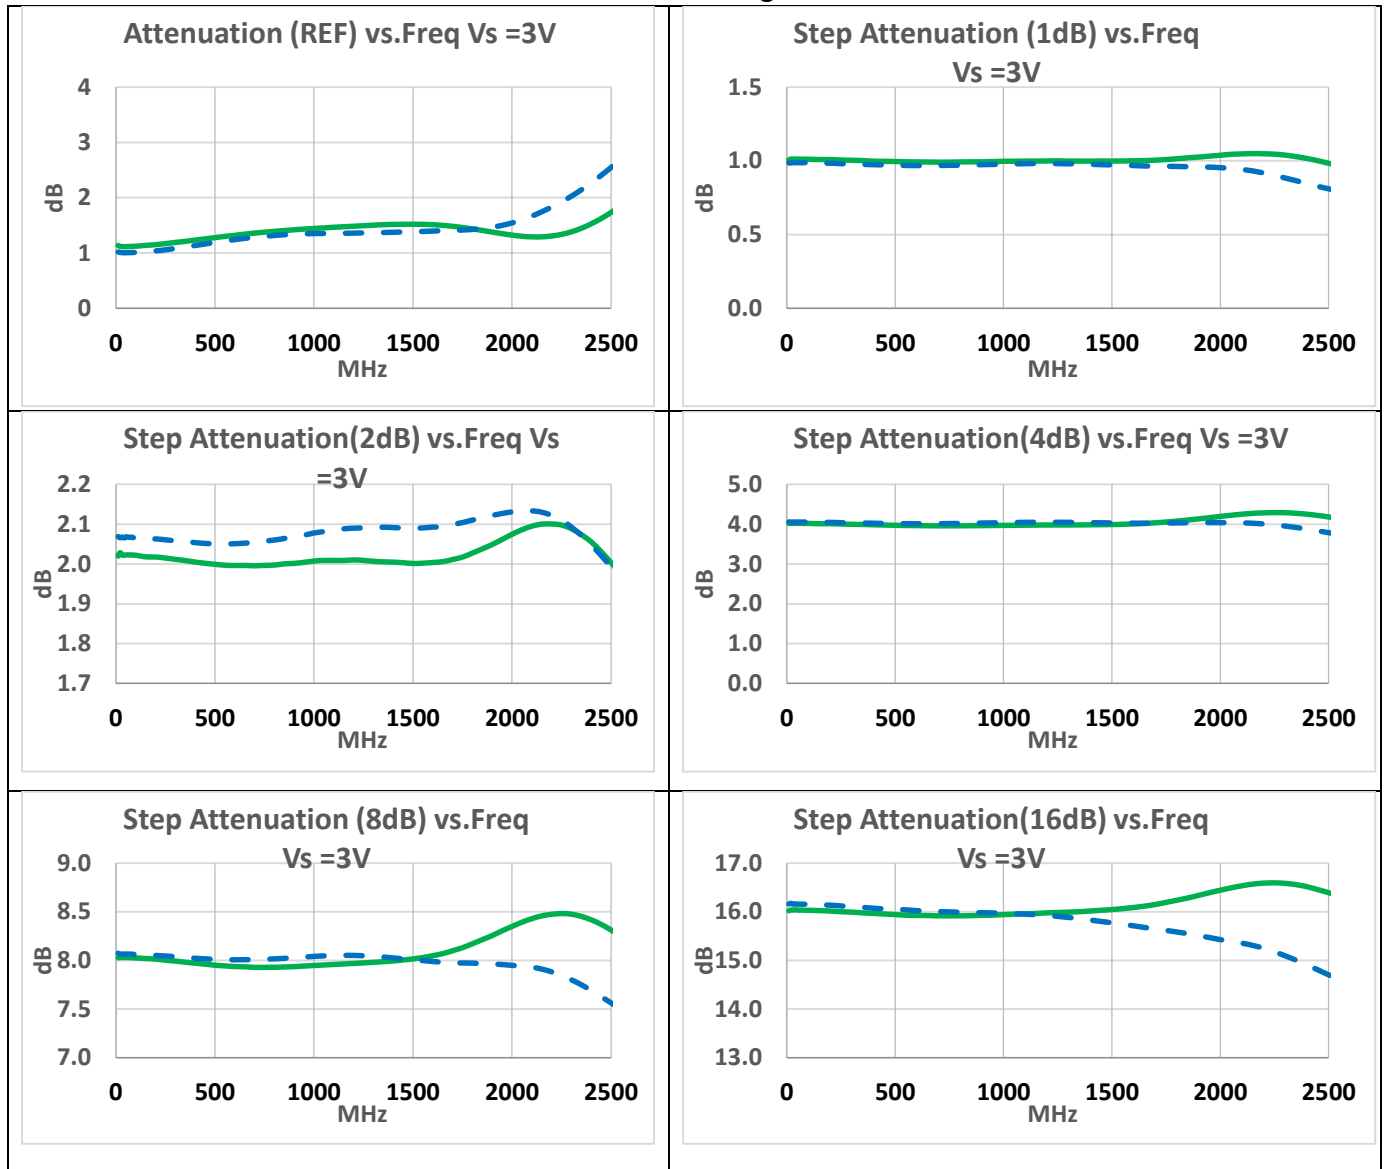
Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

3) PERFORMANCE COMPARISON CURVES_a (TYPICAL), DC Supply=3V:

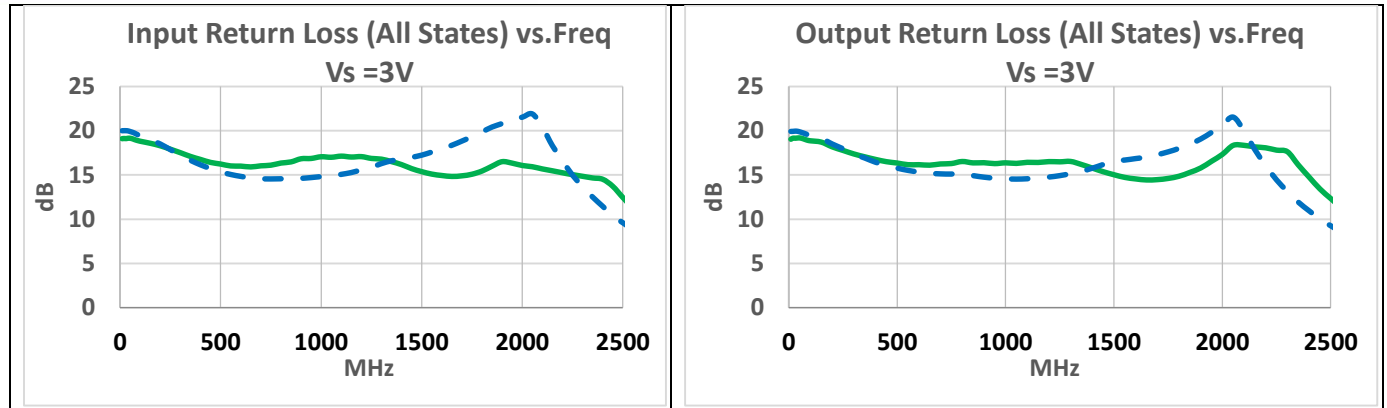


Data of Replacement Part

Data of Original Part



Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.



IMPORTANT NOTICE

© 2015 Mini-Circuits

This document is provided as an accommodation to Mini-Circuits customers in connection with Mini-Circuits parts only. In that regard, this document is for informational and guideline purposes only. Mini-Circuits assumes no responsibility for errors or omissions in this document or for any information contained herein.

Mini-Circuits may change this document or the Mini-Circuits parts referenced herein (collectively, the "Materials") from time to time, without notice. Mini-Circuits makes no commitment to update or correct any of the Materials, and Mini-Circuits shall have no responsibility whatsoever on account of any updates or corrections to the Materials or Mini-Circuits' failure to do so.

Mini-Circuits customers are solely responsible for the products, systems, and applications in which Mini-Circuits parts are incorporated or used. In that regard, customers are responsible for consulting with their own engineers and other appropriate professionals who are familiar with the specific products and systems into which Mini-Circuits' parts are to be incorporated or used so that the proper selection, installation/integration, use and safeguards are made. Accordingly, Mini-Circuits assumes no liability therefore.

In addition, your use of this document and the information contained herein is subject to Mini-Circuits' standard terms of use, which are available at Mini-Circuits' website at www.minicircuits.com/homepage/terms_of_use.html.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation: (i) by Mini-Circuits of such third-party's products, services, processes, or other information; or (ii) by any such third-party of Mini-Circuits or its products, services, processes, or other information.

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.