
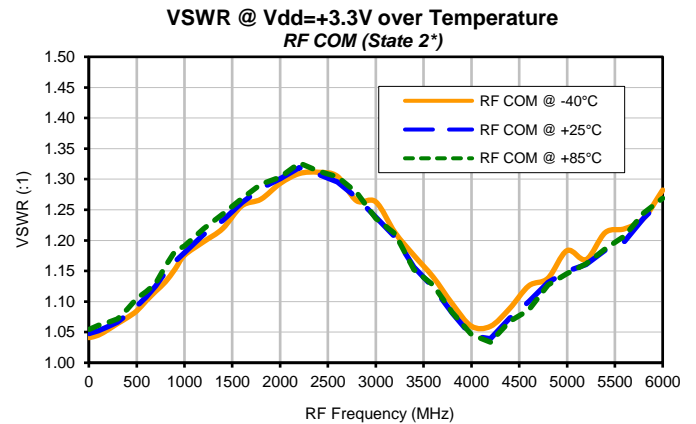
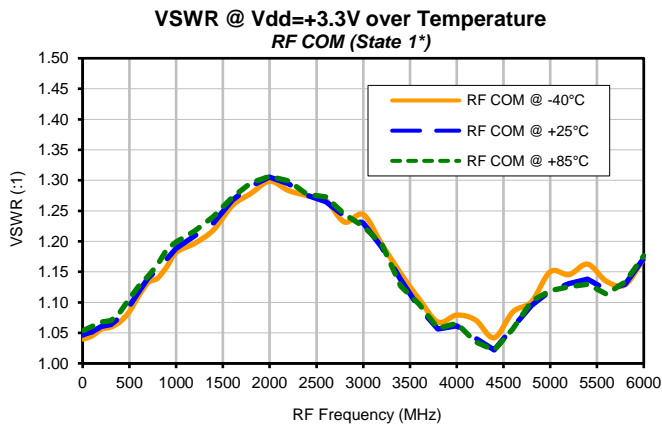
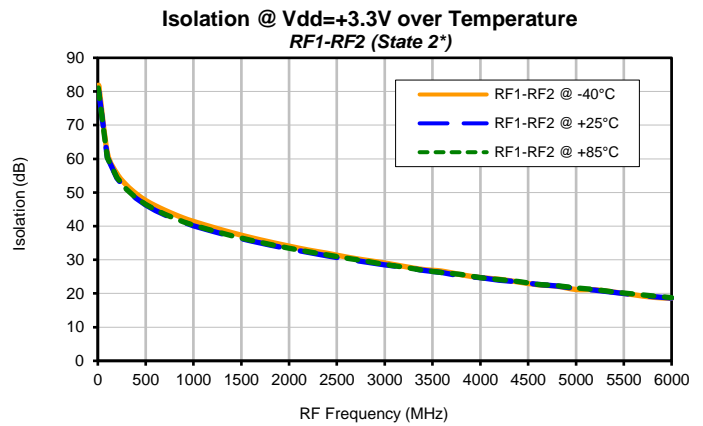
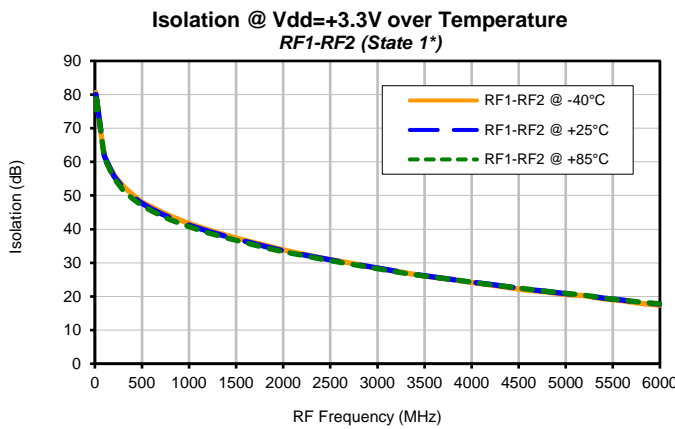
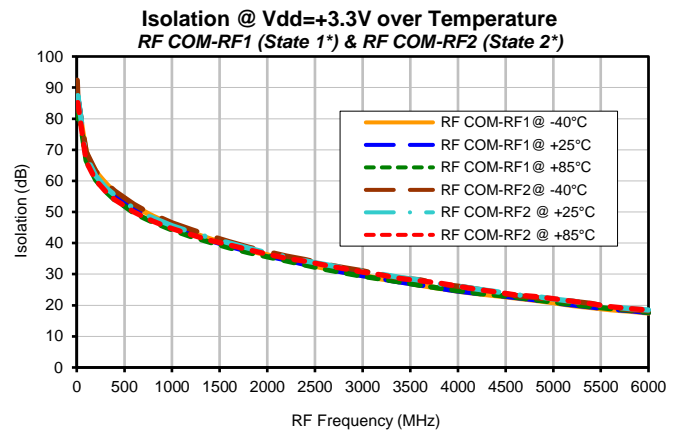


Typical Performance Curves

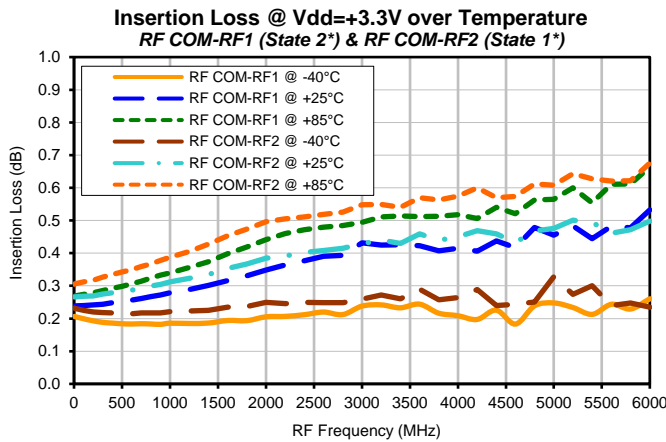


*Note:


STATE	CONTROL INPUT	RF Com to RF1	RF Com to RF2
1	Low	OFF	ON
2	High	ON	OFF

Typical Performance Curves


**VSWR @ Vdd=+3.3V over Temperature
RF1 (State 2*)**

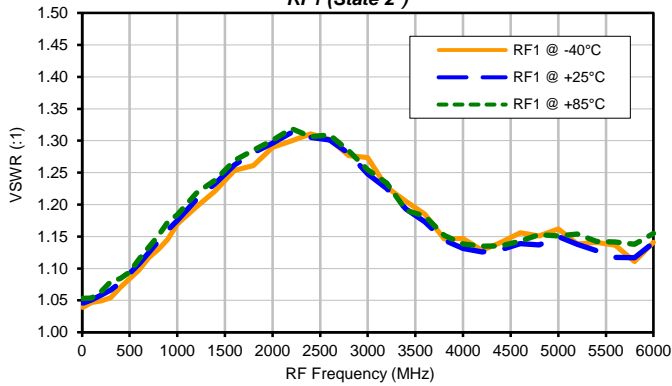


**VSWR @ Vdd=+3.3V over Temperature
RF1 (State 1*)**

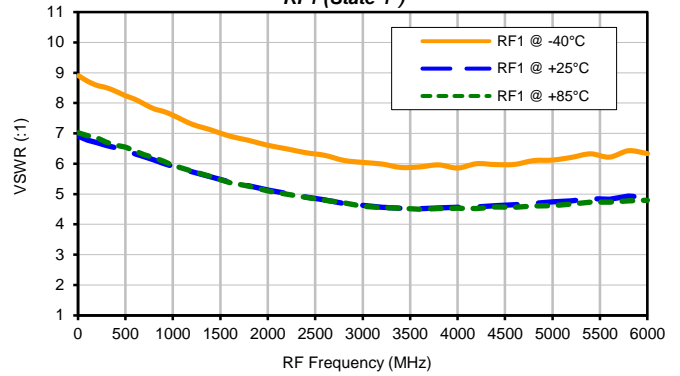

**VSWR @ Vdd=+3.3V over Temperature
RF2 (State 1*)**

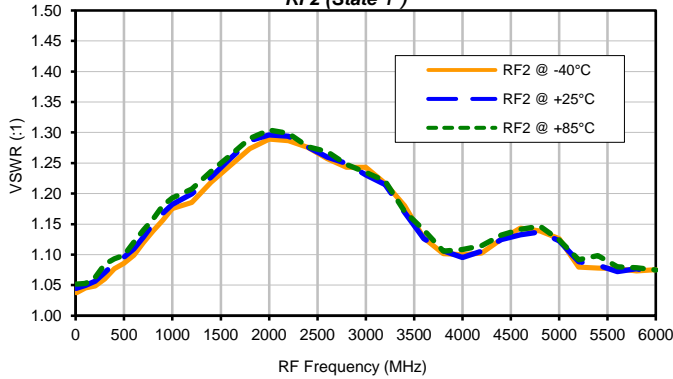

**VSWR @ Vdd=+3.3V over Temperature
RF2 (State 2*)**

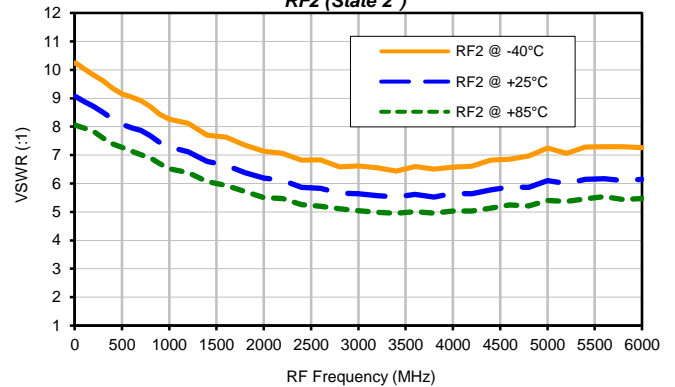

*Note:

STATE	CONTROL INPUT	RF Com to RF1	RF Com to RF2
1	Low	OFF	ON
2	High	ON	OFF