



Typical Performance Curves


GAIN vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, Vd = 5.00V

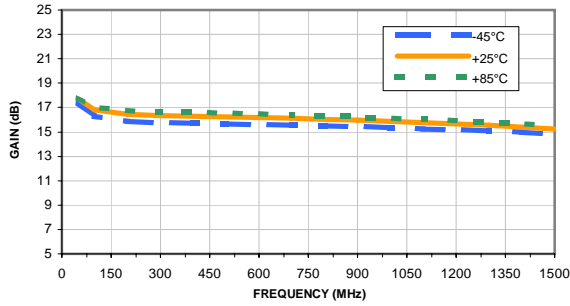


GAIN vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

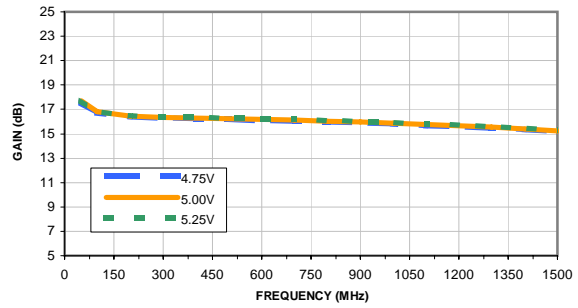


AMPLITUDE UNBALANCE vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, Vd = 5.00V

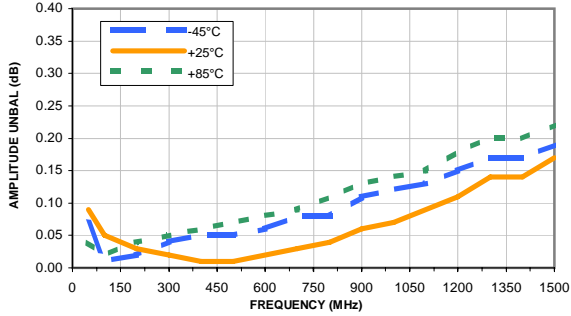


AMPLITUDE UNBALANCE vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

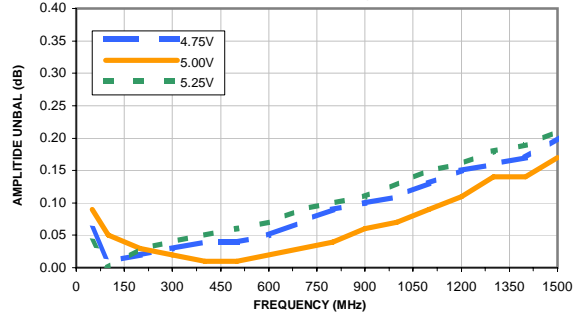


PHASE UNBALANCE vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, Vd = 5.00V

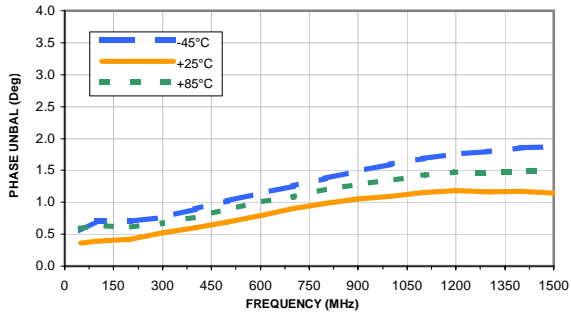


PHASE UNBALANCE vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

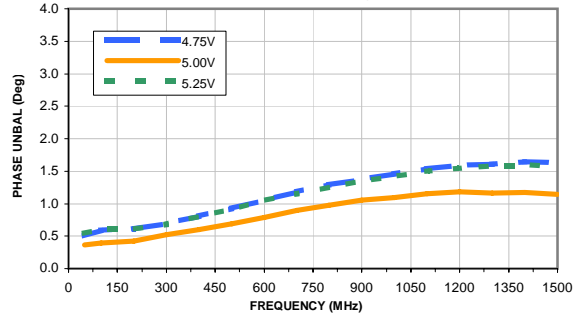









ISOLATION vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, Vd = 5.00V

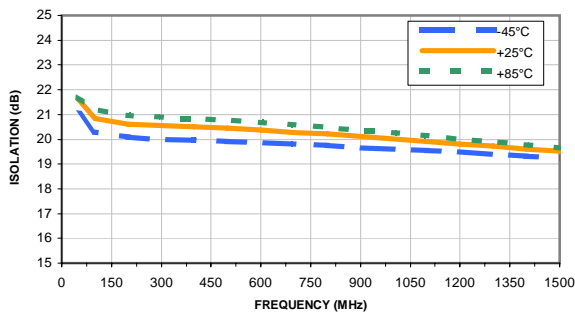

ISOLATION vs. FREQUENCY & DEVICE VOLTAGE
INPUT POWER = -25dBm, Temperature = +25°C

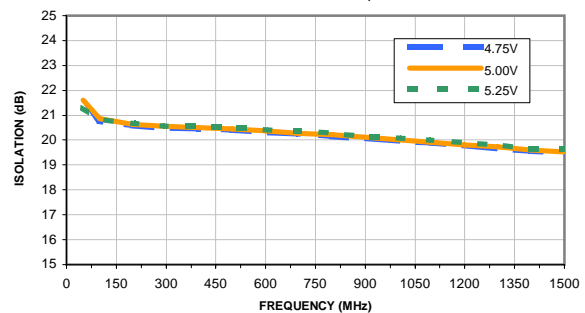

Typical Performance Curves

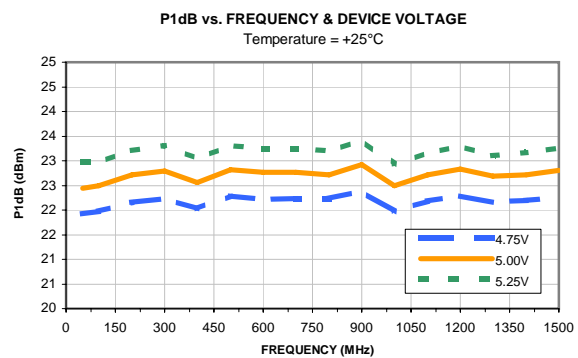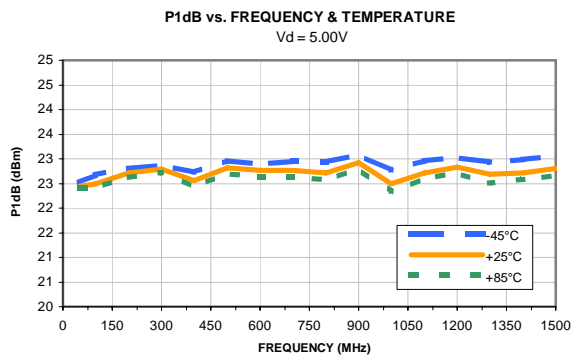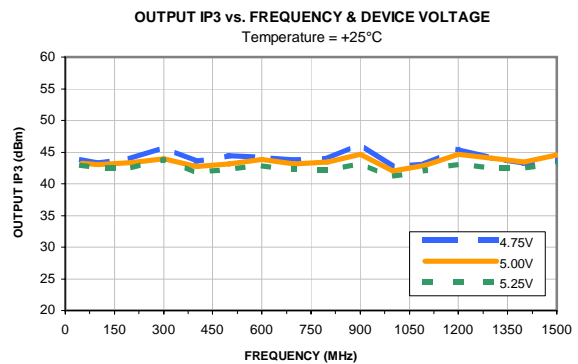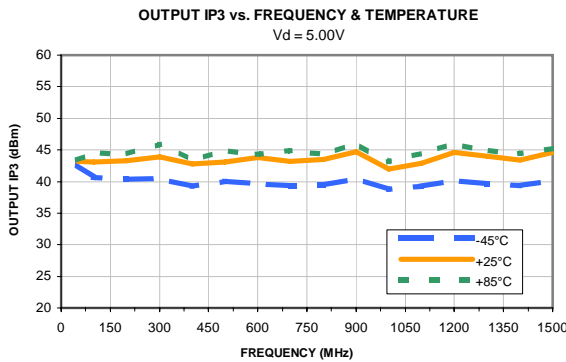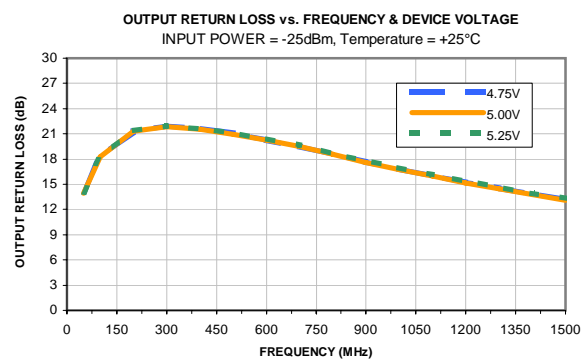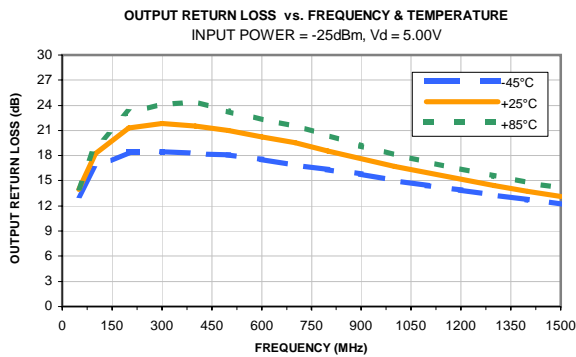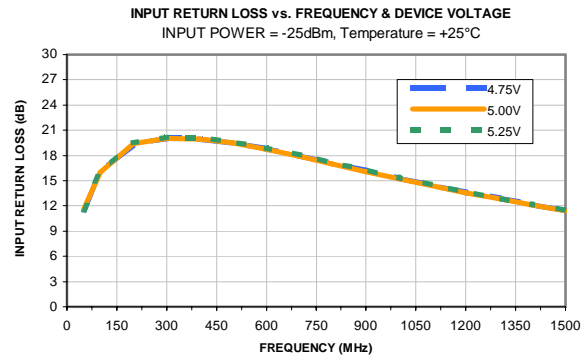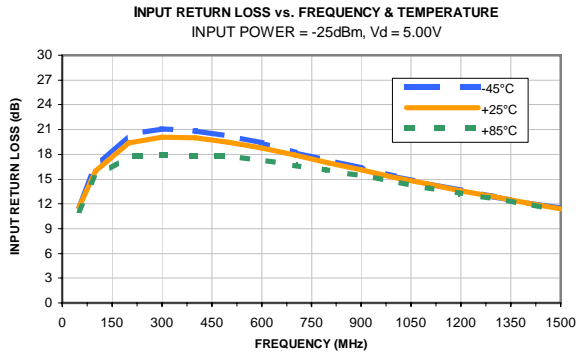

Typical Performance Curves

