Typical Performance Curves Per Channel

Test Condition: $T_{MOUNTING\ BASE}$ = +25°C, V_{DS} = 65V, 50Ω SYSTEM

Power Gain (dB) and Drain Efficiency (%) Per Channel at P_{1dB} Compression

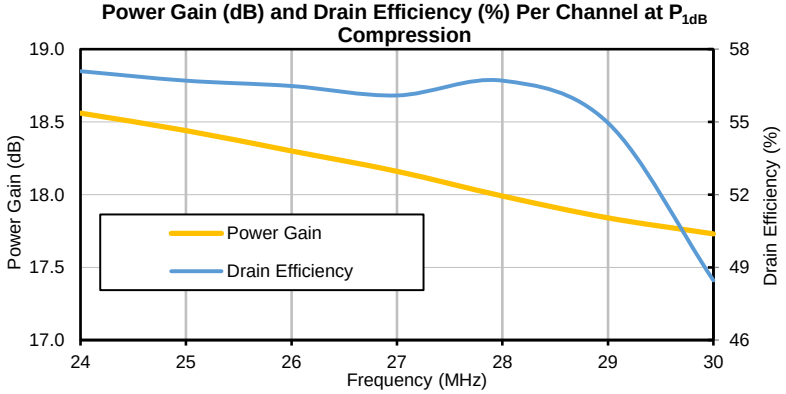

P_{OUT} (dBm) at P_{1dB} Compression Per Channel

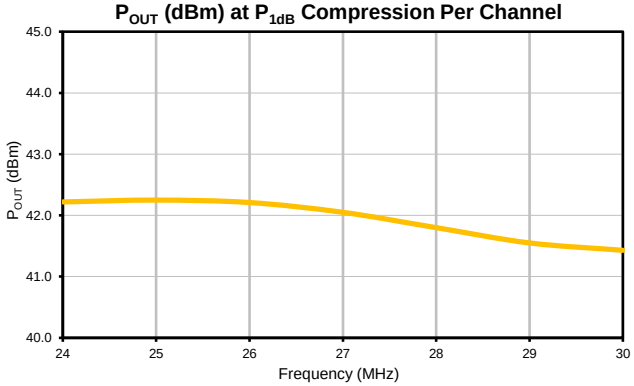

Input VSWR (:1) Per Channel at P_{1dB} Compression

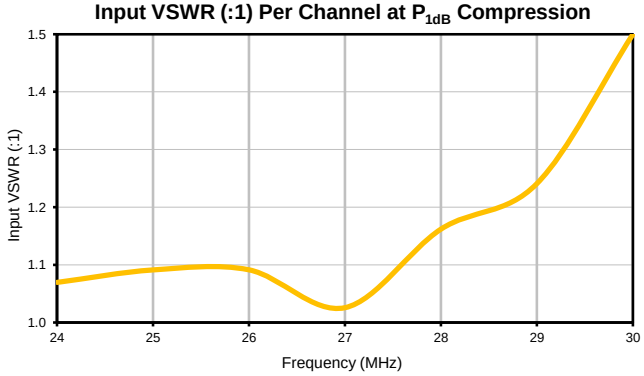

Power Gain (dB) and Drain Efficiency (%) Per Channel at P_{3dB} Compression

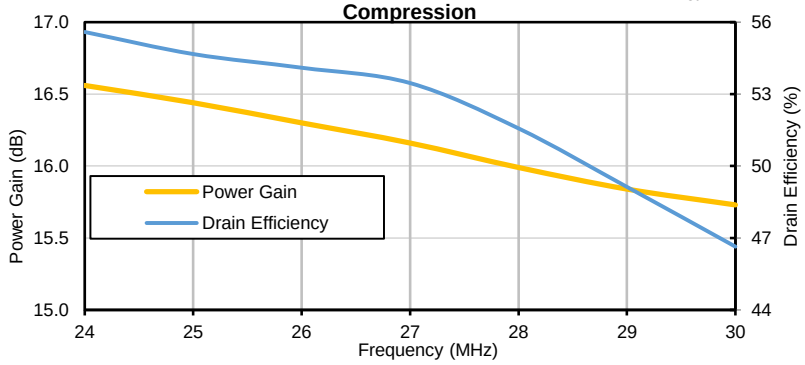

P_{OUT} (dBm) at P_{3dB} Compression Per Channel

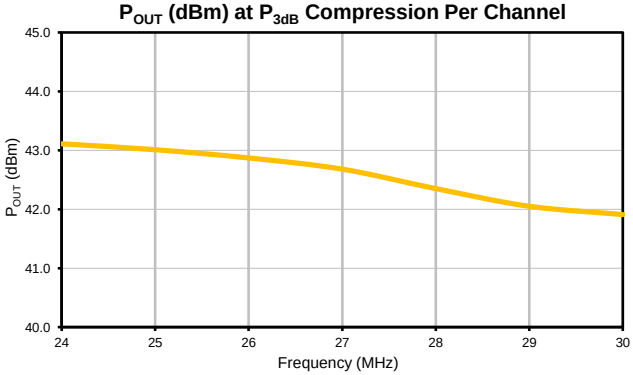
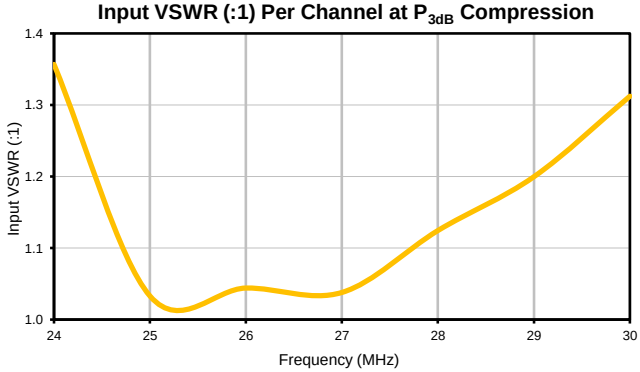
Input VSWR (:1) Per Channel at P_{3dB} Compression