
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152909	NEW RELEASE	11/09/15	ITG	ZL

SUGGESTED MOUNTING CONFIGURATION FOR MT1817 CASE STYLE, "14SW05" PIN CODE

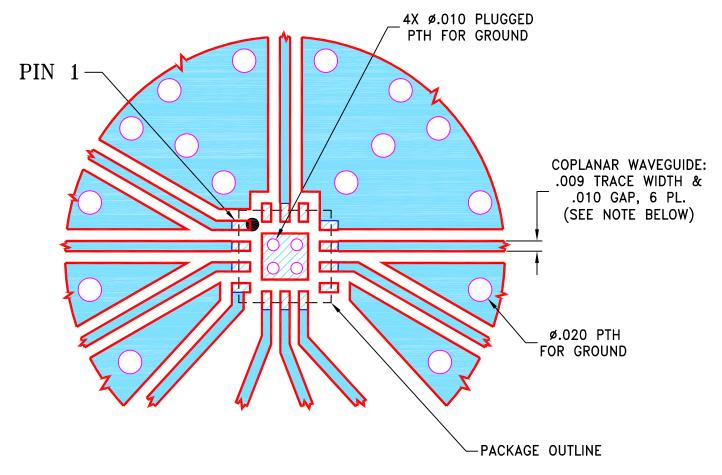

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS				. ~		• 4 R			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	11/09/15	Mini-Circuits® 13 Neptune Avenu				nue			
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	11/09/15	Brooklyn NI 11235					ຂ ວວ		
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	ZL	11/09/15								
FRACTIONS ±				PL.	PL, 14SW05, 75, MT1817, TB-723					2-5-F+	
☐ Mini-Circuits ®					,	,		,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	CODE IDENT	DRAWING		-PL-4	60	REV:	OR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					98PL460	SCALE:	12:1	SHEET:	1	OF	1
ASHEETA1.DWG REV:A DATE:01/12/95			•	701 L400	12.1			T	Or	T	