



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M166583	NEW RELEASE	03/28/18	ITG	ZL
A	ECO-016514	CORRECTED TYPO	01/19/23	ITG	TN

SUGGESTED MOUNTING CONFIGURATION  
FOR TT1224-2 CASE STYLE, "06BT03" PIN CODE

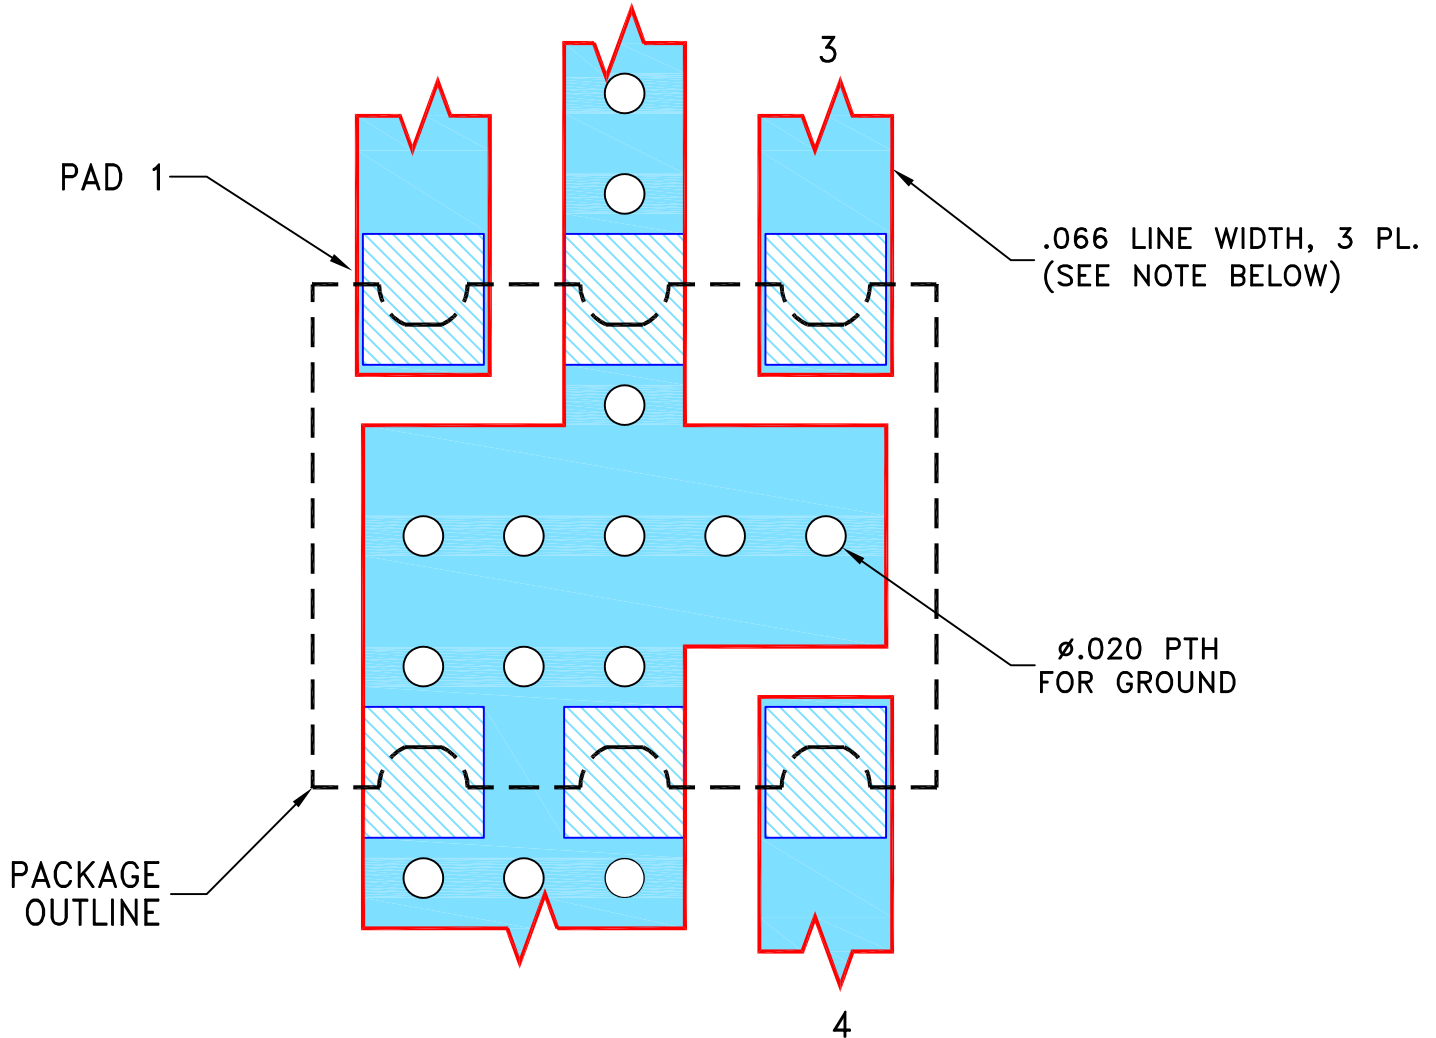


NOTES:

1. LINE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS  $.030 \pm .002$ ".  
COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS LINE WIDTH MAY NEED TO BE MODIFIED.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:  
2 PL DECIMALS  $\pm$   
3 PL DECIMALS  $\pm$  .005  
ANGLES  $\pm$   
FRACTIONS  $\pm$

	INITIALS	DATE
DRAWN	ITG	03/19/18
CHECKED	GF	03/28/18
APPROVED	ZL	03/28/18



Mini-Circuits®

13 Neptune Avenue  
Brooklyn NY 11235

PL, 06BT03, TT1224-2, TB-907+

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-577	REV: A
FILE: 98PL577	SCALE: 10:1	SHEET: 1 OF 1	

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.