
THIRD ANGLE PROJECTION ------

	REVISIONS												
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH								
OR	ECO-018141	NEW RELEASE	06/15/23	NP	CM								

SUGGESTED MOUNTING CONFIGURATION FOR DG3006 CASE STYLE

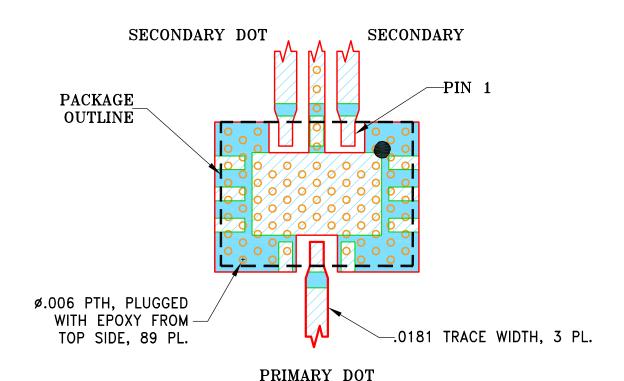

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4003C WITH DIELECTRIC THICKNESS .008"; COPPER: 1 OZ. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

ASHEETA1.DWG REV:A



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

DATE:01/12/95

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE			• 4 ®				
	DIMENSIONS ARE IN INCHES	DRAWN	NP	06/15/23	1	\pm Mını	ı–Cır	cuits	13 Neptur	ne Avenue	
2 PL 3 PL	TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	06/15/23	Mini-Circuits® 13 N					yn NY 11235	
	3 PL DECIMALS ± .005	APPROVED	СМ	06/15/23	1						
	ANGLES ± FRACTIONS ±				l PI	DG300	6 TR-	MTX2-1	33/1	3/183C+	
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY				PL, DG3006, TB-MTX2-133/183C+							
				SIZE	CODE IDENT	DRAWING NO:			REV:		
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					A	15542		98-PL-7	754	OR	
						ı					

FILE: 98PL754

SCALE:

SHEET:

1 OF 1

12:1