
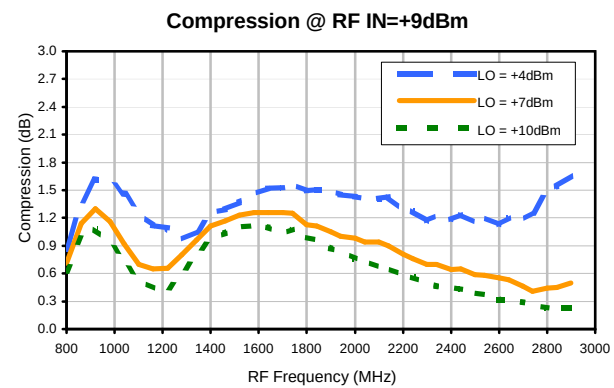
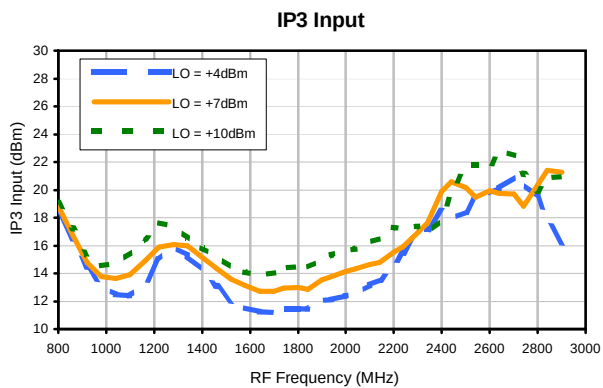
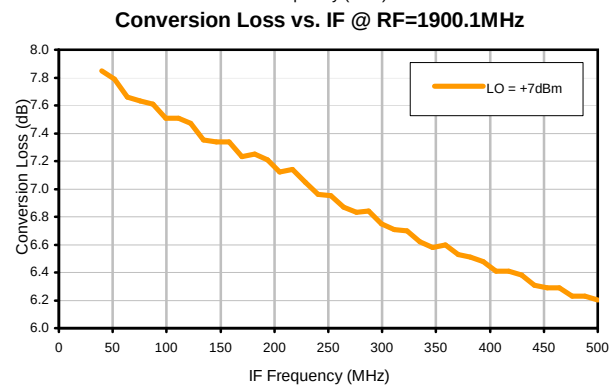
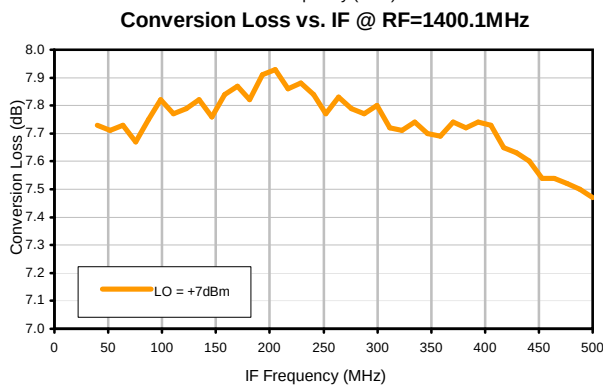
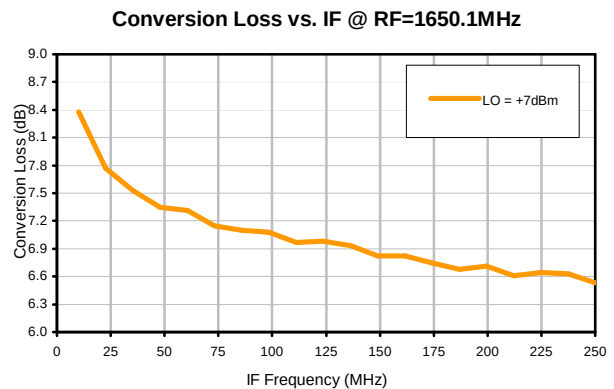
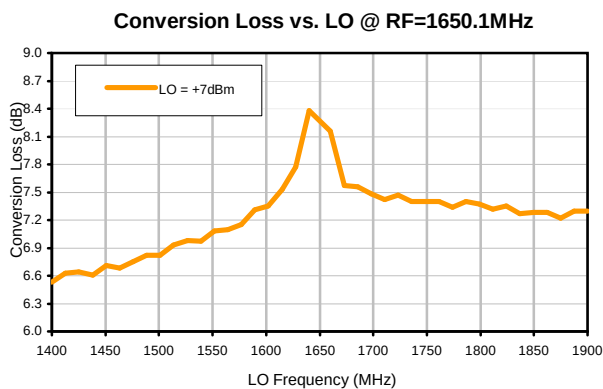


Frequency Mixer

TUF-11AMH


Typical Performance Curves

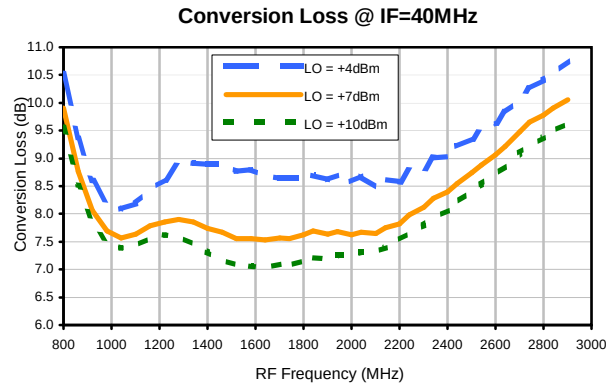


REV. X2
TUF-11AMH
100818
Page 1 of 3

Typical Performance Curves


LO-RF Isolation

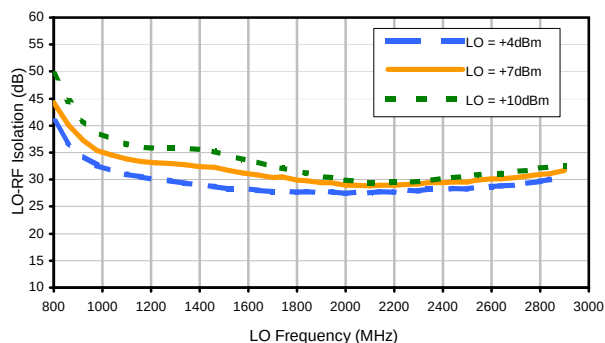


LO-IF Isolation

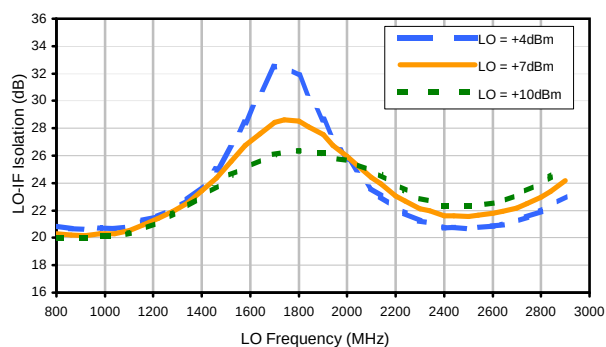


RF-IF Isolation

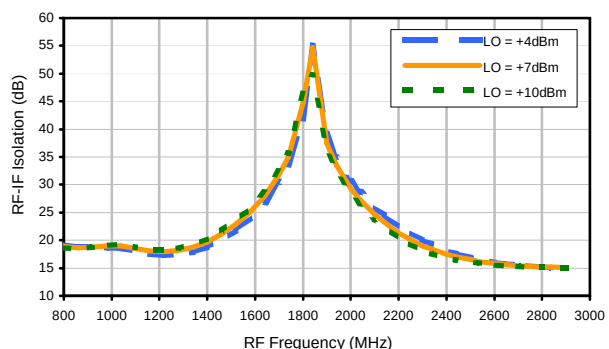


RF VSWR

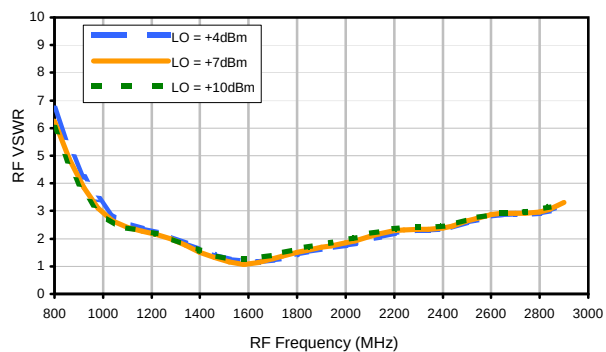

LO VSWR

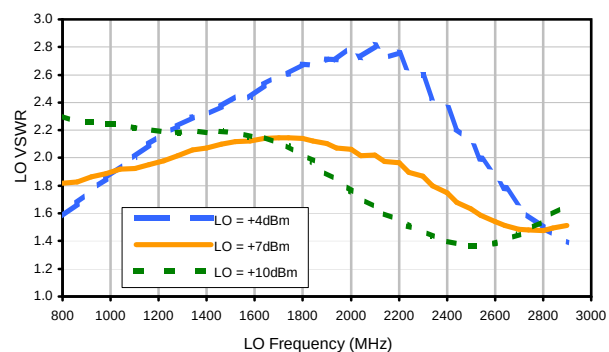

IF VSWR

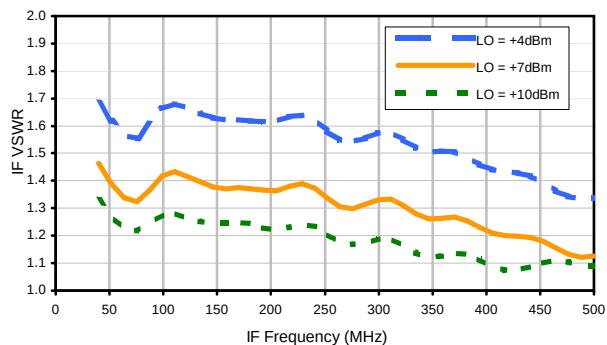

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	11	30	31	62	51	61	34	55	71	79
1	-	21	+0	39	17	50	60	63	58	67	61	80
2	>100	52	36	42	37	52	53	70	76	71	49	69
3	>100	58	42	48	32	65	47	66	69	74	68	67
4	>100	79	59	75	46	55	59	61	58	75	85	72
5	>100	79	82	88	56	60	43	75	52	77	76	87
6	>100	88	90	93	74	72	54	84	67	70	66	82
7	>100	85	90	94	96	84	67	69	63	81	69	85
8	>100	85	>96	95	>96	>96	76	82	63	74	73	78
9	>100	>96	92	>96	94	>96	>96	93	80	75	66	88
10	>100	>96	95	90	93	>96	>96	>96	91	82	68	74
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 1650.10 MHz; +4.00 dBm.
LO IN: 1690.01 MHz; +13.00 dBm
IF OUT: 39.91 MHz; -3.59 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	1	20	22	45	37	42	21	36	51	55
1	-	21	+0	37	16	43	51	52	49	47	48	56
2	>100	59	42	46	46	56	58	69	71	62	53	54
3	>100	76	59	71	49	81	57	77	76	81	75	73
4	>100	>86	81	>86	73	81	83	>86	81	>86	>86	82
5	>100	>86	>86	>86	>86	>86	85	>86	>86	>86	>86	>86
6	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
7	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
8	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 1650.10 MHz; -6.00 dBm.
LO IN: 1690.01 MHz; +13.00 dBm
IF OUT: 39.91 MHz; -13.62 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
TUF-11AMH
100818
Page 3 of 3

