



Mini-Circuits

THIN FILM SURFACE MOUNT

## Bandpass Filter

ABF-8R075G+

50 $\Omega$ 


7750 to 8400 MHz

## KEY FEATURES

- Low Passband Insertion Loss of 1.6 dB Typ.
- High Rejection of 56 dB Typ.
- Good Return Loss of 14 dB Typ.
- Small Size, 5.59 x 8.13 x 2.03 mm

## APPLICATIONS

- Phased Array SATCOM Antenna
- Aerospace and Defense Signal Conditioning
- Test and Measurement Equipment




Generic photo used for illustration purposes only

## PRODUCT OVERVIEW

Mini-Circuits' Surface Mount Thin-Film filters offer low insertion loss and high rejection realized via Thin-Film on Alumina substrate, using a sputtering process that can guarantee an enhanced Q and repeatable performance. Low pass, high pass, and bandpass surface mount thin-film designs can be realized with this technology up to 40GHz in a small form factor helping customers achieve their SWaP objectives. Using our high quality thin-film manufacturing process we can guarantee repeatability on large batches of filters.

## FUNCTIONAL DIAGRAM

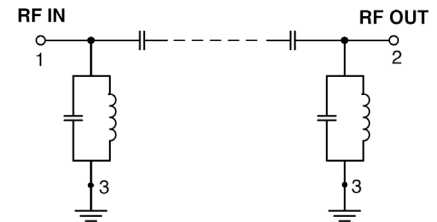ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency <sup>4</sup>	—	—	8075	—	MHz
	Insertion Loss	F1-F2	—	1.6	2.7	dB
	Return Loss	F1-F2	—	14	—	dB
Stopband, Lower	Rejection	DC-F3	40	56	—	dB
		F3-F4	20	41	—	dB
Stopband, Upper	Rejection	F5-F6	20	42	—	dB
		F6-F7	—	40	—	dB

1. Tested on Evaluation Board P/N TB-ABF-8R075G+ with feedline losses removed by normalization of S12 and S21 traces to measurement of TB thru-line.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component is not intended for use as a DC-blocking circuit element. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation  $\pm 3\%$ .


ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power <sup>6</sup>	1W Max. at 25°C

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband.

## TYPICAL FREQUENCY RESPONSE AT +25°C

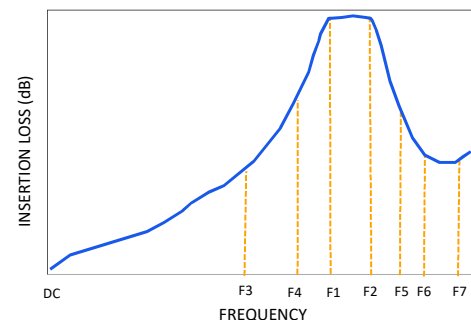

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
ECO-024318  
ABF-8R075G+  
EDU4240  
URJ  
250127

PAGE 1 OF 6





THIN FILM SURFACE MOUNT

# Bandpass Filter

**ABF-8R075G+**


Mini-Circuits

50 $\Omega$


7750 to 8400 MHz

## TYPICAL PERFORMANCE GRAPHS AT +25°C


ABF-8R075G+  
INSERTION LOSS

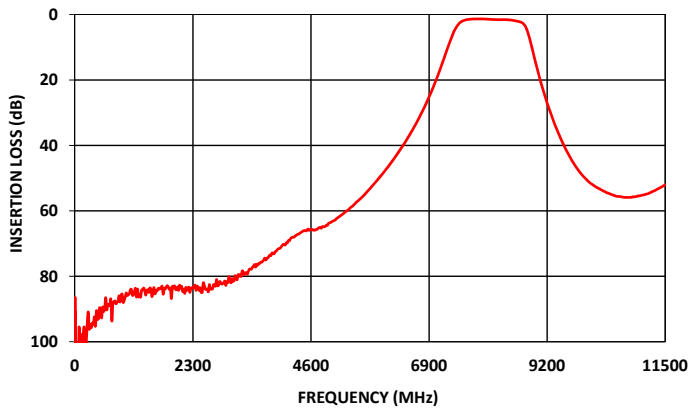


ABF-8R075G+  
INSERTION LOSS (Zoomed)

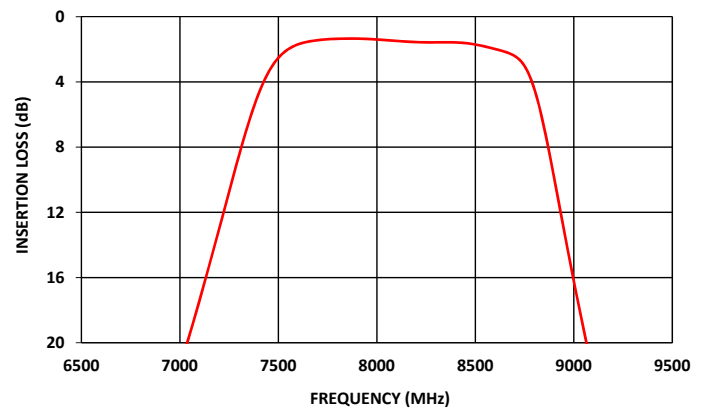

ABF-8R075G+  
RETURN LOSS

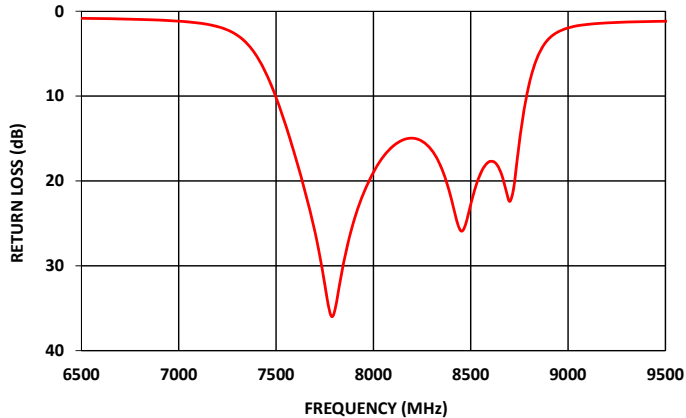

ABF-8R075G+  
GROUP DELAY

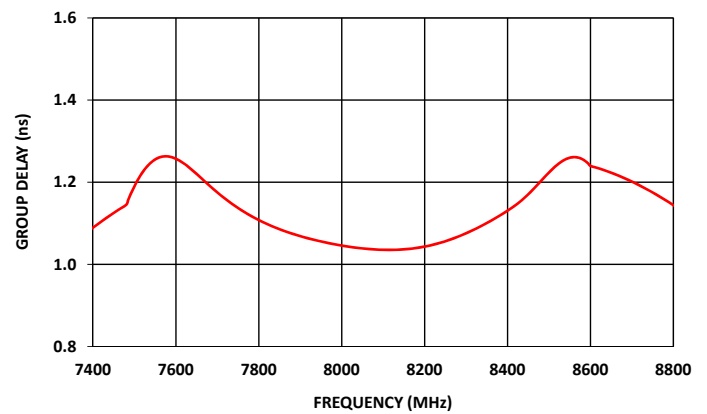





Mini-Circuits

THIN FILM SURFACE MOUNT

## Bandpass Filter

ABF-8R075G+

50Ω

7750 to 8400 MHz

## FUNCTIONAL DIAGRAM


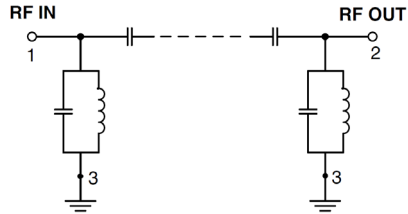


Figure 1. ABF-8R075G+ Functional Diagram


## PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-652)
NC	—	No connection, not used internally. See drawing PL-652 for connection to PCB

## CASE STYLE DRAWING

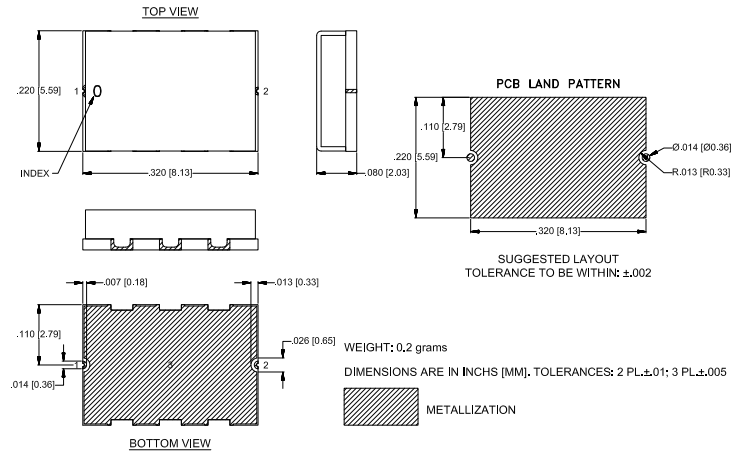

## SUGGESTED PCB LAYOUT (PL-652)

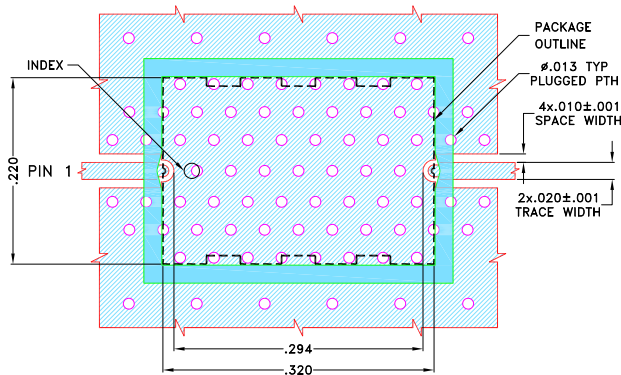

## NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.0010. COPPER: 1/2 Oz. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-652

## PRODUCT MARKING\*: ABF-8R075G

\*Marking may contain other features or characters for internal lot control.





Mini-Circuits

THIN FILM SURFACE MOUNT


# Bandpass Filter

**ABF-8R075G+**



50Ω

7750 to 8400 MHz

## RECOMMENDED PCB LAYOUT PATTERN FOR FILTER

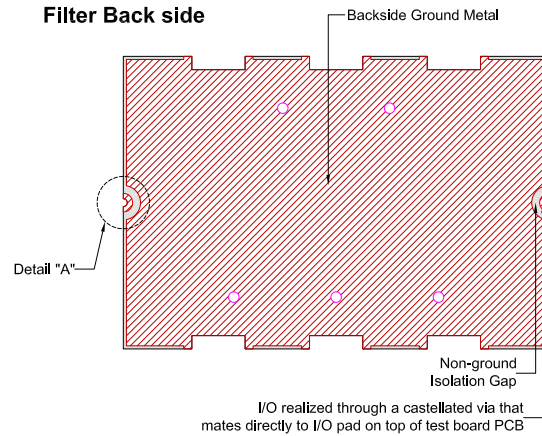

## PCB Pattern Recommendations

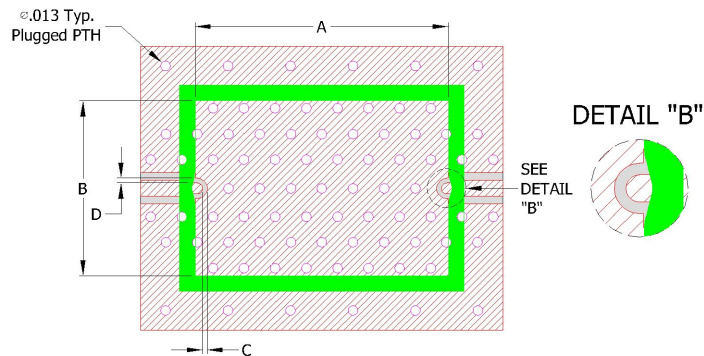Filter RF I/O Detail  
(Filter Back Side)

- 1) Customer PCB's ground pattern length (dimension A) can be similar to filter length.
- 2) Customer PCB's ground pattern width (dimension B) can be similar to filter width.
- 3) Dimensions C and D on Filter RF I/O detail and Customer PCB pattern can be closely match. The dimensions of C and D on the Customer PCB pattern can be slightly larger to account for component alignment tolerance (ground metal can be pulled back from RF I/O trace).
- 4) Recommend to use Solder mask at Customer PCB at outer area of filter pattern/ footprint with a clearance of about 1.25mil at each side. (Tighter registration tolerance required for solder mask)
- 5) Recommended to use Solder mask at I/O of Customer PCB as per above diagram (refer detail B).







## COMMENTS ON COMPONENT HANDLING AND SOLDER ATTACH

- 1) Avoid using soldering iron directly to the ceramic filter. This would lead to development of crack in the component due to thermal shock.
- 2) Vacuum pick-up tool or plastic tweezers are recommended for handling the components. Extra care should be taken not to scratch the filter or metal area.
- 3) Use 2-3 mil thickness stencil plate and screen print the solder. Refer below picture for recommended stencil pattern to get the best solder attachment.

**Stencil opening drawing**

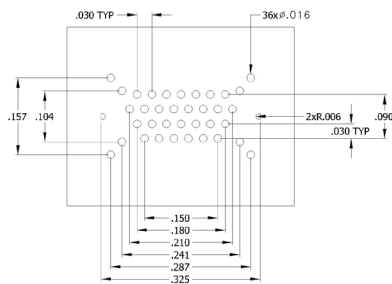

**Solder location after screen print**

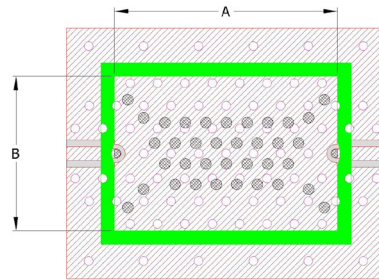

- 4) Plugged ground vias in the PWB will improve attachment consistency.
- 5) Recommended to have a similar or closer test board material and thickness (refer Mini-Circuits evaluation board for details) to minimize the CTE over the temperature range.





Mini-Circuits

THIN FILM SURFACE MOUNT

# Bandpass Filter

**ABF-8R075G+**

50Ω

7750 to 8400 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	UC2731    Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F003
Suggested Layout for PCB Design	PL-652
Evaluation Board	TB-ABF-8R075G+
	Gerber File
Environmental Rating	ENV120

## NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

