

RF Transformer

50Ω 2400 to 2500 MHz 1:4 Ratio

BLJC4-252R+



Generic photo used for illustration purposes only
CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|-----------------------------------|
| 7" | 20, 50, 100, 200, 500, 1000, 4000 |

Maximum Ratings

| | |
|-----------------------|---------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature* | -40°C to 85°C |
| Input RF Power** | 2W at 25°C |

*Refer to product storage temperature after installation. Suggestion for T&R unused product storage condition: +5-+35°C, Humidity 45-75%RH, 12 Month max. Permanent damage may occur if any of these limits are exceeded.


**Derate linearly to 1W at 85°C.

Pad Connections

| | |
|-------------------------------|-----|
| PRIMARY DOT (Unbalanced Port) | 1 |
| GND or DC FEED | 3 |
| SECONDARY DOT (Balanced) | 4 |
| SECONDARY (Balanced) | 6 |
| NO CONNECTION | 2,5 |

Outline Drawing


PCB Land Pattern

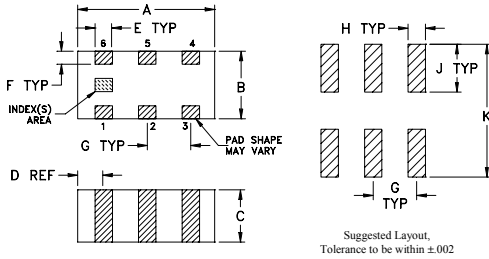

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | wt |
|------|------|------|------|------|------|------|------|------|------|-------|
| .063 | .031 | .024 | .012 | .008 | .006 | .020 | .010 | .022 | .053 | grams |
| 1.60 | 0.79 | 0.61 | 0.30 | 0.20 | 0.15 | 0.51 | 0.25 | 0.56 | 1.35 | 0.005 |

Evaluation Board MCL P/N: TB-1013+ Suggested PCB Layout (PL-559)

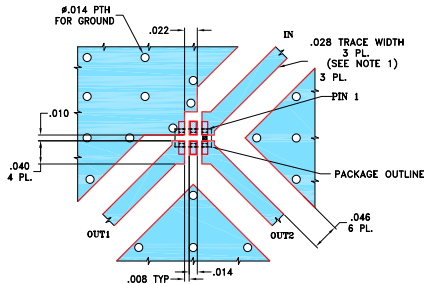

- NOTES:
- TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (TEO CORP.) WITH DIELECTRIC THICKNESS .016±.0015, COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Features

- miniature size 0603 (0.063" [1.6mm] x 0.031" [0.8mm] x 0.024" [0.6mm])
- low phase unbalance, 0.8 deg. and amplitude unbalance, 0.2 dB typ.
- low cost
- aqueous washable

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Electrical Specifications at 25°C

| Parameter | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|-----------------------|-----------------|------|------|------|--------|
| Impedance Ratio | | | 4 | | |
| Frequency Range | | 2400 | — | 2500 | MHz |
| Insertion Loss* | 2400 - 2500 | — | 0.9 | 1.5 | dB |
| Amplitude Unbalance | 2400 - 2500 | — | 0.2 | 2 | dB |
| Phase Unbalance† | 2400 - 2500 | — | 0.8 | 10 | Degree |
| Unbalance Return Loss | 2400 - 2500 | 9.5 | 24 | — | dB |




* Tested on Evaluation Board TB-1013+

† Relative to 180°


Typical Performance Data at 25°C**

| FREQUENCY (GHz) | INSERTION LOSS (dB) | INPUT R. LOSS (dB) | AMPLITUDE UNBALANCE (dB) | PHASE UNBALANCE (Deg.) |
|-----------------|---------------------|--------------------|--------------------------|------------------------|
| 2.40 | 0.97 | 20.36 | 0.09 | 1.02 |
| 2.41 | 0.95 | 21.08 | 0.12 | 0.94 |
| 2.42 | 0.94 | 21.77 | 0.15 | 0.85 |
| 2.43 | 0.93 | 22.39 | 0.18 | 0.78 |
| 2.44 | 0.91 | 22.91 | 0.21 | 0.65 |
| 2.45 | 0.90 | 23.32 | 0.24 | 0.52 |
| 2.46 | 0.89 | 23.46 | 0.27 | 0.46 |
| 2.47 | 0.88 | 23.39 | 0.30 | 0.32 |
| 2.48 | 0.88 | 23.05 | 0.32 | 0.21 |
| 2.49 | 0.87 | 22.54 | 0.35 | 0.08 |
| 2.50 | 0.87 | 21.97 | 0.38 | 0.12 |

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

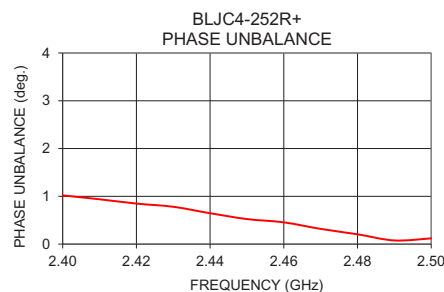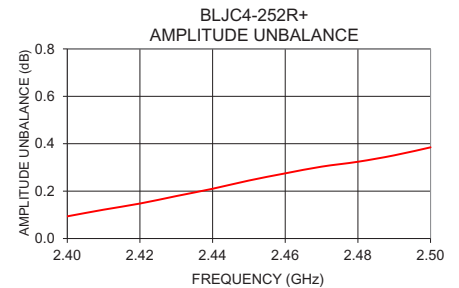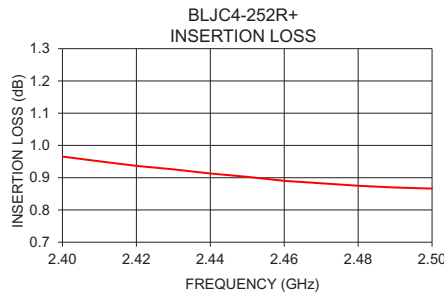

Configuration J

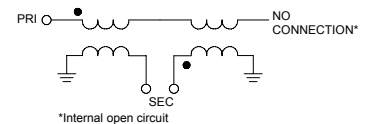

*Internal open circuit

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

