



Mini-Circuits

CERAMIC RESONATOR SURFACE MOUNT

Bandpass Filter

CBP3-1490CB+

50Ω

1442 to 1538 MHz

KEY FEATURES

- Good Insertion Loss, 1.0 dB Typ.
- High Rejection, 70 dB Typ.
- Fast Roll-off on the Upper Side



Generic photo used for illustration purposes only


APPLICATIONS

- 5G Base Station

PRODUCT OVERVIEW

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Excellent repeatability across units is achieved through precise tuning and process control.

FUNCTIONAL DIAGRAM

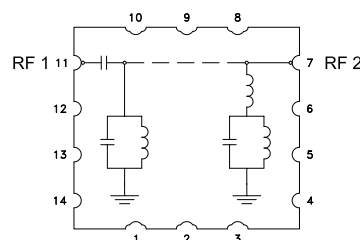ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	—	1490	—	MHz
	Insertion Loss	F1-F2	1442 - 1538	—	1	1.6	dB
	Return Loss	F1-F2	1442 - 1538	10	14	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 850	60	70	—	dB
		F3-F4	850 - 1270	20	28	—	
Stop Band, Upper	Rejection	F5-F6	1645 - 1850	20	27	—	dB
		F6-F7	1850 - 2200	35	45	—	

1. Tested in Evaluation Board P/N TB-CBP3-1490CB+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁵	12 W at 25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 2 W at +85°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

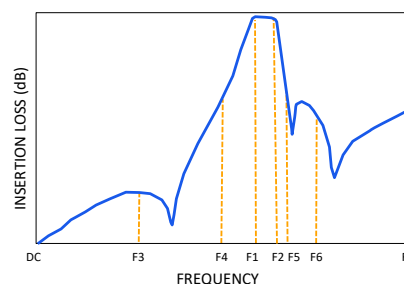

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. OR
 ECO-026012
 EDU5075
 CBP3-1490CB+
 URJ
 250626

PAGE 1 OF 4



Mini-Circuits

CERAMIC RESONATOR SURFACE MOUNT





Bandpass Filter

CBP3-1490CB+

50Ω

1442 to 1538 MHz

TYPICAL PERFORMANCE GRAPHS

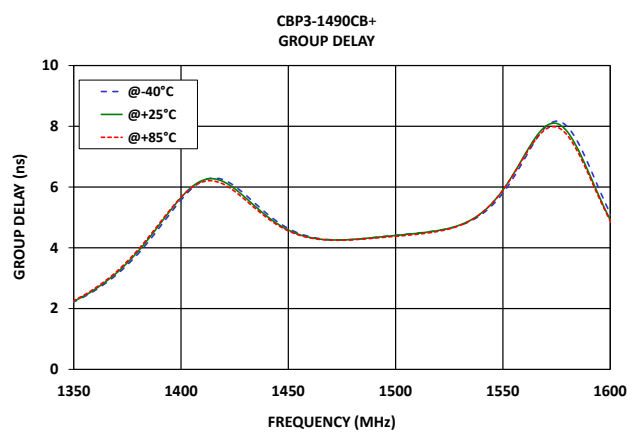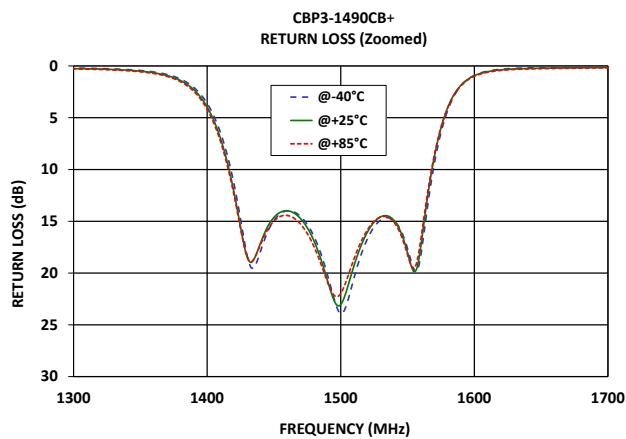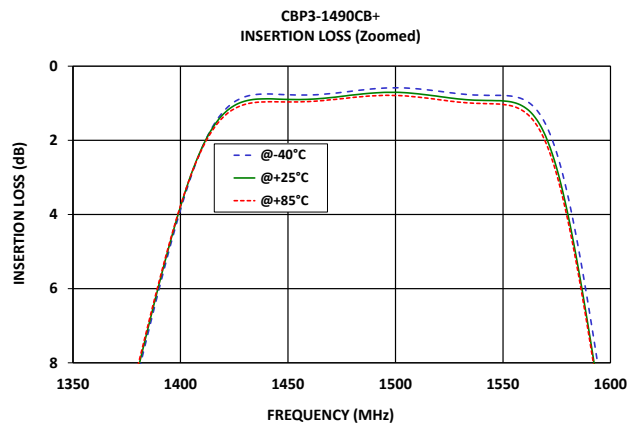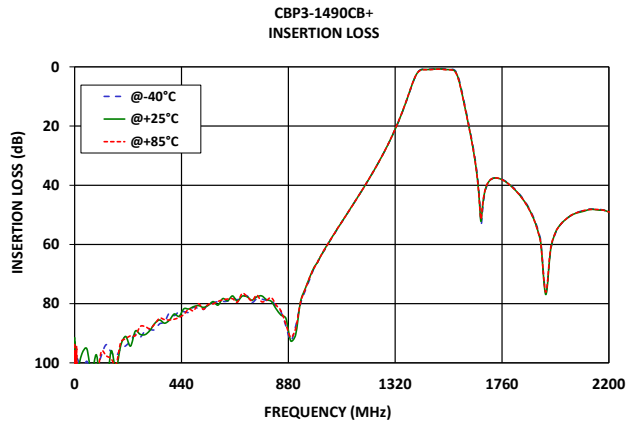



Mini-Circuits

CERAMIC RESONATOR SURFACE MOUNT

Bandpass Filter

CBP3-1490CB+

50Ω

1442 to 1538 MHz

FUNCTIONAL DIAGRAM

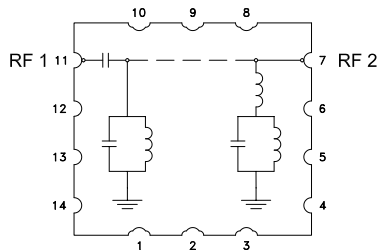



Figure 1. CBP3-1490CB+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1 ²	11	Connects to RF Input Port
RF2 ²	7	Connects to RF Output Port
GROUND	1-6, 8-10, 12-14	Connects to Ground on PCB, (See drawing PL-818)
NC	-	No connection, not used internally. See drawing PL-818 for connection to PCB

SUGGESTED PCB LAYOUT (PL-818)

SUGGESTED MOUNTING CONFIGURATION FOR BAT3582-1 CASE STYLE

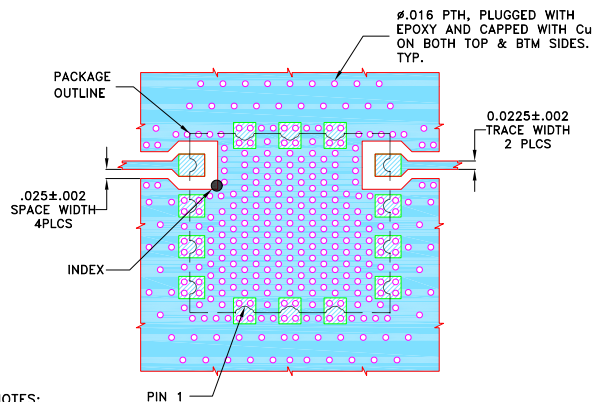


NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.001; COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-818

CASE STYLE DRAWING

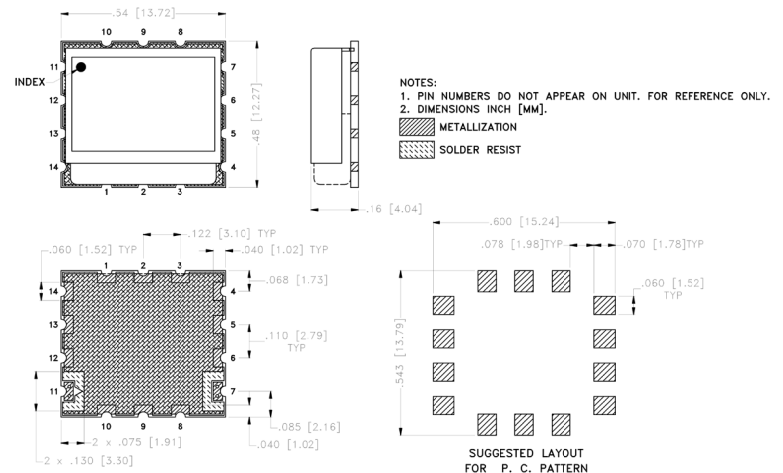

Weight: 1.5 grams

Dimensions are in inches (mm). Tolerances: 2Pl. ± .015; 3Pl. ± .003

PRODUCT MARKING*: CBP3-1490CB

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

CERAMIC RESONATOR SURFACE MOUNT

Bandpass Filter

CBP3-1490CB+

50Ω

1442 to 1538 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	BAT3582-1 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F014
Suggested Layout for PCB Design	PL-818
Evaluation Board	TB-CBP3-1490CB+
	Gerber File
Environmental Rating	ENV54

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

