

Surface Mount

Bandpass Filter

EBPF-368-1+

50Ω 225 to 512 MHz

Features

- Miniature shielded package
- Low insertion loss
- High rejection

CASE STYLE: HE1354


Electrical Specifications

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	F1-F2	225 - 512	—	1.2	2.5	dB
	Return Loss	F1-F2	225 - 512	12	—	—	dB
Stop Band, Lower	Rejection	F3-F4	30 - 108	25	30	—	dB
Stop Band, Upper	Rejection	F5-F6	620 - 1000	20	30	—	dB
		F6-F7	1000 - 2000	—	20	—	dB

Applications

- Defense/Military
- Military Radio Communications

Functional Schematic




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5 W

Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. OR
ECO-002850
EBPF-368-1+
EDU3862
URJ
200703
Page 1 of 2

Pad Connections

INPUT	1
OUTPUT	6
GROUND	2,5
NOT USED	3,4


Demo Board MCL P/N: TB-XXXX+
Suggested PCB Layout (PL-680)

SUGGESTED MOUNTING CONFIGURATION FOR
HE1354 CASE STYLE

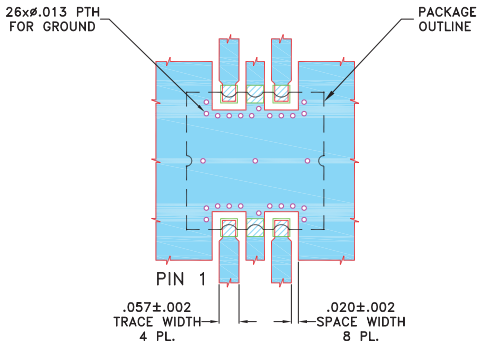


- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

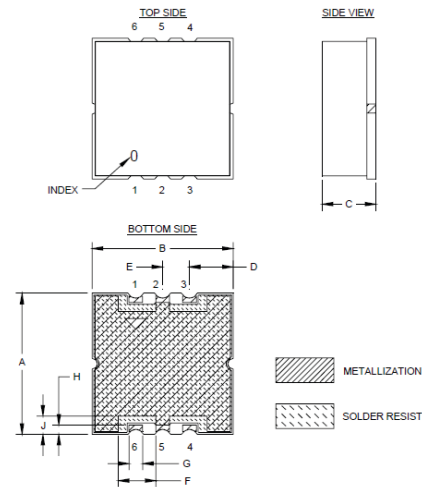

PCB Land Pattern



Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K
.394	.394	.150	.122	.075	.098	.038	.026	.051	.038
10.01	10.01	3.81	3.10	1.90	2.49	0.97	0.66	1.29	0.97
L	M								Wt.
.046	.434								grams
1.17	11.02								0.7

Note: Please refer to case style drawing for details

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp