

50Ω DC to 40 GHz

The Big Deal

- Dual mechanical SP4T switch
- Excellent performance to 40 GHz
- High reliability, 2 million switch cycles
- 5W power rating (cold switching)

Typical Applications

- 5G node / device testing
- Automated test equipment
- Fail-safe / redundancy switching



Case Style: MR2616

Software Package

RoHS Compliant
See our web site for RoHS Compliance methodologies and qualifications

Product Overview

Mini-Circuits' RC-2SP4T-40 comprises a pair of independently controlled, electro-mechanical SP4T switches. Each switch operates over an extremely wide bandwidth, from DC to 40 GHz with high isolation and low insertion loss. The absorptive switches are of a fail-safe and break-before-make-configuration, with a minimum lifetime of 2 million switching cycles per switch position, when used within the noted specifications.

The switch box is constructed in a compact, rugged metal case (5.5 x 6.0 x 2.25") with 10 2.92 mm (f) RF connectors on the front panel. The switches are controlled via USB or Ethernet, allowing control directly from a PC, or remotely over a network. Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32-bit and 64-bit systems).

Key Features

| Feature | Advantages |
|---------------------------------|--|
| Dual mechanical SP4T switches | Mechanical absorptive switches provide high reliability, repeatable high performance and internal terminations of input signals on the disconnected paths |
| Operation from DC to 40 GHz | Supports a wide range of RF test and signal routing applications, including 2G, 3G, 4G and 5G, with a single device. |
| Break-before-make configuration | Prevents a momentary connection of the old and new signal paths, reducing the inconsistent transient effects that could otherwise be observed during switching |
| USB & Ethernet control | USB HID and Ethernet (HTTP / Telnet) interfaces provide easy compatibility with a wide range of software setups and programming environments |
| Full software support | User friendly Windows GUI (graphical user interface) allows manual control straight out of the box, while the comprehensive API (application programming interface) with examples and instructions allows easy automation in most programming environments |

Electrical Specifications at 25°C

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--|----------------------------------|------|------|------|----------------|
| Frequency Range | | DC | | 40 | GHz |
| Insertion Loss | DC - 6 GHz | — | — | 0.20 | dB |
| | 6 - 18 GHz | — | — | 0.50 | |
| | 18 - 26.5 GHz | — | — | 0.70 | |
| | 26.5 - 40 GHz | — | — | 1.10 | |
| Isolation | DC - 6 GHz | 70 | — | — | dB |
| | 6 - 18 GHz | 60 | — | — | |
| | 18 - 26.5 GHz | 55 | — | — | |
| | 26.5 - 40 GHz | 50 | — | — | |
| VSWR | DC - 6 GHz | — | — | 1.30 | :1 |
| | 6 - 18 GHz | — | — | 1.50 | |
| | 18 - 26.5 GHz | — | — | 1.70 | |
| | 26.5 - 40 GHz | — | — | 2.20 | |
| Switching Time | — | — | 25 | — | ms |
| RF Input Power (Cold Switching) ¹ | DC - 18 GHz | — | — | 20 | W |
| | 18 - 26.5 GHz | — | — | 10 | |
| | 26.5 - 40 GHz | — | — | 5 | |
| Switch Lifetime (per Switch) | 100mW hot switching ² | 2 | — | — | million cycles |
| | 1W hot switching | — | 1 | — | |
| Rated Voltage | 24V _{DC} input | 23 | 24 | 25 | V |
| | USB port | — | 5 | — | |
| Rated Current (24V DC Input) | Both switches in state 1-4 | — | 440 | — | mA |
| | Both switches in state 0 | — | 90 | 120 | |
| Rated Current (USB) | | — | 10 | 20 | mA |

¹ Maximum power for any connected through path as stated; maximum power into any internal termination is 1W per port, 3W total per switch


² Hot switching powers above this level will degrade the switch lifetime

Absolute Maximum Ratings

| | |
|-----------------------|---------------|
| Operating Temperature | 0°C to 40°C |
| Storage Temperature | -15°C to 85°C |
| Supply Voltage | 26V |

Switching Configuration:





- Normally open (all port disconnected)
- Absorptive (internal terminations on ports J1-J4)

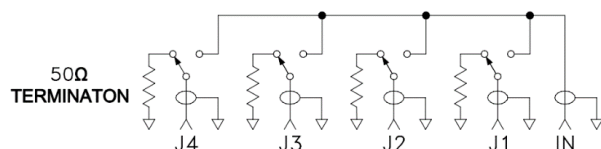


Connections

| Port Name | Connector Type |
|---------------------------|---------------------------------|
| RF Switch A (Com,1,2,3&4) | 2.92mm female |
| RF Switch B (Com,1,2,3&4) | 2.92mm female |
| USB | USB type-B |
| Ethernet / LAN | RJ45 |
| 24V _{DC} Input | 2.1mm center positive DC socket |

Typical Performance Data (per Switch)

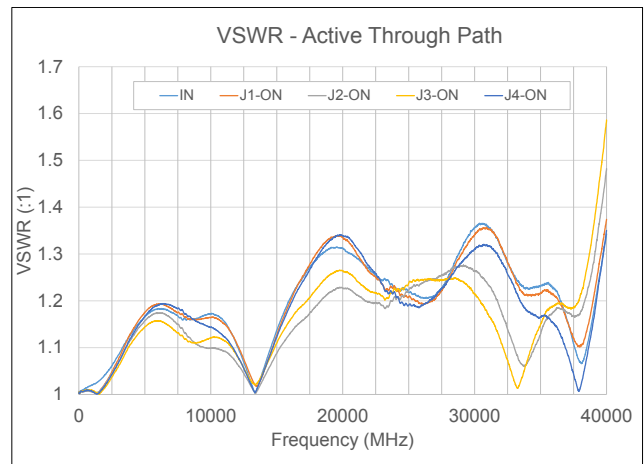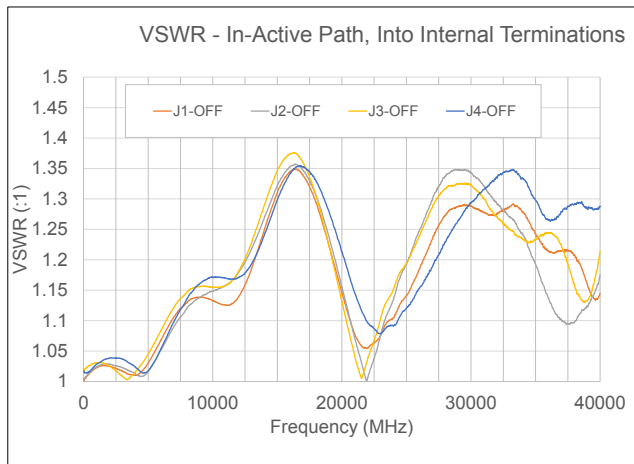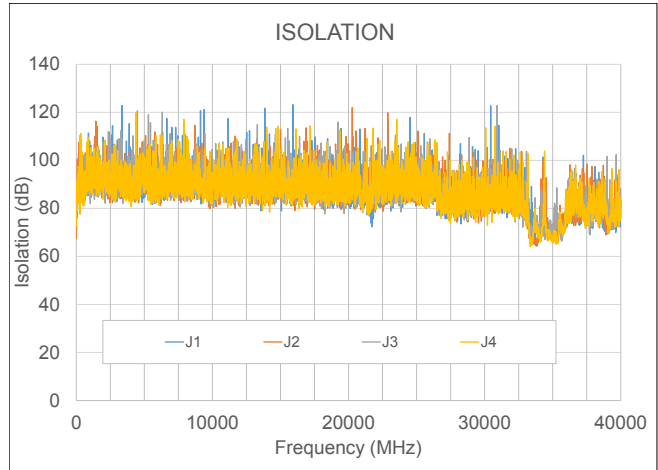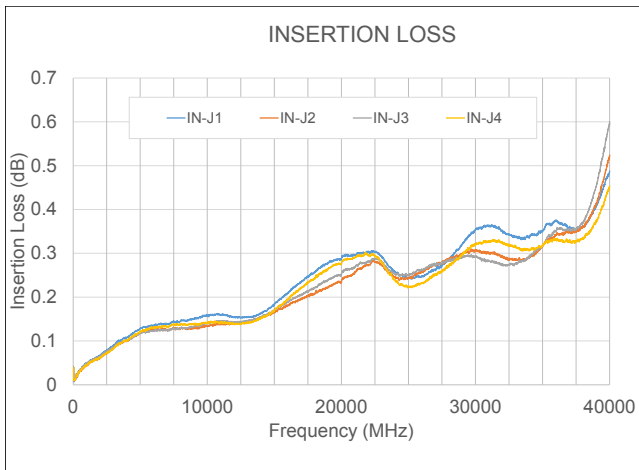

Outline Drawing (MR2616)

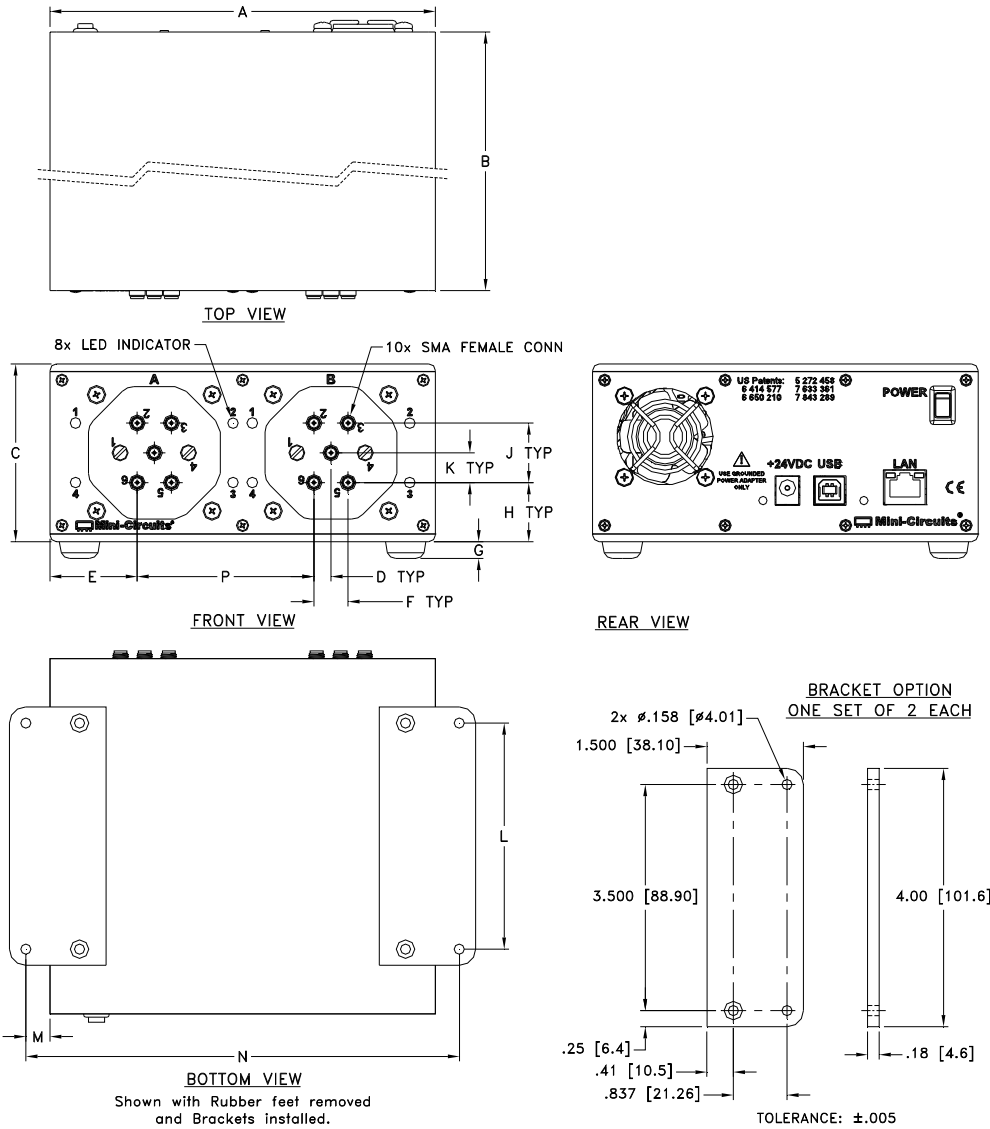

INSTRUCTION FOR MOUNTING BRACKETS:
TOOL REQUIRED: PHILLIPS HEAD SCREW DRIVER

STEP 1: REMOVE RUBBER FEET FROM THE BOTTOM OF THE UNIT,
DO NOT DISCARD THE FASTENERS.

STEP 2: MOUNT THE BRACKETS WITH THE FASTENERS REMOVED
IN STEP 1, USING THE COUNTER BORE HOLES IN THE BRACKET.

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | wt |
|-------|-------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|
| 6.00 | 5.50 | 2.75 | 0.27 | 1.36 | 0.53 | 0.26 | 0.92 | 0.92 | 0.46 | 3.50 | 0.38 | 6.750 | 2.750 | grams |
| 152.4 | 139.7 | 69.9 | 6.9 | 34.5 | 13.5 | 6.6 | 23.4 | 23.4 | 11.7 | 88.9 | 9.5 | 171.5 | 69.9 | 1290 |

Software Specifications

Software & Documentation Download:

- Mini-Circuits' full software and support package including user guide, Windows GUI, DLL files, programming manual and examples can be downloaded free of charge from <https://www.minicircuits.com/softwaredownload/rfswitchcontroller.html>
- Please contact testsolutions@minicircuits.com for support

Minimum System Requirements:

| Parameter | Requirements | |
|---------------------|-------------------------------------|--|
| Interface | USB HID & Ethernet (HTTP & Telnet) | |
| System Requirements | GUI | Windows 98 or later |
| | USB API DLL | Windows 98 or later and programming environment with ActiveX or .NET support |
| | USB Direct Programming | Linux, Windows 98 or later |
| | Ethernet | Windows, Linux or Mac computer with a network port and Ethernet TCP/IP support |
| Hardware | Pentium II or later with 256 MB RAM | |

Application Programming Interface (API)

Ethernet Support:

- Simple ASCII / SCPI command set for attenuator control
- Communication via HTTP or Telnet
- Supported by most common programming environments

USB Support (Windows):

- ActiveX COM DLL file for creation of 32-bit programs
- .NET library DLL file for creation of 32 / 64-bit programs
- Supported by most common programming environments (refer to application note AN-49-001 for summary of supported environments)


USB Support (Linux):

- Direct USB programming using a series of USB interrupt codes


Full programming instructions and examples available for a wide range of programming environments / languages.

Graphical User Interface (GUI) for Windows - Key Features

- Connect via USB or Ethernet
- Run GUI in “demo mode” to evaluate software without a hardware connection

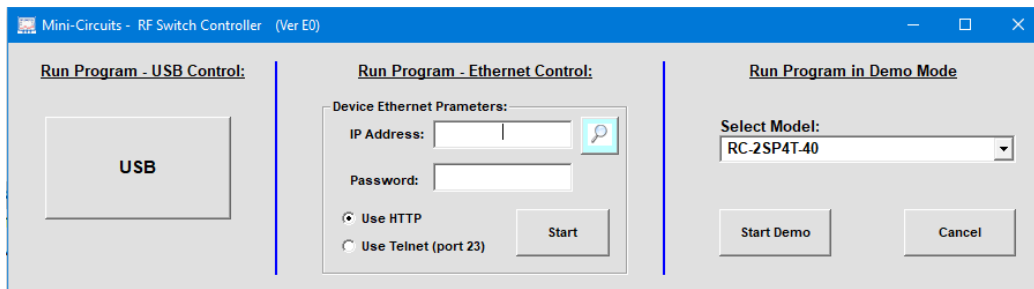

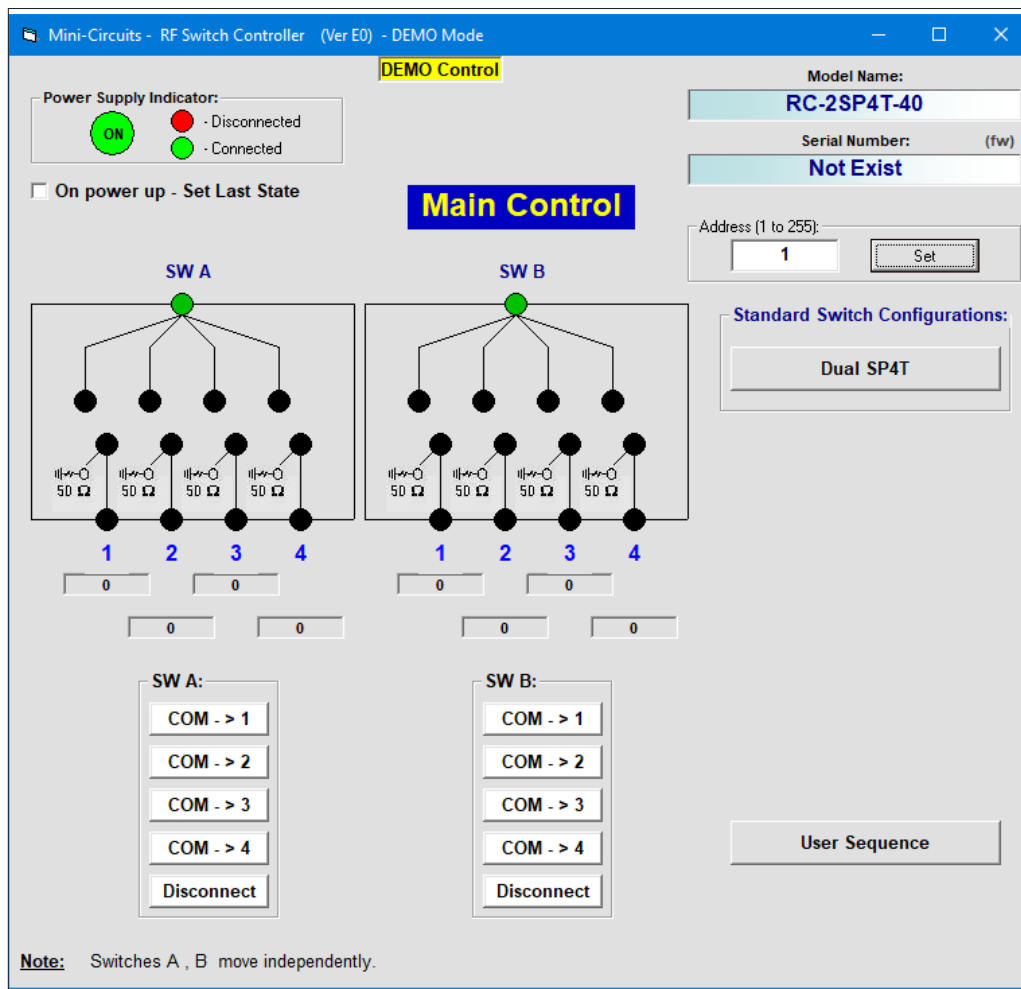


- View and set switch states at the click of a button
- Configure and run timed switching sequences
- Set start-up switch state
- Configure Ethernet IP settings








Ordering Information

Please contact Mini-Circuits' Test Solutions department for price and availability:
testsolutions@minicircuits.com

| Model | Description |
|-------------|---|
| RC-2SP4T-40 | USB & Ethernet controlled dual SP4T switch matrix |

| Included Accessories | Part No. | Description |
|---|---------------|--|
|  | AC/DC-24-3W1 | AC/DC 24V _{DC} Grounded Power Adaptor. Operating temperature: 0°C to +40°C, I _{Max} =2.5A |
|  | CBL-3W1-XX | AC Power Cord (Select one power cord from below with each Switch Matrix box) |
|  | USB-CBL-AB-3+ | 2.7 ft (0.8 m) USB Cable: USB type A(Male) to USB type B(Male) |

| AC Power Cords ⁵ | Part No. | Description |
|---|------------|------------------------------------|
|  | CBL-3W1-US | Power Cord for United States |
|  | CBL-3W1-EU | Power Cord for Europe |
|  | CBL-3W1-UK | Power Cord for United Kingdom |
|  | CBL-3W1-AU | Power Cord for Australia and China |
|  | CBL-3W1-IL | Power Cord for Israel |

⁵ If you need a Power cord for a country not listed please contact testsolutions@minicircuits.com

| Optional Accessories | Description |
|----------------------|--|
| USB-CBL-3+ (spare) | 2.7 ft (0.8 m) USB Cable: USB type A(Male) to USB type B(Male) |
| USB-CBL-7+ | 6.8 ft (2.1 m) USB Cable: USB type A(Male) to USB type B(Male) |
| USB-CBL-11+ | 11 ft (3.4 m) USB Cable: USB type A(Male) to USB type B(Male) |
| CBL-RJ45-MM-5+ | 5 ft (1.5 m) Ethernet cable: RJ45(Male) to RJ45(Male) Cat 5E cable |
| BKT-272-08+ | Bracket (One set of 2 each) |

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Alternative Models

Mini-Circuits has a number of options for larger switching systems comprising more than 2 transfer switches, or combinations of switch types. Please contact testsolutions@minicircuits.com with your requirements.



ZTM Series

The ZTM Series test platform contains 6 customizable windows on the front panel, each of which can be populated with your choice of DC-40 GHz switch components:

- Up to two SPDT reflective mechanical switches per window
- Up to two mechanical transfer switches per window
- One SP4T mechanical switch per window
- One SP6T mechanical switch per window



RCM-400 Series

The RCM-400 series modular test systems offer flexibility and fast turnaround for compact test setups. The design consists of a small, light-weight chassis with up to three open hardware windows, each of which may be outfitted with your choice of DC-40 GHz switches:

- 6 mechanical SPDT reflective or transfer switches
- 3 mechanical SP4T or SP6T switches
- Custom combinations of SPDT, SP4T, SP6T and transfer switches