



Mini-Circuits

SUSPENDED SUBSTRATE STRIPLINE COAXIAL

High Pass Filter

ZHSS-V26G+

50Ω

26 to 50 GHz

2.4mm Female

KEY FEATURES

- Insertion Loss, 1.3 dB Typ.
- High Rejection, 80 dB Typ.
- Wide Passband up to 50 GHz

APPLICATIONS

- 5G Applications
- Satellite Communication
- Military Radar


PRODUCT OVERVIEW

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss combined with wide stopband, good power handling & temperature stability, small form factor with rugged build ideal for harsh operating environments making them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultrabroadband receivers. Low pass, high pass, band pass, diplexer and multiplexer designs can be realized with this technology with passband, stopband up to 50GHz and stopband width greater than 6x cutoff frequency.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

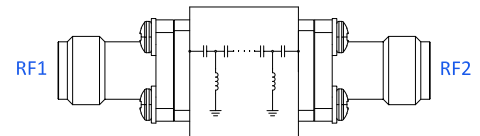

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Pass Band	Insertion Loss	F4-F5	26 - 45	—	1.3	2.5	dB
		F5-F6	45 - 50	—	1.5	—	
	Return Loss	F4-F6	26 - 50	—	9.5	—	dB
Stop Band	Rejection	DC-F1	DC - 16	60	80	—	dB
		F1-F2	16 - 18	40	60	—	
		F2-F3	18 - 20	20	40	—	


ABSOLUTE MAXIMUM RATINGS¹

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ²	1 W @ 25°C

1. Permanent damage may occur if any of these limits are exceeded.

2. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE

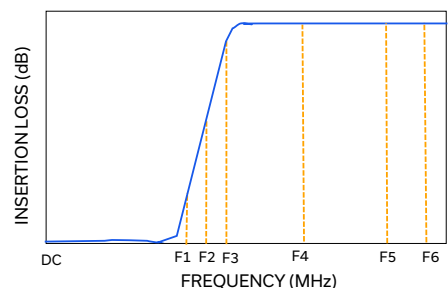

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-030019
EDU5243
ZHSS-V26G+
MCINU
260630

PAGE 1 OF 4



Mini-Circuits

SUSPENDED SUBSTRATE STRIPLINE COAXIAL

High Pass Filter





ZHSS-V26G+

50 Ω

26 to 50 GHz

2.4mm Female

TYPICAL PERFORMANCE GRAPHS

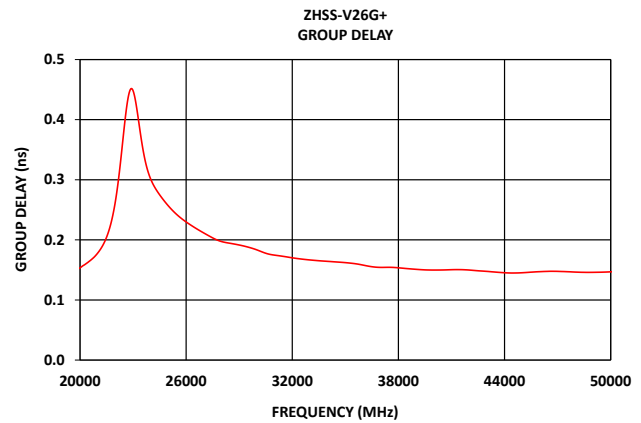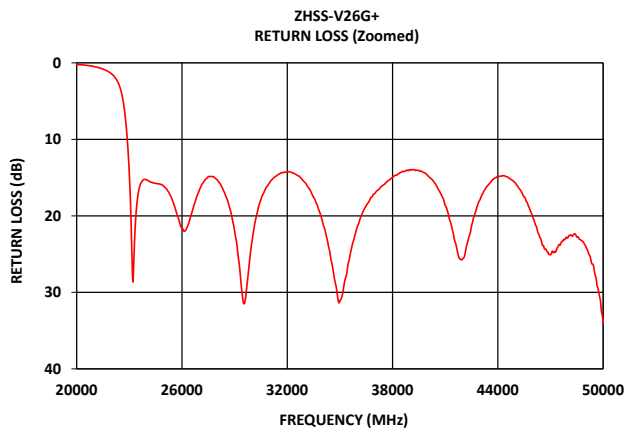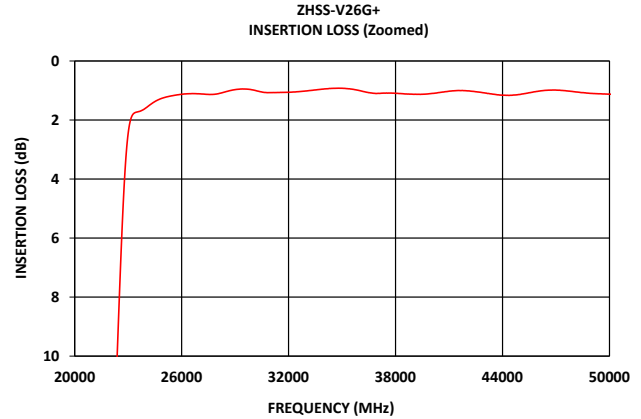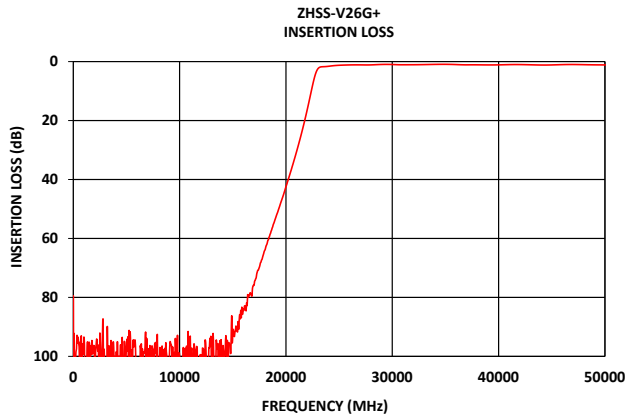



Mini-Circuits

SUSPENDED SUBSTRATE STRIPLINE COAXIAL

High Pass Filter

ZHSS-V26G+

50Ω

26 to 50 GHz


2.4mm Female

CONNECTOR DESCRIPTION

Function	Connector
RF1 ³	2.4mm Female
RF2 ³	2.4mm Female

3. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

CASE STYLE DRAWING

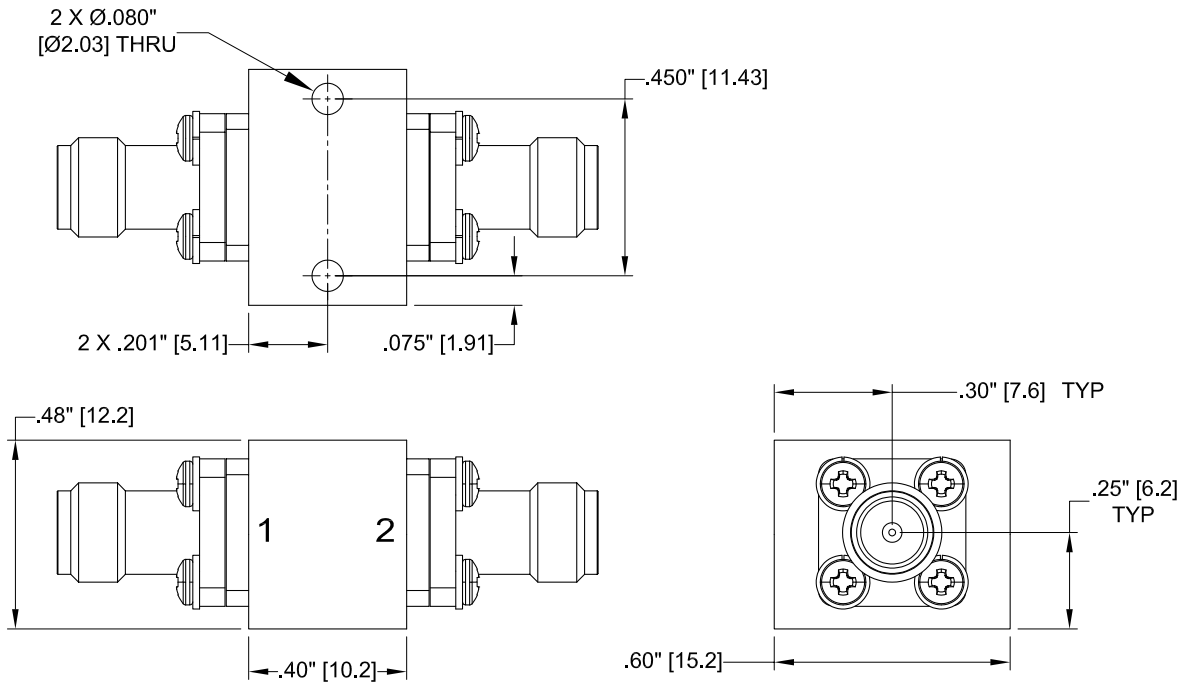

Unit Weight: 21 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl. ± 0.06 [1.5]; 3 Pl. ± 0.015 [0.38].

PRODUCT MARKING*: ZHSS-V26G+

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

SUSPENDED SUBSTRATE STRIPLINE COAXIAL

High Pass Filter

ZHSS-V26G+

50Ω

26 to 50 GHz

2.4mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	BCB3876
RoHs Status	Compliant
Environmental Ratings	ENV001

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

