

Coaxial

# Diplexer

## ZX75-2R15-S+

50Ω DC to 2150 MHz  
(DC-20, 950-2150 MHz)



Generic photo used for illustration purposes only  
CASE STYLE: FL905

### The Big Deal

- Low insertion loss
- High Rejection
- Connectorized package

### Product Overview

ZX75-2R15-S+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 20 MHz and high pass port is designed for 950 to 2150 MHz. This diplexer is used to pass IF, pilot carrier or clock synchronizing signal. This diplexer can also be used in automotive electronics, satellite systems, point-to-point radios, and multiband radio systems.

### Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
Extended stopband rejection	Spurious rejection and avoids using additional filters.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Coaxial Diplexer

## ZX75-2R15-S+

50Ω DC to 2150 MHz (DC-20, 950-2150 MHz)

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1W at 25°C

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

HIGH PASS PORT	1
LOW PASS PORT	2
COMMON PORT	3

### Outline Drawing

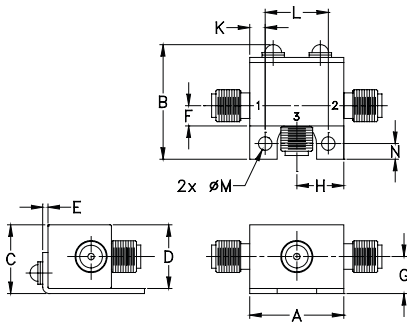

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Note: Please refer to case style drawing for details

### Features

- Low insertion loss
- 50Ω Impedance
- Combination of Low pass and High pass filters
- Connectorized package

### Applications

- Satellite systems
- Automotive electronics
- Point-to-point radios



Generic photo used for illustration purposes only  
CASE STYLE: FL905

Connectors	Model
SMA	ZX75-2R15-S+

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC-20	-	0.4	1.0	dB
		High Pass	950-2150	-	0.5	1.0	
	Return Loss	Low Pass	DC-20	18	26	-	dB
		High Pass	950-2150	18	26	-	
Common		DC-20	18	26	-		
Stop Band Isolation	Low Pass	70-2500	20	30	-	dB	
		950-2150	-	49	-		
	High Pass	DC-320	20	30	-	dB	
		DC-20	-	91	-	dB	

### Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
0.5	0.23	100.08	31.94	32.19	0.00
20.0	0.39	97.64	29.34	32.49	0.00
30.0	0.72	97.31	15.97	17.45	0.00
40.0	4.11	92.55	3.53	3.74	0.00
50.0	13.60	86.89	0.74	0.87	0.00
70.0	30.49	82.31	0.27	0.36	0.01
110.0	66.66	77.18	0.14	0.18	0.01
200.0	54.57	53.30	0.08	0.08	0.05
320.0	55.29	31.09	0.10	0.05	0.16
450.0	56.26	14.56	0.36	0.04	0.54
500.0	57.34	9.60	0.81	0.04	1.05
550.0	59.16	5.64	1.88	0.04	2.17
600.0	61.76	2.95	3.95	0.05	4.27
650.0	63.92	1.48	7.01	0.05	7.32
700.0	63.58	0.79	10.71	0.05	10.96
950.0	60.10	0.23	30.09	0.06	30.96
1250.0	58.01	0.19	25.95	0.08	27.60
1500.0	55.59	0.18	25.49	0.09	26.46
2000.0	58.34	0.19	31.74	0.11	33.20
2150.0	55.86	0.18	31.24	0.13	31.97
2300.0	54.23	0.19	29.08	0.18	29.15
2500.0	56.12	0.21	25.28	0.23	25.02






### Functional Schematic

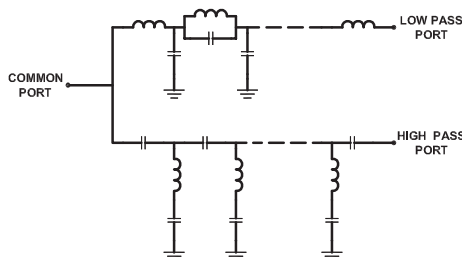

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



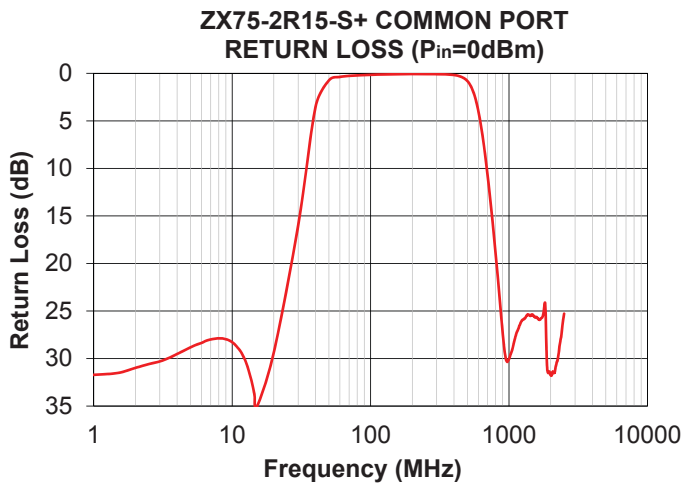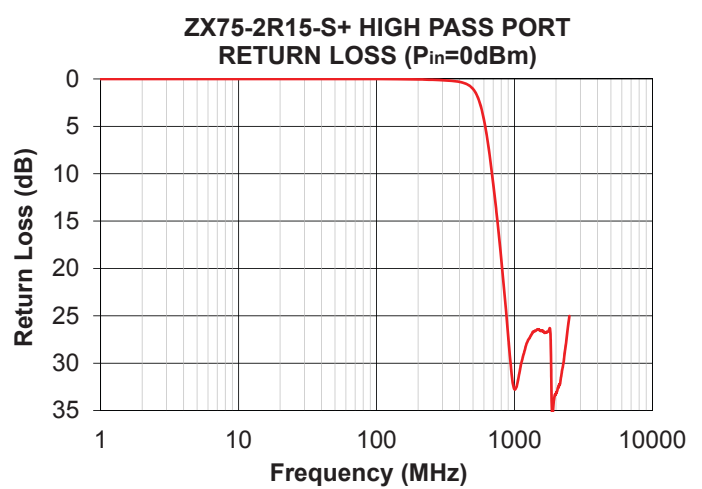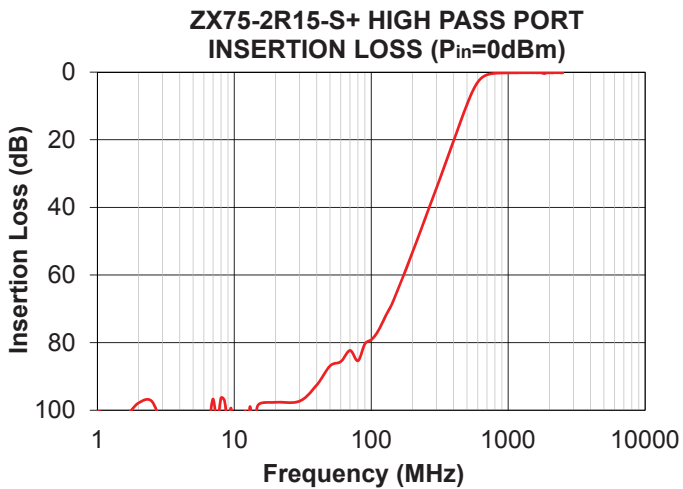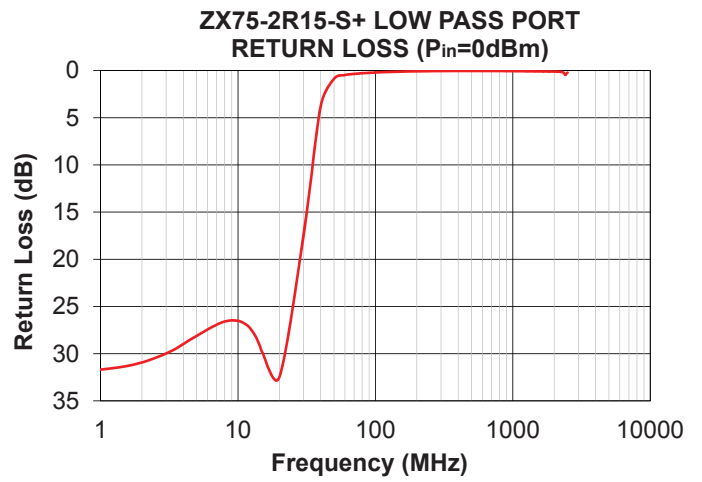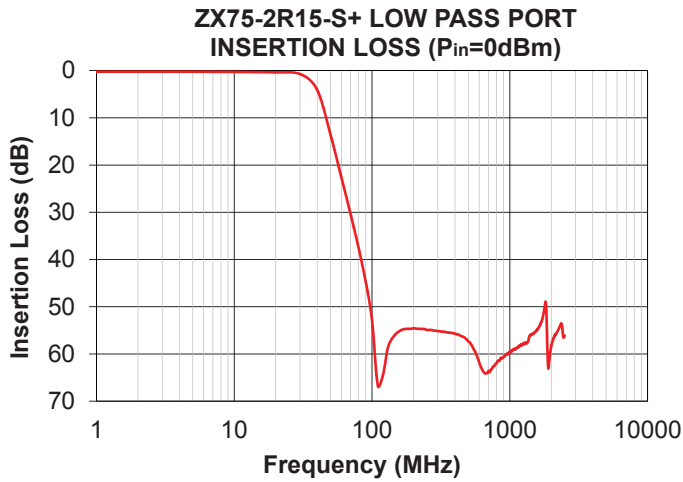

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

