

50Ω 1 to 6000 MHz 0-63 dB



Similar model shown

Product Overview


Mini-Circuits' ZTDAT series multi-channel programmable attenuator systems are ideal for a wide range of signal level control applications including transmission loss simulation, signal fading and MIMO measurements. The 1-6000 MHz operating bandwidth incorporates most of the common communications bands, supporting applications in LTE, 4G / 5G, IoT, Bluetooth, Zigbee, WiFi and many more.

Each of the 16 independently controlled attenuator channels within ZTDAT-16-6G63S provides 0 to 63 dB attenuation with more than 100 dB isolation between channels. The system is housed in a compact, 1U height, 19-inch rack chassis, with SMA connectors on the front and rear panels.

The system can be controlled via USB or Ethernet (supporting SSH, HTTP & Telnet protocols). Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32-bit and 64-bit systems). The full software and documentation package can be downloaded from our website at:

<https://www.minicircuits.com/softwaredownload/multiatt.html>.

Mini-Circuits' novel daisy-chaining interface allows multiple ZTDAT attenuator systems to be cascaded together into a Master / Slave chain. The full chain effectively becomes one system with every attenuator channel (from 8 to several hundred) controlled through a single USB or Ethernet connection and software interface.

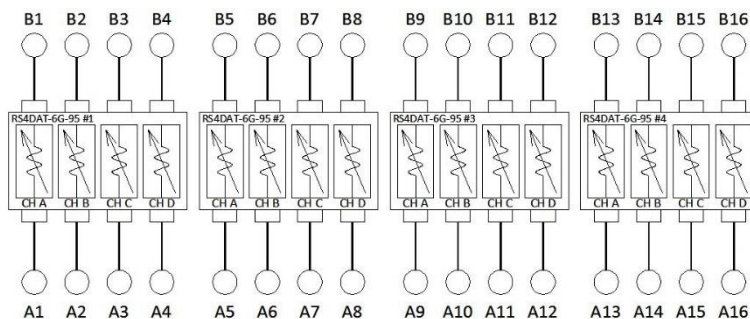

Key Features

Feature	Advantages
Integrated attenuator system	Independent control of large numbers of attenuator channels from single power supply and control interface; ideal for testing receiver sensitivity, device / base-station hand-over, interference effects and many more.
Compact package	The compact 1U height chassis minimises rack space requirements.
Ethernet / LAN Control	Remote control from any computer or device with a network connection (SSH, HTTP or Telnet protocols).

Mechanical Specifications

Dimensions	19" (W) x 1U (H) x 13" (D)			
Case Drawing	99-01-2368			
Case Material	• Aluminum (with protective coating to prevent corrosion)			
RF Connectors	Panel	Connector	Quantity	Port Labels
	Front	SMA female	16	A1-A16
	Rear		16	B1-B16
Panel Items	Front Panel		Rear Panel	
Panel Marking	<ul style="list-style-type: none"> • Model name • 16-Channel Programmable Attenuator 		<ul style="list-style-type: none"> • CE • EAC • Serial number / date code / model name 	
Other	<ul style="list-style-type: none"> • Power on / off switch with LED • Carry handles 		<ul style="list-style-type: none"> • AC mains power input (IEC C14 inlet) • USB type B socket • RJ45 (LAN) socket • 2 x D-Sub 9-pin (serial daisy-chain in & out) 	
Power Supply	AC mains power input (90-260 V, 47-63 Hz)			
Fuse	2A, 250V rating			
Temperature	Operating: 0 to +50 °C			

Electrical Specifications at 25°C

Parameter	Conditions	Min	Typ	Max	Units
Frequency Range		1		6000	MHz
Attenuation Range	0.25 dB steps	0		63	dB
Insertion Loss	1 – 2000 MHz		3.5		dB
	2000 – 4000 MHz		5.2		
	4000 – 6000 MHz		6.7		
Isolation	A <> B @ max attenuation		67		dB
	Between channels		100		dB
Input Operating Power ^{1,2}	1 MHz			+9	dBm
	50 – 6000 MHz			+23	
Return Loss	1 – 6000 MHz		15		dB



1. Total input power at A and B ports of any channel (channels are bi-directional)

2. De-rate linearly from +23 dBm at 50 MHz to +9 dBm at 1 MHz



Attenuation Accuracy:

Frequency Range	Attenuation Range	Typ	Max	Units
1 - 2000 MHz	0.25 - 20 dB	±0.25	±(4.5% of attenuation + 0.45)	dB
	20.25 - 63 dB	±0.85	±(2.0% of attenuation + 0.75)	
2000 - 4000 MHz	0.25 - 20 dB	±0.35	±(4.5% of attenuation + 0.45)	dB
	20.25 - 63 dB	±0.70	±(1.5% of attenuation + 0.85)	
4000 - 6000 MHz	0.25 - 20 dB	±0.25	±(4.5% of attenuation + 0.5)	dB
	20.25 - 63 dB	±0.55	±(2.5% of attenuation + 0.7)	


Typical Performance Data

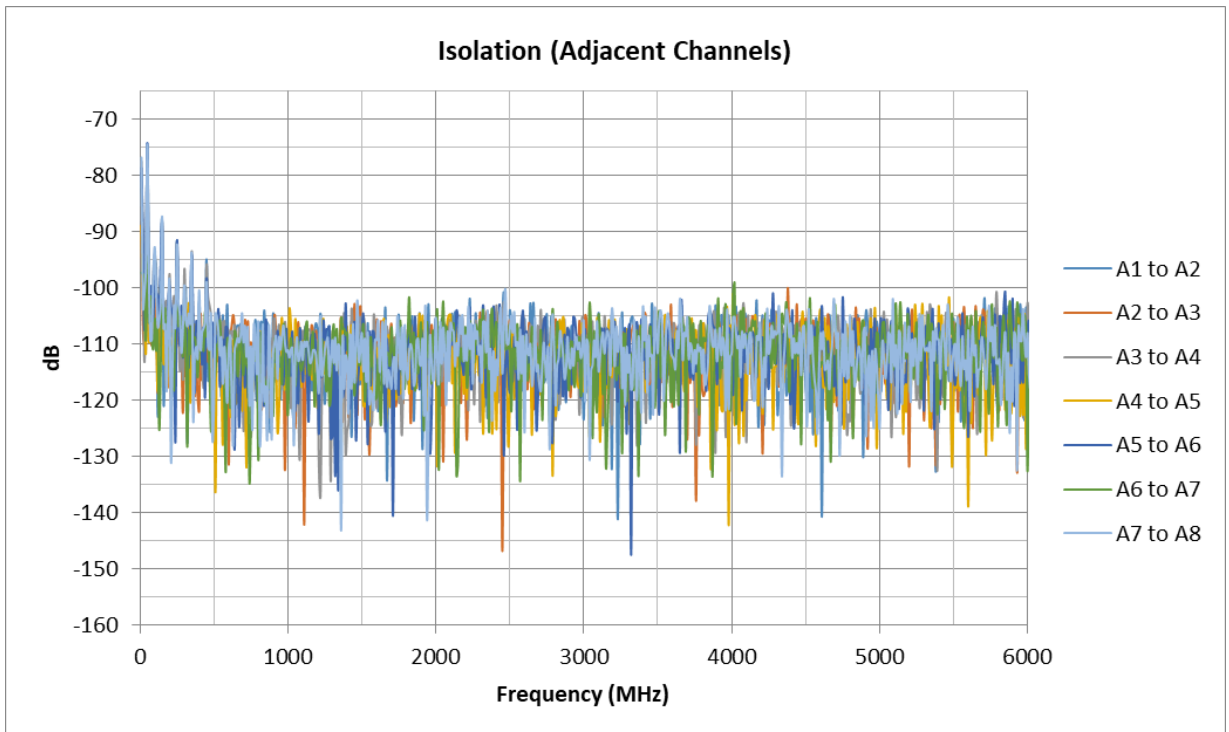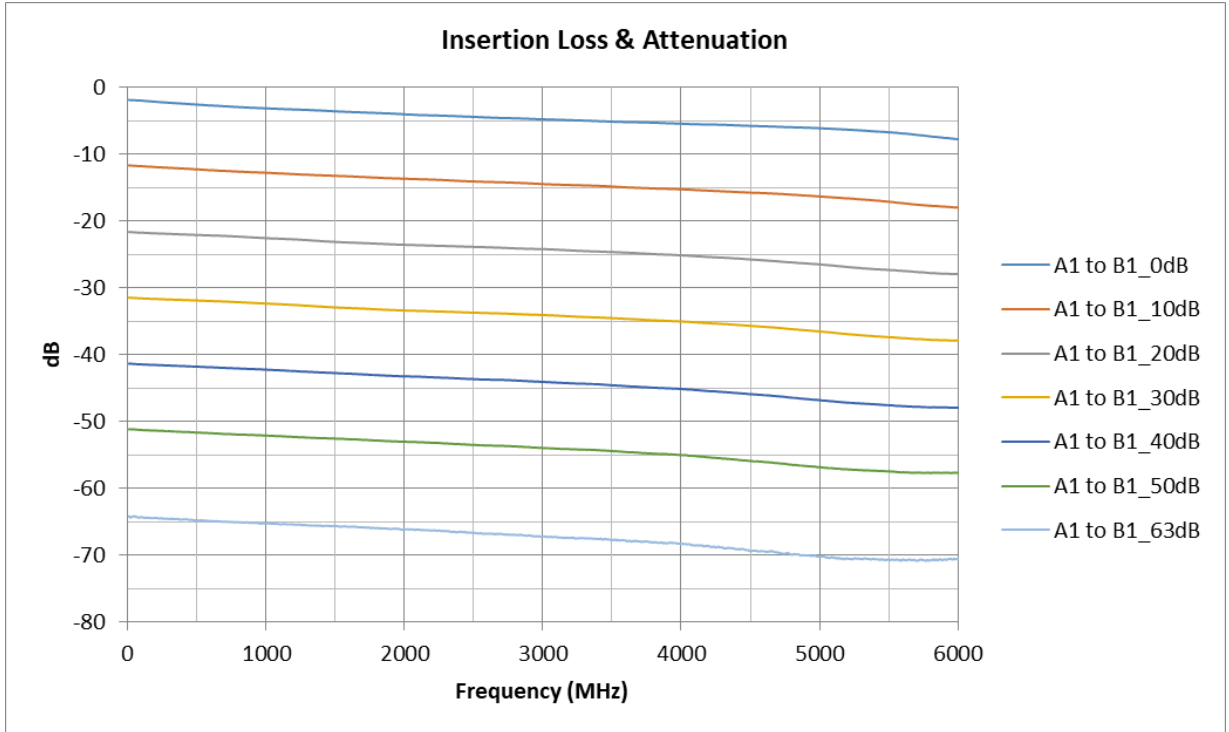

Typical Performance Data

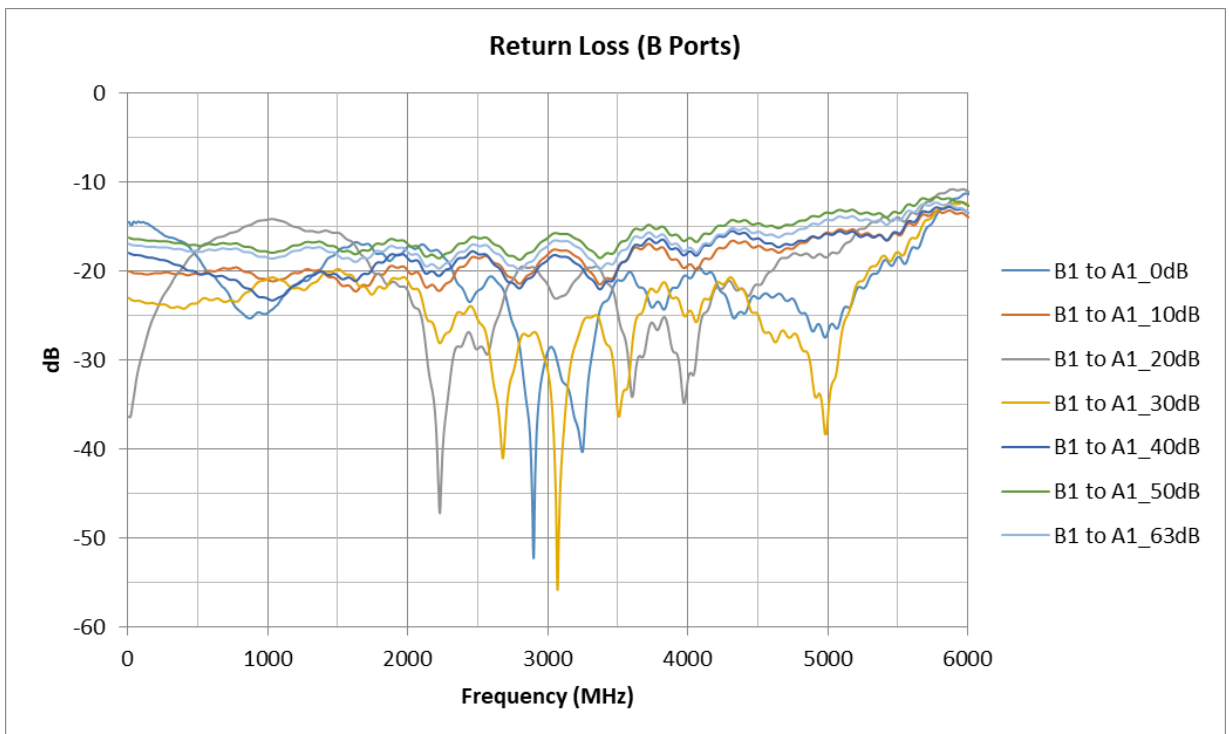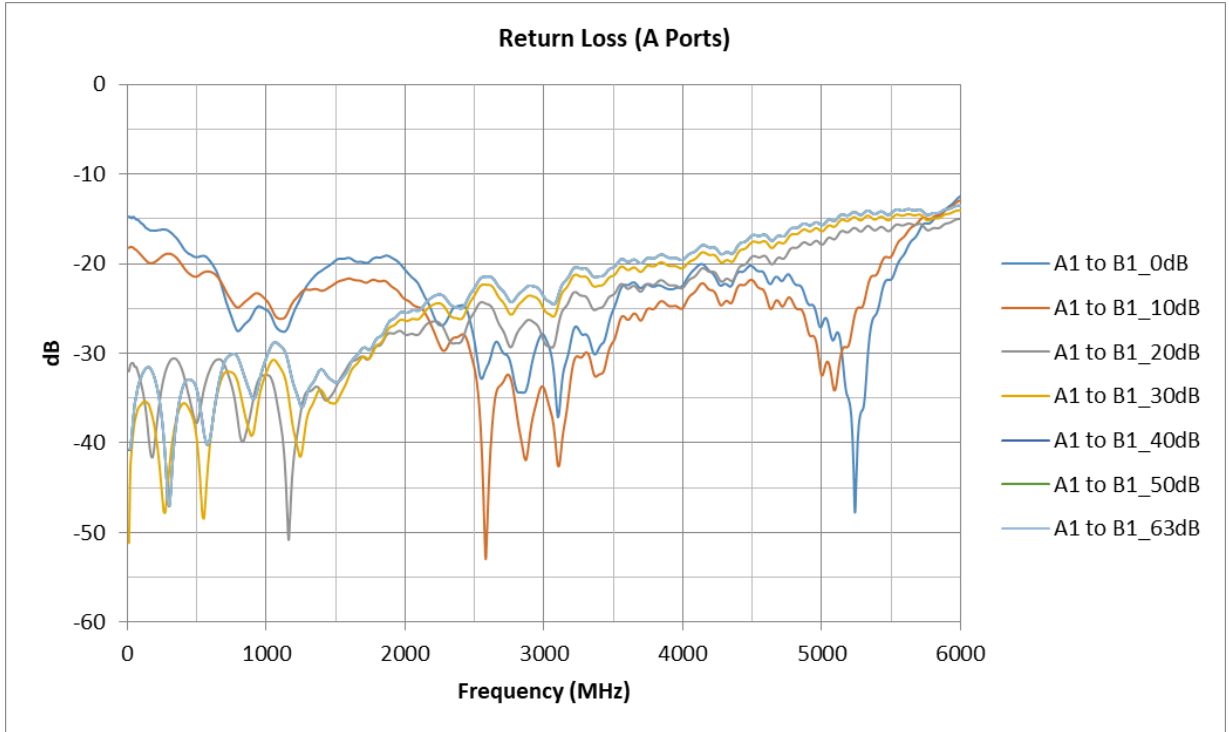

Outline Drawing

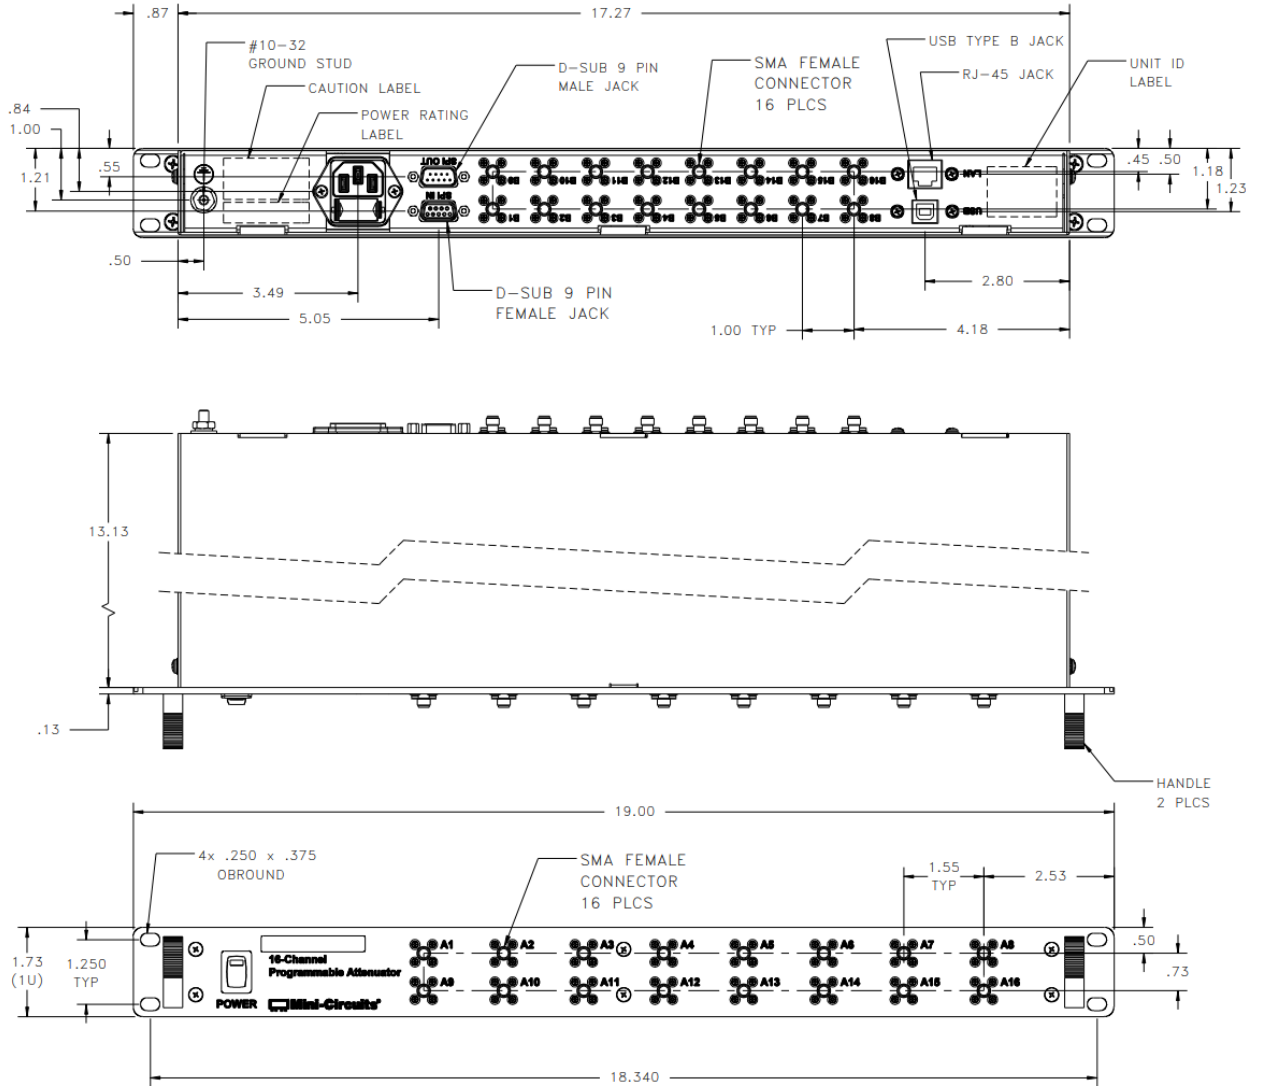

Software Specifications

- Please contact testsolutions@minicircuits.com for support

Ethernet Control	Supported Protocols	TCP / IP, SSH, HTTP, Telnet, DHCP, UDP
	Max Data Rate	100 Mbps (100Base-T Full Duplex)
USB Control	Supported Protocols	HID - High Speed
	Min Communication Time	400 µs typ
Software Support	<ul style="list-style-type: none"> • Mini-Circuits' Universal GUI for USB & LAN control (Windows only) • ASCII / SCPI command syntax for LAN programming (all OS) • ActiveX / .Net DLL APIs for USB programming (Windows only) • Interrupt codes for direct USB programming (all OS) • Full programming instructions and examples for a wide range of languages 	
Downloads	Software & Documentation	https://www.minicircuits.com/softwaredownload/multiatt.html

Programming Commands

- The key ASCII / SCPI commands for control of the system are summarized below
- These can be sent via the USB or Ethernet API
- Please refer to the programming manual for full details

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
:address:CHAN:channel:SETATT:att	Set a single attenuator channel: <ul style="list-style-type: none"> • address = address of the 4-channel attenuator block (01 to 04), refer to block diagram • channel = individual channel within the attenuator block (1 to 4) • att = the attenuation value to set • Example: :01:CHAN:1:SETATT:10.25 (set RS4DAT 01, channel 1 to 10.25 dB)
:address:CHAN:channel:ATT?	Read a single channel's attenuation: <ul style="list-style-type: none"> • address = address of the 4-channel attenuator block (01 to 04), refer to block diagram • channel = individual channel within the attenuator block (1 to 4) • Example: :01:CHAN:1:ATT?10.25 (get attenuation of RS4DAT 01, channel 1)

Graphical User Interface (GUI) for Windows - Key Features

- Connect via USB or Ethernet
- Run GUI in “demo mode” to evaluate software without a hardware connection
- View and set all attenuator channels independently or in groups
- Configure automated attenuation sweep or hop sequences
- Configure Ethernet settings
- Upgrade firmware

Model Name: ZTDAT-16-6G95
Serial Number: 123456789
System Name: Attenuator System

Channels: 32
User Name: Admin
Connection: Telnet (Demo)
IP: 10.10.10.10
Port: 23

Set Attenuation

Select Channel(s)

Single Channel Multi Channels

All Channels

Group: []

Set Attenuation (0-95 dB): [67.00] [Apply]

Auto Apply

Current Attenuation -
Channel: #1-01A: Path A1<>B1
Attenuation: 67.00 dB

Channels							
ZTDAT-16-6G95	A	B	C	D			
01	Path A1<>B1 67.00	Path A2<>B2 50.75	Path A3<>B3 55.00	Path A4<>B4 27.50			
02	Path A5<>B5 28.75	Path A6<>B6 73.50	Path A7<>B7 1.25	Path A8<>B8 72.25			
03	Path A9<>B9 77.50	Path A10<>B10 67.25	Path A11<>B11 4.25	Path A12<>B12 39.25			
04	Path A13<>B13 82.00	Path A14<>B14 75.00	Path A15<>B15 35.50	Path A16<>B16 91.50			
ZTDAT-16-6G95	A	B	C	D			
06	Path A1<>B1 82.75	Path A2<>B2 5.25	Path A3<>B3 90.25	Path A4<>B4 34.50			
07	Path A5<>B5 49.75	Path A6<>B6 73.00	Path A7<>B7 5.00	Path A8<>B8 56.25			
08	Path A9<>B9 44.50	Path A10<>B10 28.25	Path A11<>B11 59.25	Path A12<>B12 61.50			
09	Path A13<>B13 25.00	Path A14<>B14 26.50	Path A15<>B15 78.75	Path A16<>B16 78.25			

Navigation Buttons: Connection Options, Automation Mode, Configuration Settings, Ethernet Settings, Firmware, User Access Control, Multi Sequence, Show Log

Daisy-Chain Control of ZTDAT Systems

Multiple ZTDAT attenuator racks can be combined to form much larger programmable attenuator systems by daisy-chaining the serial control interfaces. This allows large numbers of attenuator channels to be controlled through a single USB or Ethernet connection and software interface. All software commands are issued to the Master unit (the first unit in the chain) which will in turn control all Slave units as required. The process is:

1. Connect the Serial Out port of the first ZTDAT unit to the Serial In port of the next ZTDAT unit
2. Continue connecting additional ZTDAT units in the same manner, as required
3. Connect the AC power inputs for all ZTDAT units in the chain
4. Connect the control connection (USB or Ethernet) to the first ZTDAT in the chain; this becomes the Master unit
5. Each individual attenuator channel within the cascaded chain can now be addressed as if they are part of the Master



Ordering Information

Please contact Mini-Circuits' Test Solutions department for price and availability:
testsolutions@minicircuits.com

Included Accessories

Model Name	Quantity	Description
CBL-3W-xx*	1	AC power cord (IEC C13 connector to local plug)
USB-CBL-AB-7+	1	USB cable (6.8 ft)
CBL-RJ45-MM-5+	1	Ethernet cable (5 ft)
HT-4-SMA	1	SMA Cable Wrench (4 in)

Cable Model	Region
CBL-3W-US	USA
CBL-3W-EU	Europe
CBL-3W-IL	Israel
CBL-3W-UK	UK
CBL-3W-AU	Australia / China

*Please specify one option on the purchase order, at no charge

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp