

# Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω

DC to 6 GHz



## The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from <1 to 25%
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions

## Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters, diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency

All our coaxial-ceramic resonator filters are built with rugged construction. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

## ZX75BP-A1060-S+

50Ω 1015 to 1105 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HY1238

### Features

- Low insertion loss
- High selectivity
- Connectorized package

### Applications

- Aeronautical navigation
- Mobile radio
- Radar system
- Aviation

### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
<b>Pass Band</b>	Center Frequency	—	—	1060	—	MHz	
	Insertion Loss	F1-F2	1015 - 1105	—	1.2	2.0	dB
	VSWR	F1-F2	1015 - 1105	—	1.3	2.0	:1
<b>Stop Band, Lower</b>	Insertion Loss	DC-F3	DC - 680	60	70	—	dB
		F3-F4	680 - 800	40	45	—	dB
	VSWR	F4-F5	800 - 880	20	25	—	dB
<b>Stop Band, Upper</b>	Insertion Loss	DC-F5	DC - 880	—	20	—	:1
		F6-F7	1350 - 1700	25	30	—	dB
	F7-F8	1700 - 2300	50	60	—	dB	
	VSWR	F8-F9	2300 - 4000	—	30	—	dB
		F6-F9	1350 - 4000	—	20	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	5 W

Permanent damage may occur if any of these limits are exceeded.


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nSec)
1	97.42	27530.55	1015	5.75
100	102.99	1873.98	1020	5.56
680	73.12	140.92	1025	5.40
800	49.03	97.72	1030	5.28
880	30.01	65.16	1035	5.17
910	21.39	45.99	1040	5.09
969	3.06	3.30	1045	5.01
1015	0.96	1.19	1050	4.95
1060	0.90	1.21	1055	4.91
1105	0.92	1.16	1060	4.87
1340	28.85	77.36	1065	4.85
1350	29.89	78.53	1070	4.83
1400	34.83	82.68	1075	4.83
1700	88.68	87.81	1080	4.84
1750	67.88	87.63	1085	4.85
2000	84.29	85.23	1090	4.87
2300	100.08	72.19	1095	4.91
3000	44.07	26.43	1100	4.95
3500	41.44	18.11	1102	4.98
4000	64.70	44.14	1105	5.01

### Functional Schematic




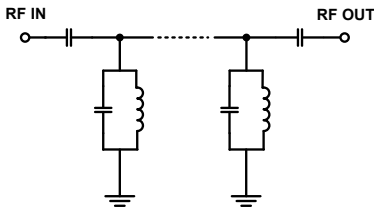


### Typical Frequency Response

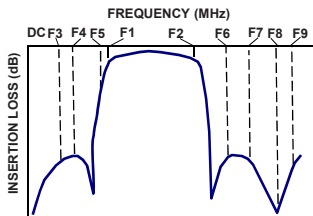

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

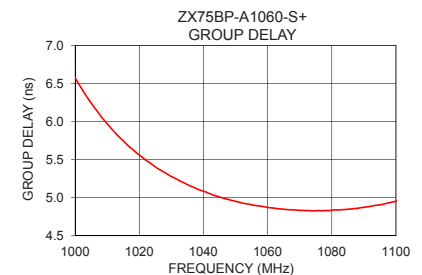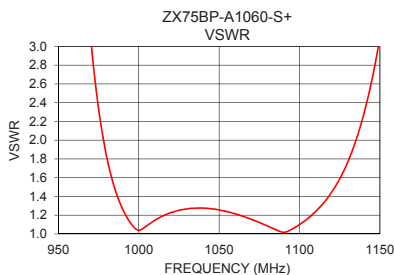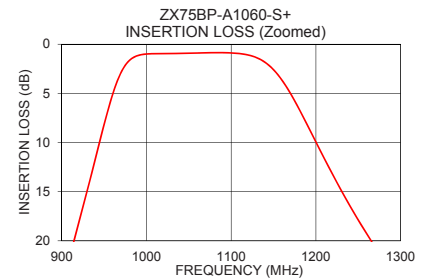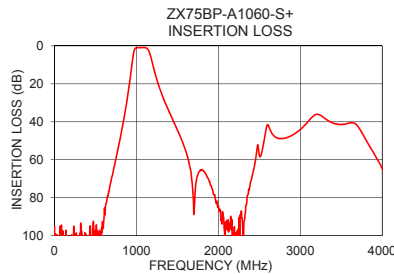

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Coaxial Connections

PORT - 1	SMA-MALE
PORT - 2	SMA-FEMALE

## Outline Drawing

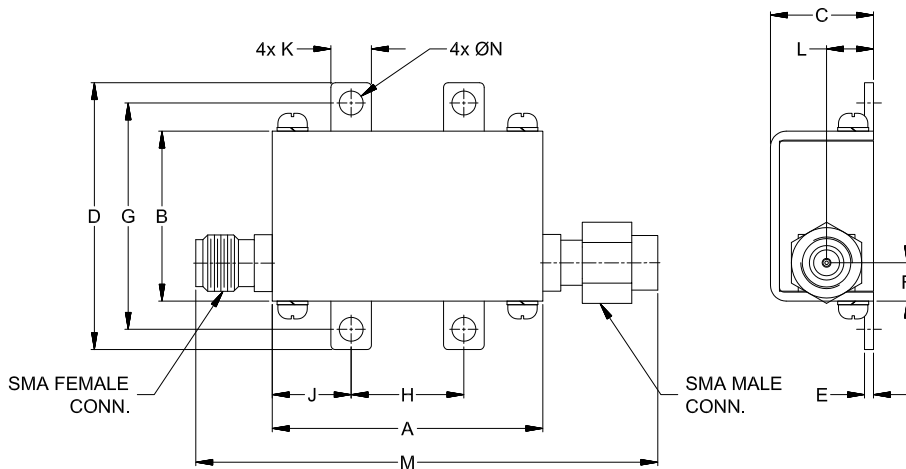

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

A	B	C	D	E	F	G
<b>1.20</b>	<b>.75</b>	<b>.46</b>	<b>1.18</b>	<b>.04</b>	<b>.17</b>	<b>1.00</b>
30.48	19.05	11.68	29.97	1.02	4.32	25.40
H	J	K	L	M	N	Wt.
<b>.50</b>	<b>.35</b>	<b>.18</b>	<b>.21</b>	<b>2.05</b>	<b>.106</b>	grams
12.70	8.89	4.57	5.28	52.07	2.69	35.0

Note: Please refer to case style drawing for details

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

