


PCB Land Pattern

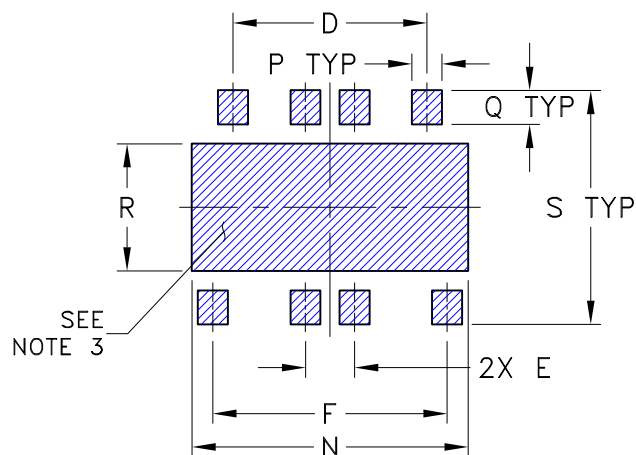

Suggested Layout,
Tolerance to be within $\pm .002$

NOTES:

- DENOTES METALLIZATION
- DENOTES SOLDER RESIST
- GROUND METALLIZATION MUST BE PROVIDED WITH THE MAXIMUM NUMBER OF PTH's FOR BETTER THERMAL TRANSFER.

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
AH1647-5	.690 (17.53)	.433 (11.00)	.400 (10.17)	.394 (10.01)	.100 (2.54)	.476 (12.09)	.560 (14.22)	.257 (6.53)	.045 (1.14)	.060 (1.52)	.194 (4.93)	.276 (7.01)	.561 (14.25)

CASE #	P	Q	R	S	WT, GRAM
AH1647-5	.061 (1.55)	.069 (1.75)	.258 (6.55)	.475 (12.06)	3.4

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01(.25)$; 3 Pl. $\pm .005(.127)$

Notes:

- Base material: Printed wiring laminate;
- Termination finish: TIN HAL LEAD FREE.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS