
THIRD ANGLE PROJECTION

REVISIONS										
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH					
OR	ECO-017025	NEW RELEASE	03/30/23	ITG	IL					
OR1	ECO-018201	CORRECTED TYPO IN NOTE 2	06/16/23	ITG	IL					
A	ECO-020890	ADDED DETAIL "A" (SH.2) & DIMENSIONS	02/16/24	ITG	IL					

SUGGESTED MOUNTING CONFIGURATION FOR NM3237 CASE STYLE

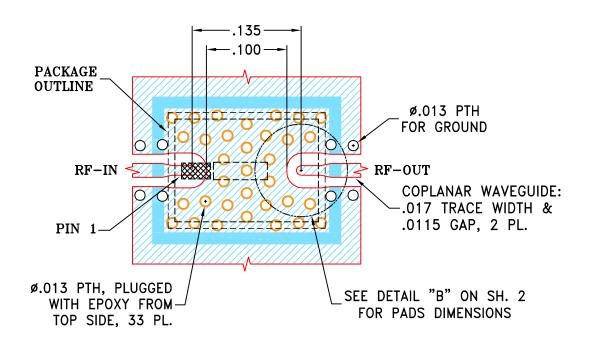


NOTES:

- 1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE									
DIMENSIONS ARE IN INCHES	DRAWN	ITG	03/30/23	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235						nue		
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	03/30/23							NI II	235	
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	IL	03/30/23	1								
FRACTIONS ±						PL.	NM32	237. [$\Gamma B - 1$	200		
Mini-Circuits ®						,		, .				
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95						code ident 15542	DRAWING NO: 98-PL-753 REV: A					A
					9	8PL753	SCALE:	8:1	SHEET:	1	OF	2

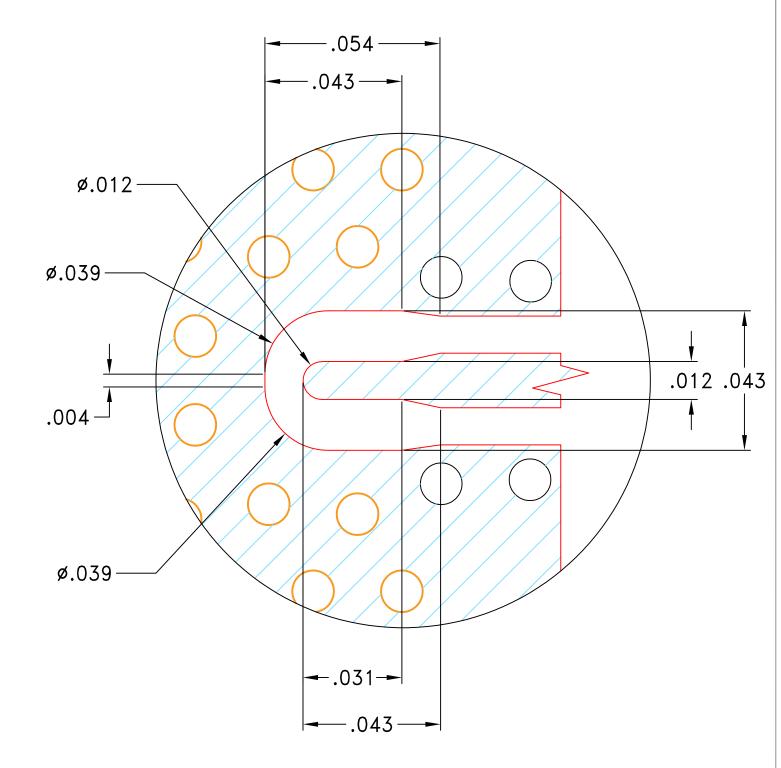

DETAIL "A". SOLDER MASK IS NOT SHOWN FOR CLARITY (SCALE 4:1)