



USB & ETHERNET

8-Channel Attenuator ZTDAT-8-44G63K

50 Ω 0.1 to 43.5 GHz 0 to 63 dB Rack-Mount 2.92 mm Female

THE BIG DEAL

- Exceptionally wide band performance, up to 43.5 GHz
- 8 independently programmable attenuator channels
- 0-63 dB attenuation per channel in 0.5 dB steps
- Configure automated sweep / hop / fading sequences
- Ethernet & USB control




Generic photo used for illustration purposes only

APPLICATIONS

- Test & measurement equipment / systems
- 5G FR1 & FR2, WiFi 6E, millimeter wave radio infrastructure
- Massive MIMO arrays
- Radar, EW and ECM defense systems
- Ku, K & Ka band satellite communications

FUNCTIONAL BLOCK DIAGRAM

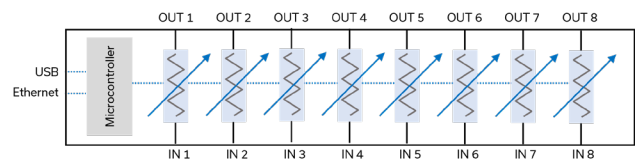

PRODUCT OVERVIEW

Mini-Circuits' ZTDAT series multi-channel programmable attenuator systems are ideal for a wide range of signal level control applications including transmission loss simulation, signal fading and MIMO measurements. The exceptional 100 MHz to 43.5 GHz operating bandwidth incorporates most of the common communications bands worldwide, supporting applications in 5G up to millimeter wavelengths.

Each of the 8 independently controlled attenuator channels provides 0 to 63 dB attenuation with 100 dB isolation between channels. The system is housed in a compact, 2U height, 19-inch rack chassis, with 2.92 mm female connectors on the front panel and power and control connections on the rear panel.

The system can be controlled via USB or Ethernet (supporting SSH, HTTP & Telnet protocols). Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments.

KEY FEATURES

Feature	Advantages
Sweep / hop / fading sequences	Configure a wide range of real-world scenarios in a test environment, including receiver sensitivity, device / base-station handovers, device failures, and interference effects.
Rack-mount chassis	Compact 2U height, 19" rack-mountable chassis suits integration in automated production test environments
Ethernet & USB control	USB HID and Ethernet (SSH / HTTP / Telnet) interfaces ensure compatibility with most software environments and





8-Channel Attenuator **ZTDAT-8-44G63K**

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Conditions	Min.	Typ.	Max.	Units
Frequency Range		0.1	-	43.5	GHz
Insertion Loss	0.1-13 GHz	-	7.0	10.0	dB
	13-26.5 GHz	-	11.0	15.0	
	26.5-43.5 GHz	-	16.0	20.0	
Isolation	IN x to OUT x @ max attenuation	65	80	-	dB
	Between channels	80	100	-	
Return Loss	0-13 GHz	-	14	-	dB
	13-43.5 GHz	-	12	-	
Attenuation Range	Relative to insertion loss	0	-	63	dB
Attenuation Steps	Nominal	-	0.5	-	dB
Minimum Dwell Time ¹	-	-	600	-	μs
Attenuation Transition Time ²	-	-	100	-	ns
Input Operating Power	Total per path	-	-	+22	dBm







1. The time taken to respond to a command to change attenuation states (ignores USB / Ethernet communication time)
2. Time between starting to change the attenuation state and settling on the requested value

TYPICAL ATTENUATION ACCURACY AT +25°C

Attenuation Setting (dB)	Nominal Attenuation (typ.)			Typical Attenuation Accuracy		
	13 GHz	26.5 GHz	43.5 GHz	13 GHz	26.5 GHz	43.5 GHz
0.5	0.45	0.40	0.30	±0.20	±0.20	±0.20
1	0.85	0.75	0.65	±0.35	±0.25	±0.30
2	2.25	2.25	2.45	±0.35	±0.30	±0.45
4	4.15	4.10	4.00	±0.30	±0.30	±0.55
8	8.20	8.40	8.60	±0.55	±0.45	±0.90
16	16.4	16.4	16.2	±0.60	±0.50	±0.90
31.5	32.2	32.6	33.0	±0.70	±0.60	±1.60
63	65.0	67.0	68.0	±2.70	±3.60	±2.90



TYPICAL PERFORMANCE CURVES

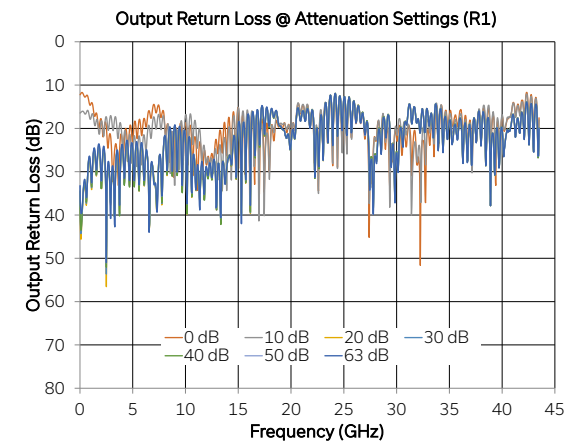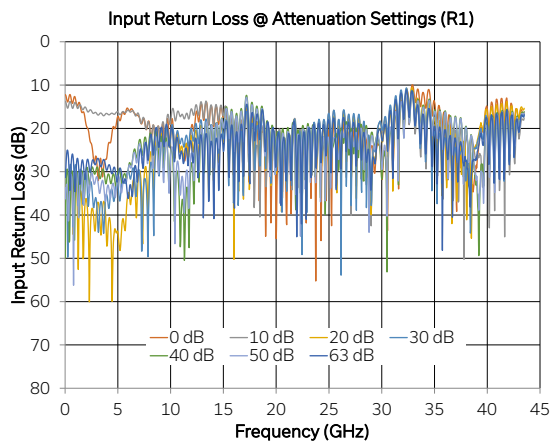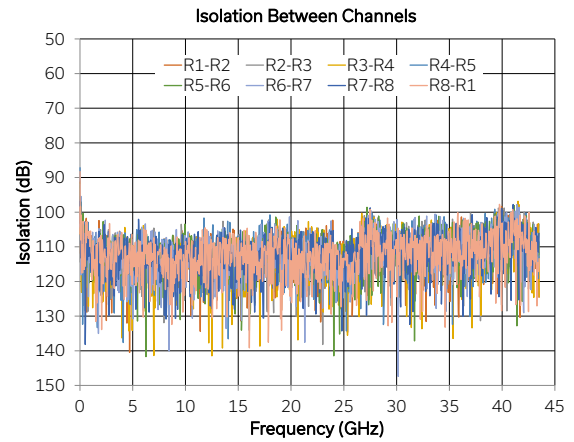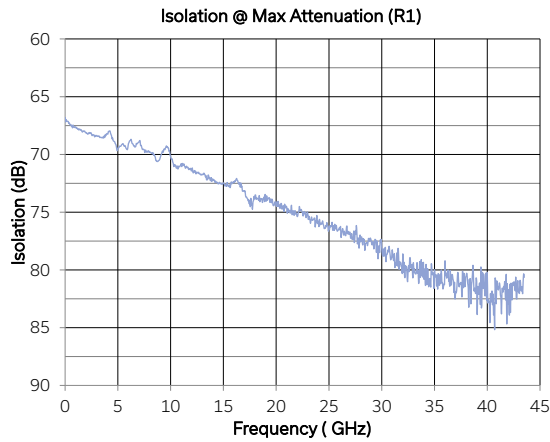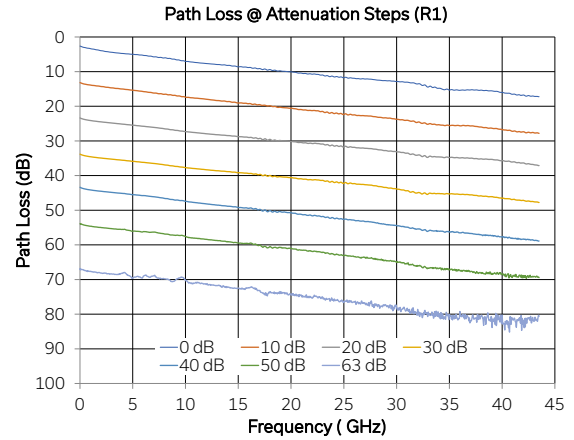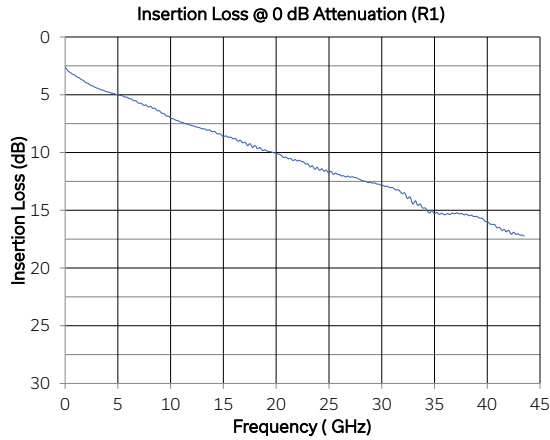

**CONTROL INTERFACES**

Ethernet Control	Supported Protocols	TCP / IP, SSH, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	100 Mbps (100Base-T Full Duplex)
USB Control	Supported Protocols	HID – High Speed
	Min Communication Time ³	400 μs typ

3. Based on the polling interval of the USB HID protocol (1 ms with 64 bytes per packet) and no other significant CPU or USB activity

SOFTWARE & DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB
- Programming / automation via Ethernet
 - Complete set of control commands which can be sent via any supported protocol – simple to implement in the majority of modern programming environments
- Programming / automation via USB
 - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX
 - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX)

Please contact testsolutions@minicircuits.com for support

MINIMUM SYSTEM REQUIREMENTS

Hardware	Intel i3 (or equivalent) or later
GUI (USB or Ethernet Control)	Windows 7 or later
USB API DLL	Windows 7 or later with support for Microsoft .Net Framework or ActiveX
USB Direct Programming	Windows 7 or later; Linux
Ethernet	Windows, Linux or macOS with Ethernet TCP / IP support

PROGRAMMING COMMANDS

The key ASCII / SCPI commands for control of the system for control via the Ethernet or USB API are summarized below (refer to the programming manual for full details):

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
:[address]:SETATT=[value]	Set a single attenuator values <ul style="list-style-type: none"> • [address] = 00 to 07 • [value] = attenuator value to set in dB • Example :02:SETATT=12.5
:[address]:ATT?	<ul style="list-style-type: none"> • Return a single attenuator value: • [address] = 00 to 07 • Example :02:ATT?




8-Channel Attenuator ZTDAT-8-44G63K


50 Ω 0.1 to 43.5 GHz 0 to 63 dB Rack-Mount 2.92 mm Female

GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS

- Connect via USB or Ethernet
- Run GUI in "demo mode" to evaluate software without a hardware connection

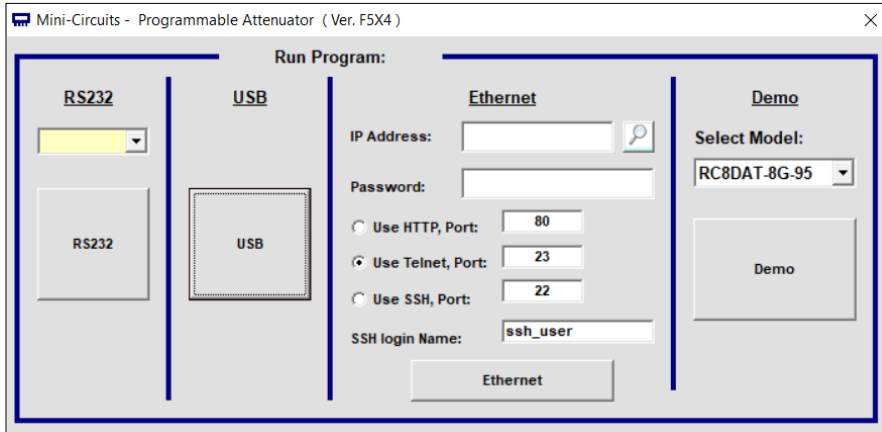

- View and set all attenuator values independently or in groups
- Configure automated sweep / hop / fading sequences
- Configure system and Ethernet settings

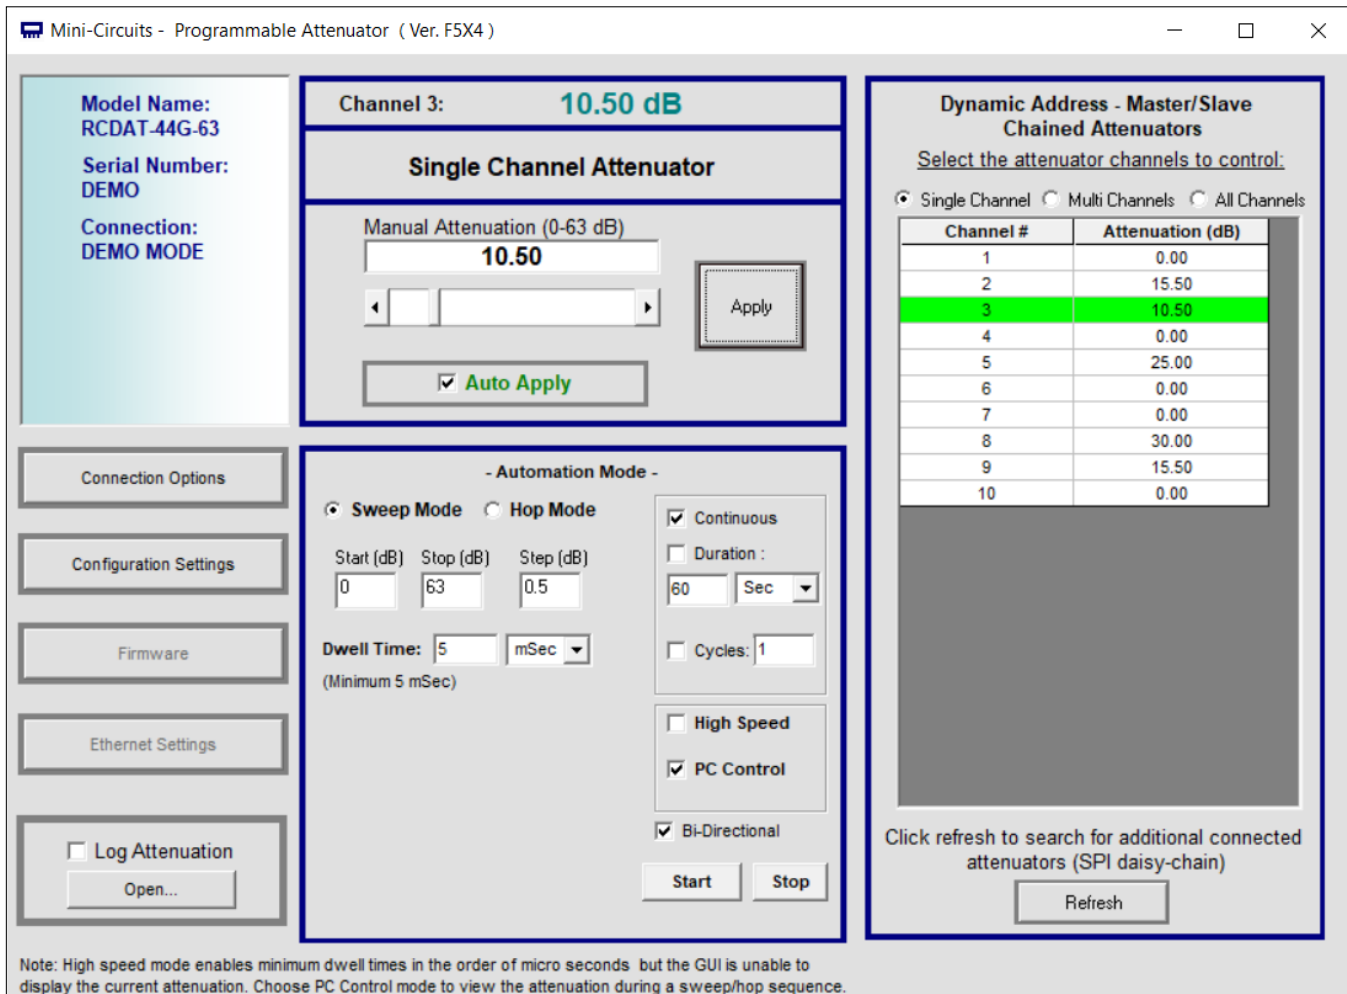

Note: High speed mode enables minimum dwell times in the order of micro seconds but the GUI is unable to display the current attenuation. Choose PC Control mode to view the attenuation during a sweep/hop sequence.



8-Channel Attenuator ZTDAT-8-44G63K

50 Ω 0.1 to 43.5 GHz 0 to 63 dB Rack-Mount 2.92 mm Female

ABSOLUTE MAXIMUM RATINGS


Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	
Input Power (No Damage)	Per port	+28	dBm

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

POWER SUPPLY

Power Supply	AC mains input: 100-240 V, 50 / 60 Hz
Fuse	2A, 250V rating
Power Consumption	85W maximum

ELECTRICAL SCHEMATIC

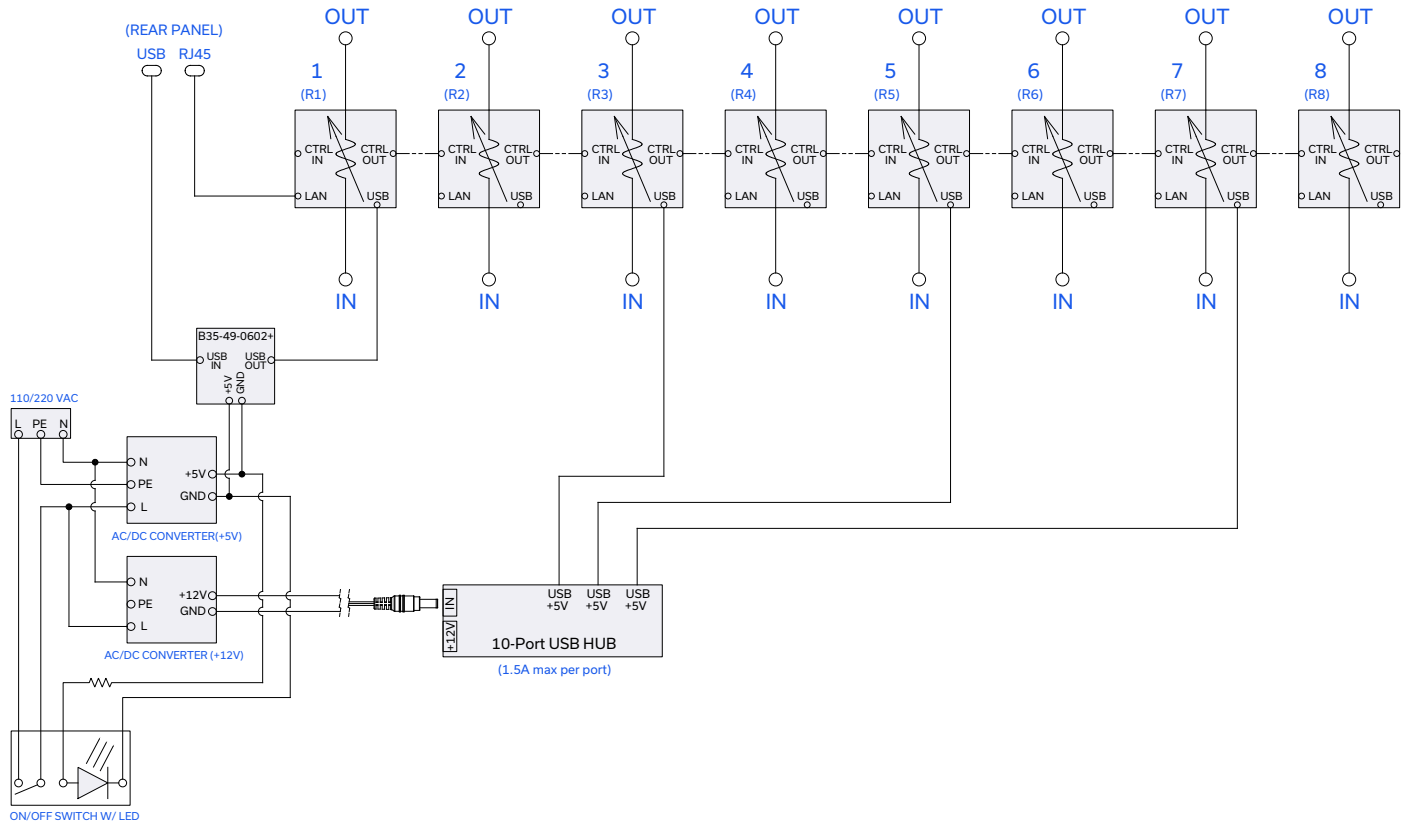

CONNECTIONS

Port	Connector
IN1-8 & OUT1-8	2.92 mm female
USB	USB type B
Ethernet / LAN	RJ45
AC Input	IEC C14 inlet




USB & ETHERNET

8-Channel Attenuator ZTDAT-8-44G63K

50 Ω 0.1 to 43.5 GHz 0 to 63 dB Rack-Mount 2.92 mm Female

CASE STYLE DRAWING

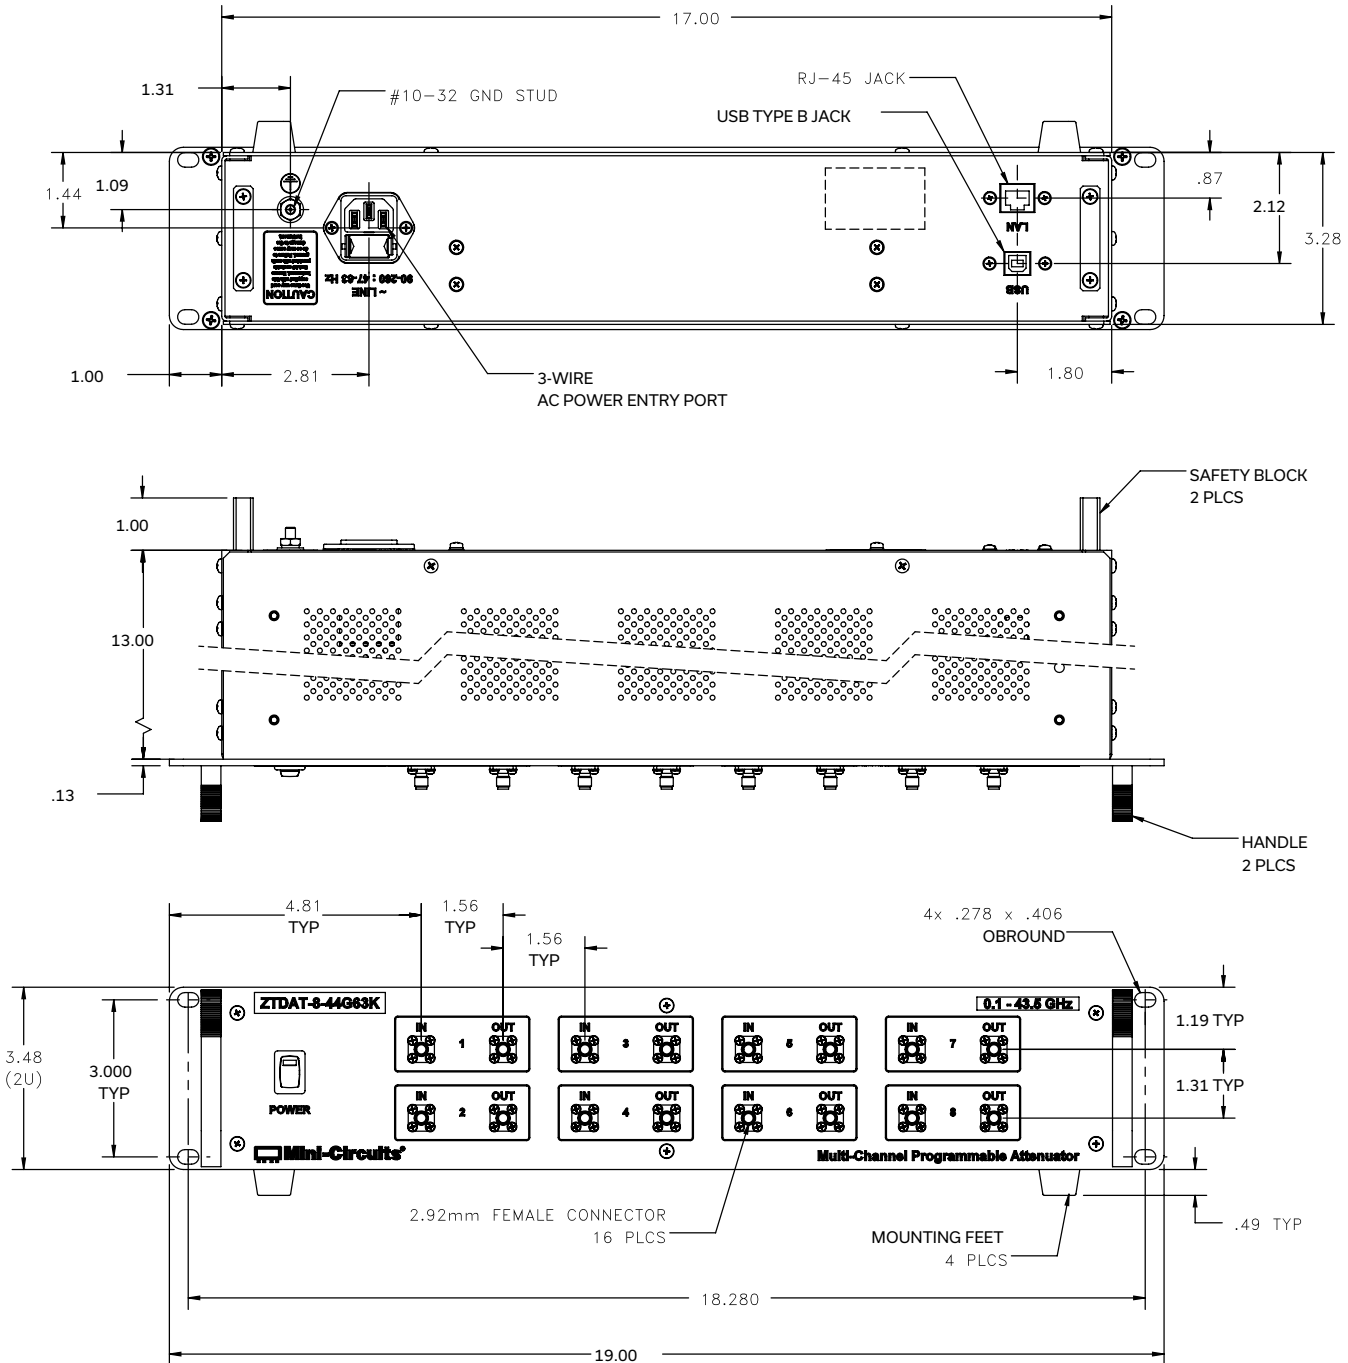

PRODUCT MARKING*

Model Name: ZTDAT-8-44G63K

Product Description: Multi-Channel Programmable Attenuator

Product Frequency: 0.1-43.5 GHz

Unit ID Label: Serial number and other identification marks

*Marking may contain other features or characters for internal lot control





USB & ETHERNET

8-Channel Attenuator **ZTDAT-8-44G63K**




Mini-Circuits






50 Ω 0.1 to 43.5 GHz 0 to 63 dB Rack-Mount 2.92 mm Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	99-01-3510
Software, User Guide & Programming Manual	www.minicircuits.com/softwaredownload/patt.html
Environmental Rating	ENV55
Regulatory Compliance	<p>Refer to our website for compliance methodologies and qualifications</p>  <p>www.minicircuits.com/quality/environmental_introduction.html</p>

Contact Us: testsolutions@minicircuits.com

Included Accessories	Part Number	Description
	CBL-3W-xx	AC power cord (IEC C13 connector to local plug) Select one option from the list below. Please contact Please contact testsolutions@minicircuits.com if your regions is not listed.
	USB-CBL-AB-7+	USB cable (6.8ft) type A to type B
	CBL-RJ45-MM-5+	Ethernet cable (5 ft)
	HT-4-SMA	SMA connector wrench (4" length)

AC Power Cord Options	Part Number	Description
	CBL-3W-US	USA NEMA 5-15 plug (type B) to IEC C13 connector
	CBL-3W-EU	Europe CEE 7/7 plug (type E/F) to IEC C13 connector
	CBL-3W-UK	UK BS-1363 plug (type G) to IEC C13 connector
	CBL-3W-AU	Australia & China AS/NZS 3112 plug (type I) to IEC C13 connector
	CBL-3W-IL	Israel SI-32 plug (type H) to IEC C13 connector

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

