


Cavity Bandpass Filters

50Ω DC to 40 GHz

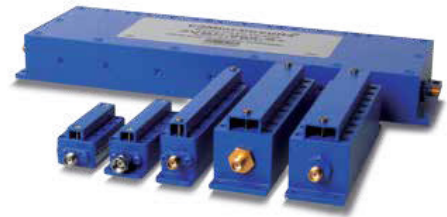

The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 36 GHz
- Stopbands up to 40 GHz

Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Custom integrated assembly with LNA and bias tees results in greatly simplifying system integration. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

ZVBP-4900-S+

50Ω 4840 to 4960 MHz



Generic photo used for illustration purposes only

CASE STYLE: ME1656

Connectors Model
SMA-F ZVBP-4900-S+

Features

- Low insertion loss, 1.2 dB typical
- Good VSWR, 1.22:1 typical
- High rejection
- Fast roll-off
- Connectorized package

Applications

- Wi-Fi application
- Telecommunications and broadband
- Transmitters and receivers

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	-	-	4900	-	MHz	
	Insertion Loss	F1-F2	4840-4960	-	1.20	2.00	dB
	VSWR	F1-F2	4840-4960	-	1.22	1.43	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 4670	20	29	-	dB
	VSWR	DC-F3	DC - 4670	-	20	-	:1
Stop Band, Upper	Insertion Loss	F4-F5	5100-9000	20	28	-	dB
	VSWR	F4-F5	5100-9000	-	20	-	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	10 W max.

Permanent damage may occur if any of these limits are exceeded.


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10	88.58	868.59	4840	5.79
500	101.01	124.09	4846	5.53
2000	102.54	157.93	4852	5.35
4400	61.56	86.86	4858	5.22
4670	34.13	69.49	4864	5.12
4690	30.78	64.35	4870	5.03
4740	20.47	40.41	4876	4.97
4776	10.54	14.62	4882	4.91
4802	3.34	3.25	4888	4.88
4840	1.07	1.13	4894	4.86
4900	0.99	1.18	4900	4.86
4960	1.18	1.12	4912	4.92
4990	3.24	2.84	4918	4.98
5006	7.47	7.25	4924	5.04
5030	14.85	17.93	4930	5.12
5050	20.26	25.94	4936	5.21
5096	30.18	38.61	4942	5.33
5100	30.92	39.49	4948	5.50
7500	95.27	102.19	4954	5.75
9000	73.32	82.73	4960	6.09

Functional Schematic




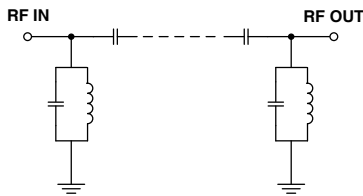


Typical Frequency Response

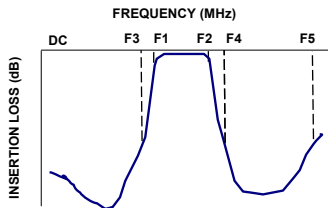

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

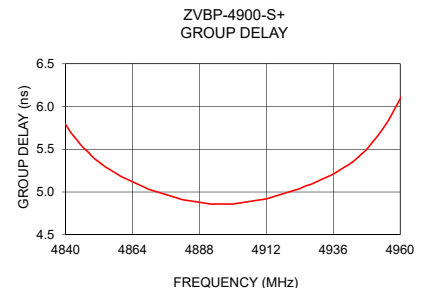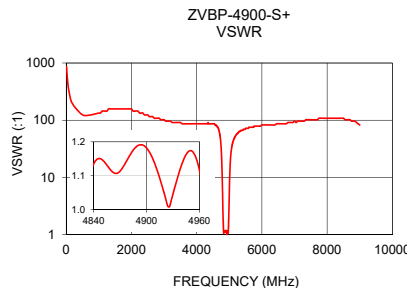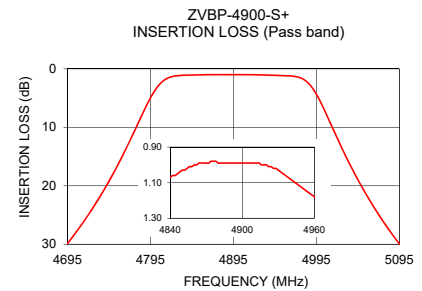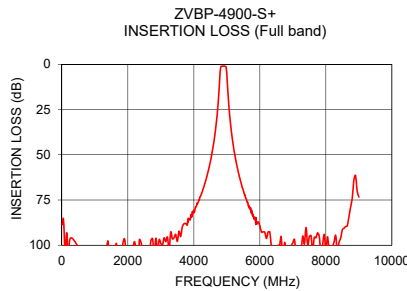

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

PORT - 1	SMA-FEMALE
PORT - 2	SMA-FEMALE

Outline Drawing

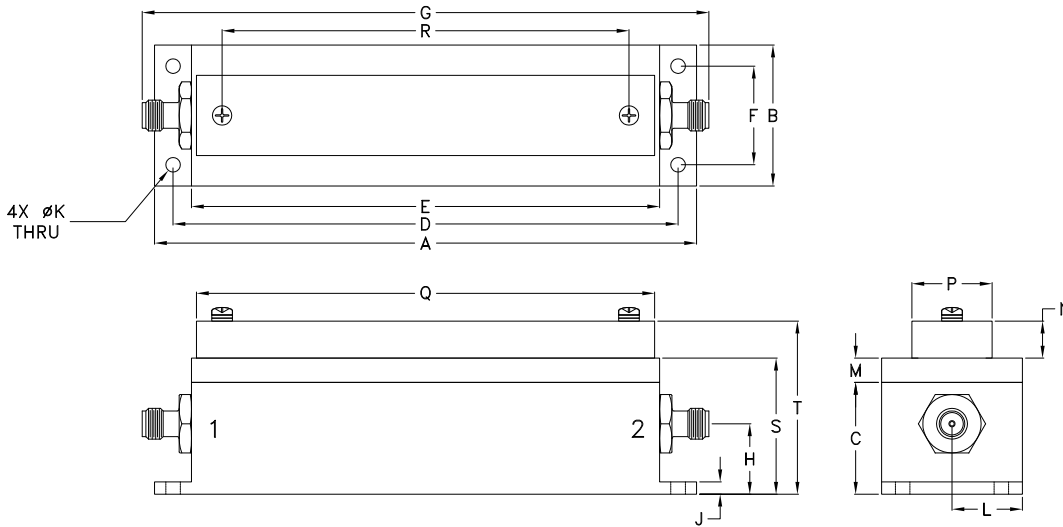

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
4.40	1.14	0.91	4.096	3.80	0.800	4.60	0.57	0.10	0.118
111.66	29.03	23.01	104.04	96.42	20.32	116.74	14.50	2.54	3.00
L	M	N	P	Q	R	S	T	Wt.	
0.57	0.20	0.30	0.65	3.72	3.30	1.10	1.40	grams	
14.53	5.00	7.62	16.51	94.39	83.82	28.02	35.64	160	

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

