



Mini-Circuits

THIN FILM SURFACE MOUNT

Band Pass Filter

ABF-7R625G+


50Ω 7.45 to 7.8 GHz

KEY FEATURES

- Low Passband Insertion Loss of 1.4dB Typ.
- High Rejection of 54dB Typ.
- Good Return Loss of 15dB Typ.
- Small Size, 5.59 x 8.13 x 2.03 mm

APPLICATIONS

- Weather Radar and Satellite Communication Systems
- Test and Measurement Equipment




Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' Surface Mount Thin-Film filters offer low insertion loss and high rejection realized via Thin-Film on Alumina substrate, using a sputtering process that can guarantee an enhanced Q and repeatable performance. Low pass, high pass, and bandpass surface mount thin-film designs can be realized with this technology up to 40GHz in a small form factor helping customers achieve their SWaP objectives. Using our high quality thin-film manufacturing process we can guarantee repeatability on large batches of filters.

FUNCTIONAL DIAGRAM

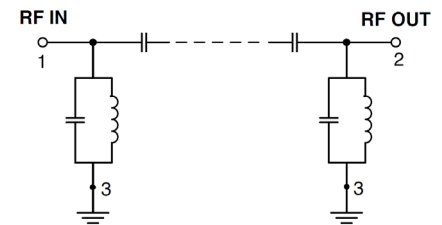

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Pass Band	Center Frequency ³	—	—	—	7.625	—	GHz
	Insertion Loss	F1-F2	7.45 - 7.8	—	1.4	2.5	dB
	Return Loss	F1-F2	7.45 - 7.8	—	15	—	dB
Stop Band Lower	Rejection	DC-F3	DC - 6	40	54	—	dB
		F3-F4	6 - 6.5	20	39	—	
Stop Band, Upper	Rejection	F5-F6	9 - 11	22	30	—	dB
		F6-F7	11 - 14	43	54	—	
		F7-F8	14 - 18	—	50	—	

1. Tested on Evaluation Board P/N TB-ABF-7R625G+ with feedline losses removed by normalization of S12 and S21 traces to measurement of TB thru-line.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. Typical variation $\pm 3\%$


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁵	6W Max. at 25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

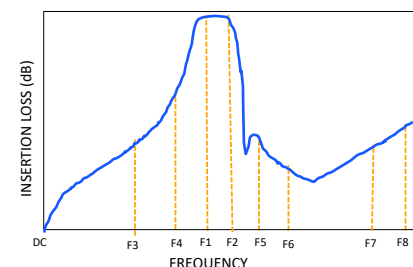

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-020314
ABF-7R625G+
EDU4389
URJ
231219

PAGE 1 OF 6



Mini-Circuits





THIN FILM SURFACE MOUNT

Band Pass Filter

ABF-7R625G+

50 Ω 7.45 to 7.8 GHz

TYPICAL PERFORMANCE GRAPHS AT +25°C

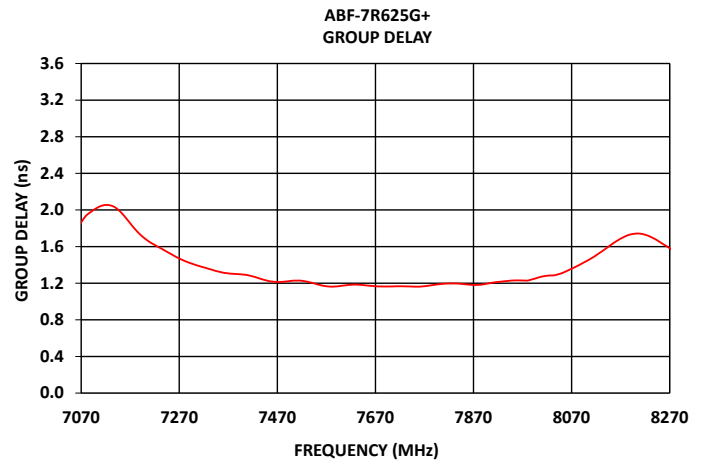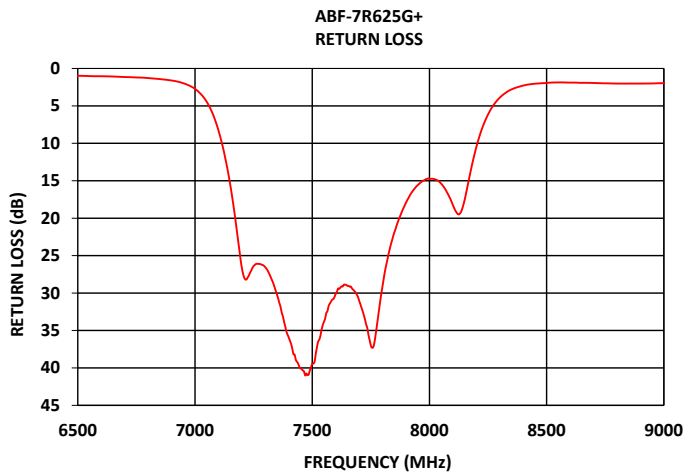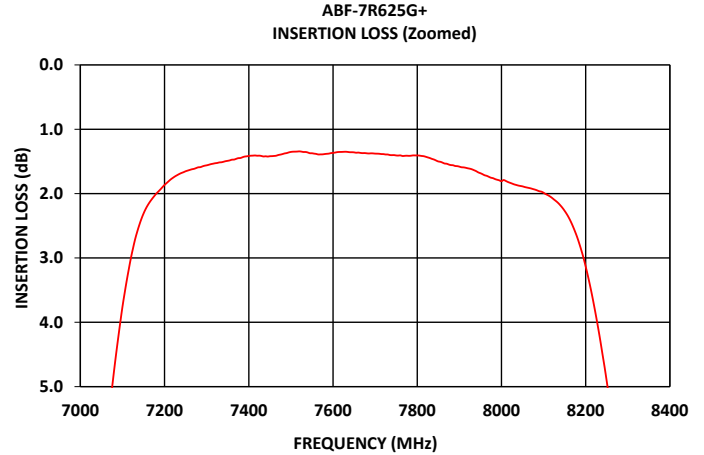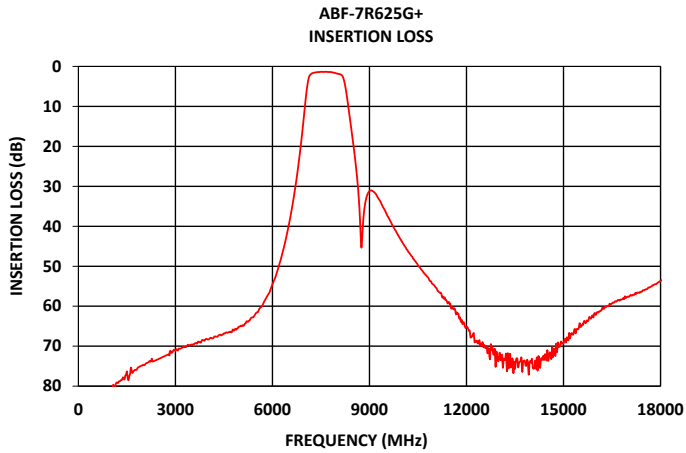



Mini-Circuits

THIN FILM SURFACE MOUNT

Band Pass Filter

ABF-7R625G+

50Ω 7.45 to 7.8 GHz

FUNCTIONAL DIAGRAM


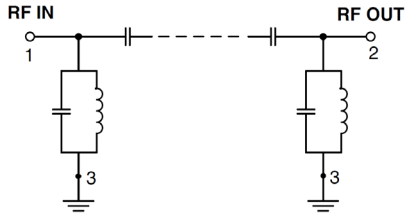


Figure 1. ABF-7R625G+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1 ²	1	Connects to RF Input Port
RF2 ²	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-652)
NC	—	No connection, not used internally. See drawing PL-652 for connection to PCB

SUGGESTED PCB LAYOUT (PL-652)

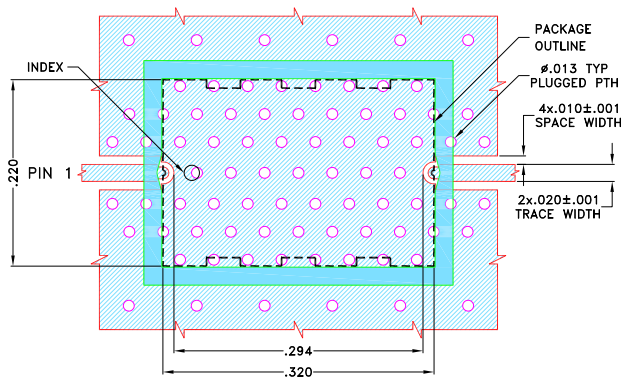


NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.0010. COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-652

CASE STYLE DRAWING

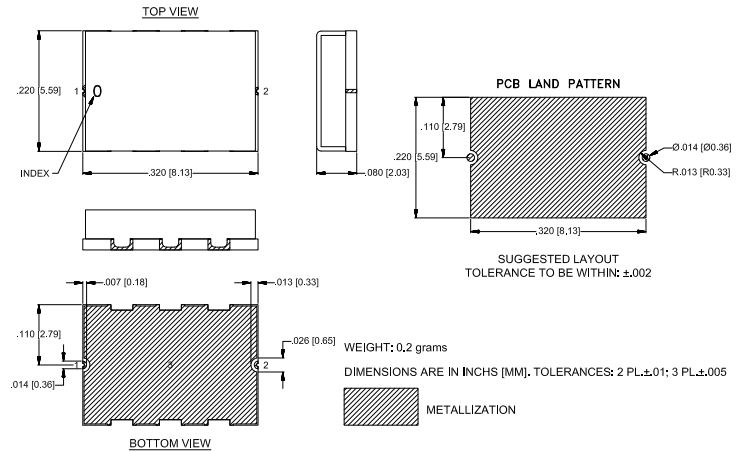

PRODUCT MARKING*: ABF-7R625G

*Marking may contain other features or characters for internal lot control.



Mini-Circuits


THIN FILM SURFACE MOUNT

Band Pass Filter

ABF-7R625G+



50 Ω 7.45 to 7.8 GHz

RECOMMENDED PCB LAYOUT PATTERN FOR FILTER

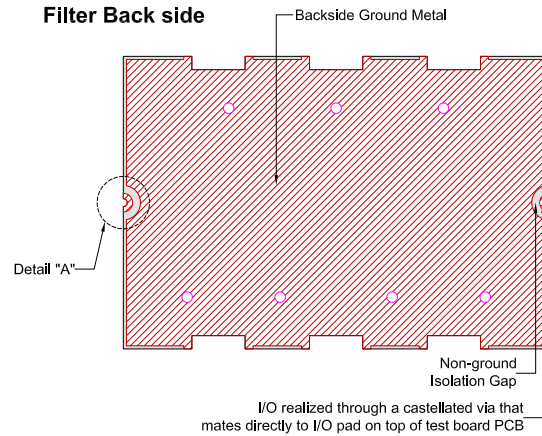

PCB Pattern Recommendations

Filter RF I/O Detail
(Filter Back Side)

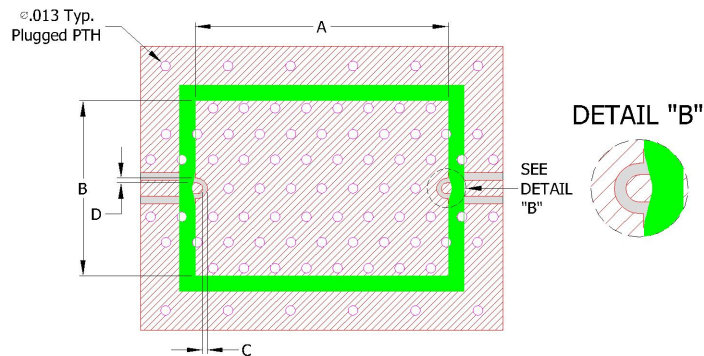



- 1) Customer PCB's ground pattern length (dimension A) can be similar to filter length.
- 2) Customer PCB's ground pattern width (dimension B) can be similar filter width.
- 3) Dimensions C and D on Filter RF I/O detail and Customer PCB pattern can be closely match. The dimensions of C and D on the Customer PCB pattern can be slightly larger to account for component alignment tolerance (ground metal can be pulled back from RF I/O trace).
- 4) Recommend to use Solder mask at Customer PCB at outer area of filter pattern/ footprint with a clearance of about 1.25mil at each side. (Tighter registration tolerance required for solder mask)
- 5) Recommended to use Solder mask at I/O of Customer PCB as per above diagram (refer detail B).



**COMMENTS ON COMPONENT HANDLING AND SOLDER ATTACH**

- 1) Avoid using soldering iron directly to the ceramic filter. This would lead to development of crack in the component due to thermal shock.
- 2) Vacuum pick-up tool or plastic tweezers are recommended for handling the components. Extra care should be taken not to scratch the filter or metal area.
- 3) Use 2-3 mil thickness stencil plate and screen print the solder. Refer below picture for recommended stencil pattern to get the best solder attachment.

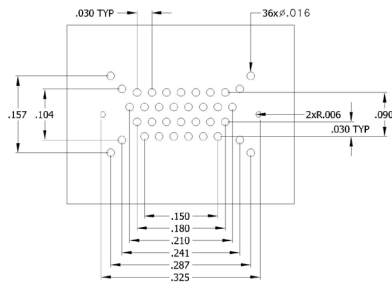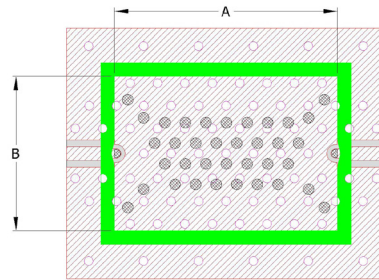Stencil opening drawing**Solder location after screen print**

- 4) Plugged ground vias in the PWB will improve attachment consistency.
- 5) Recommended to have a similar or closer test board material and thickness (refer Mini-Circuits evaluation board for details) to minimize the CTE over the temperature range.



Mini-Circuits

THIN FILM SURFACE MOUNT

Band Pass Filter

ABF-7R625G+

50Ω 7.45 to 7.8 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	UC2731 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F003
Suggested Layout for PCB Design	PL-652
Evaluation Board	TB-ABF-7R625G+
	Gerber File
Environmental Rating	ENV120

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html







Thin-Film Bandpass Filter

ABF-7R625G+

Typical Performance Data


FREQ.	Insertion Loss	Input Return Loss	Output Return Loss	FREQ.	Group Delay
(MHz)	(dB)	(dB)	(dB)	(MHz)	(ns)
1	98.66	0.11	0.11	7450	1.23
10	107.36	0.07	0.09	7455	1.22
50	96.23	0.09	0.10	7460	1.22
100	100.12	0.03	0.05	7465	1.22
150	95.29	0.12	0.13	7470	1.21
200	94.98	0.15	0.16	7475	1.21
300	92.57	0.20	0.21	7480	1.22
400	89.44	0.24	0.24	7485	1.22
500	87.67	0.27	0.27	7490	1.22
600	86.14	0.29	0.29	7495	1.22
700	84.34	0.32	0.31	7500	1.23
800	82.39	0.35	0.34	7505	1.23
900	81.42	0.35	0.34	7510	1.23
1000	80.91	0.35	0.35	7515	1.23
1500	76.30	0.36	0.35	7520	1.23
2000	74.67	0.36	0.35	7525	1.22
2200	73.70	0.33	0.31	7530	1.22
3000	71.09	0.31	0.29	7535	1.21
3500	69.55	0.33	0.31	7540	1.20
4000	68.34	0.39	0.37	7545	1.20
5000	65.03	0.61	0.60	7550	1.19
6000	54.56	0.81	0.76	7555	1.18
6500	39.94	0.98	0.93	7560	1.18
6700	30.60	1.15	1.11	7565	1.17
6850	21.60	1.42	1.40	7570	1.17
7000	10.34	2.73	2.76	7575	1.16
7070	5.31	5.65	5.71	7580	1.16
7120	3.00	10.66	10.79	7585	1.16
7450	1.42	40.06	31.71	7590	1.16
7500	1.35	39.45	31.43	7595	1.17
7550	1.37	33.84	30.16	7600	1.17
7600	1.37	30.13	28.91	7605	1.17
7625	1.35	29.11	28.33	7610	1.18
7650	1.36	29.04	28.17	7615	1.18
7700	1.38	31.00	30.08	7620	1.18
7750	1.41	37.00	36.86	7625	1.18
7800	1.41	29.06	29.77	7630	1.19
8195	3.00	11.12	11.59	7635	1.18
8260	5.35	5.56	5.68	7640	1.18
8350	10.30	2.80	2.86	7645	1.18
8500	19.47	1.93	1.94	7650	1.18
8650	30.79	1.92	1.92	7655	1.17
9000	31.18	1.97	1.90	7660	1.17
9500	36.40	1.49	1.45	7665	1.17
10000	43.74	1.29	1.29	7670	1.17
10500	49.75	1.21	1.22	7675	1.17
11000	54.78	1.15	1.17	7680	1.16
11500	59.33	1.12	1.13	7685	1.16
12000	65.17	1.09	1.13	7690	1.16
12500	68.97	1.09	1.14	7700	1.16
13000	73.18	1.10	1.13	7710	1.17
13500	75.67	1.11	1.16	7720	1.17
14000	74.13	1.18	1.18	7730	1.17
14500	70.98	1.25	1.25	7740	1.16
15000	69.29	1.34	1.33	7750	1.16
15500	64.24	1.45	1.44	7760	1.16
16000	62.20	1.50	1.53	7770	1.17
16500	59.28	1.51	1.57	7780	1.17
17000	57.56	1.48	1.54	7790	1.18
18000	53.59	1.37	1.40	7800	1.19

Typical Performance Curves

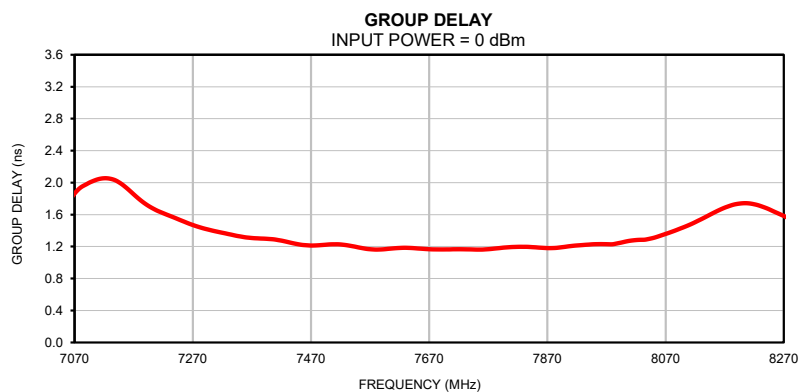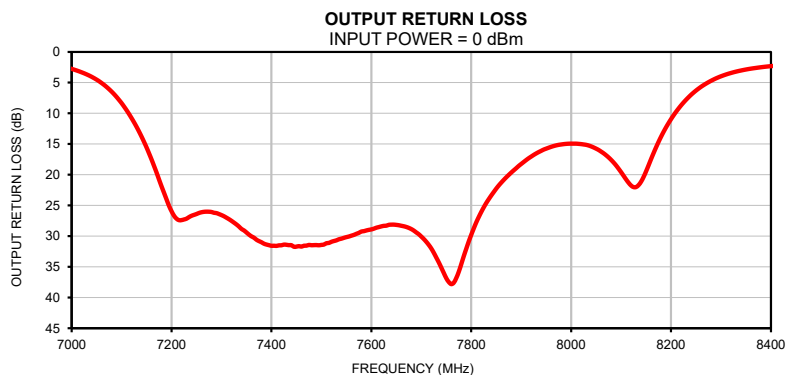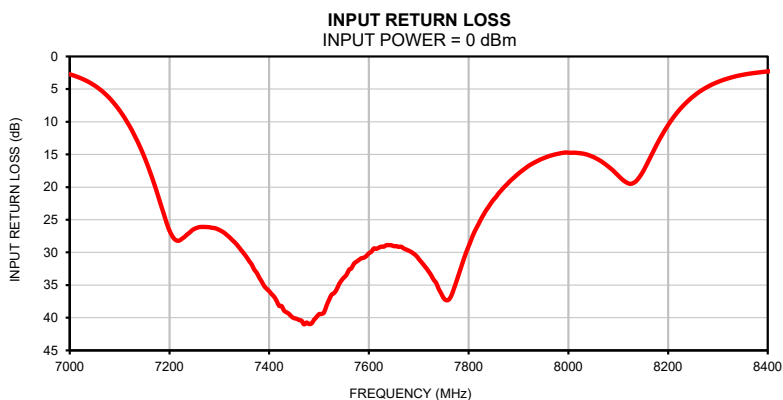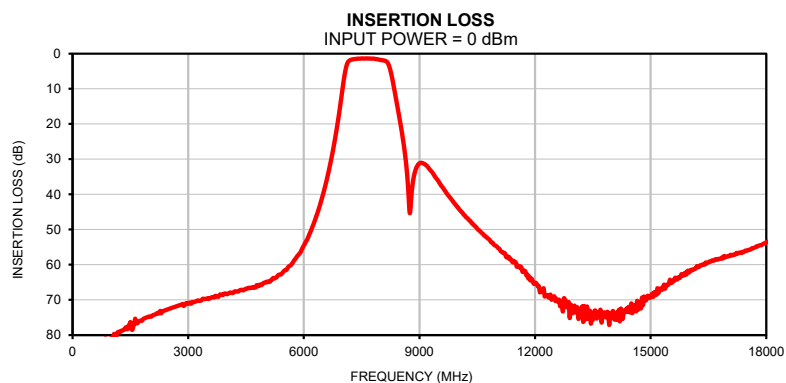

Outline Dimensions

UC2731

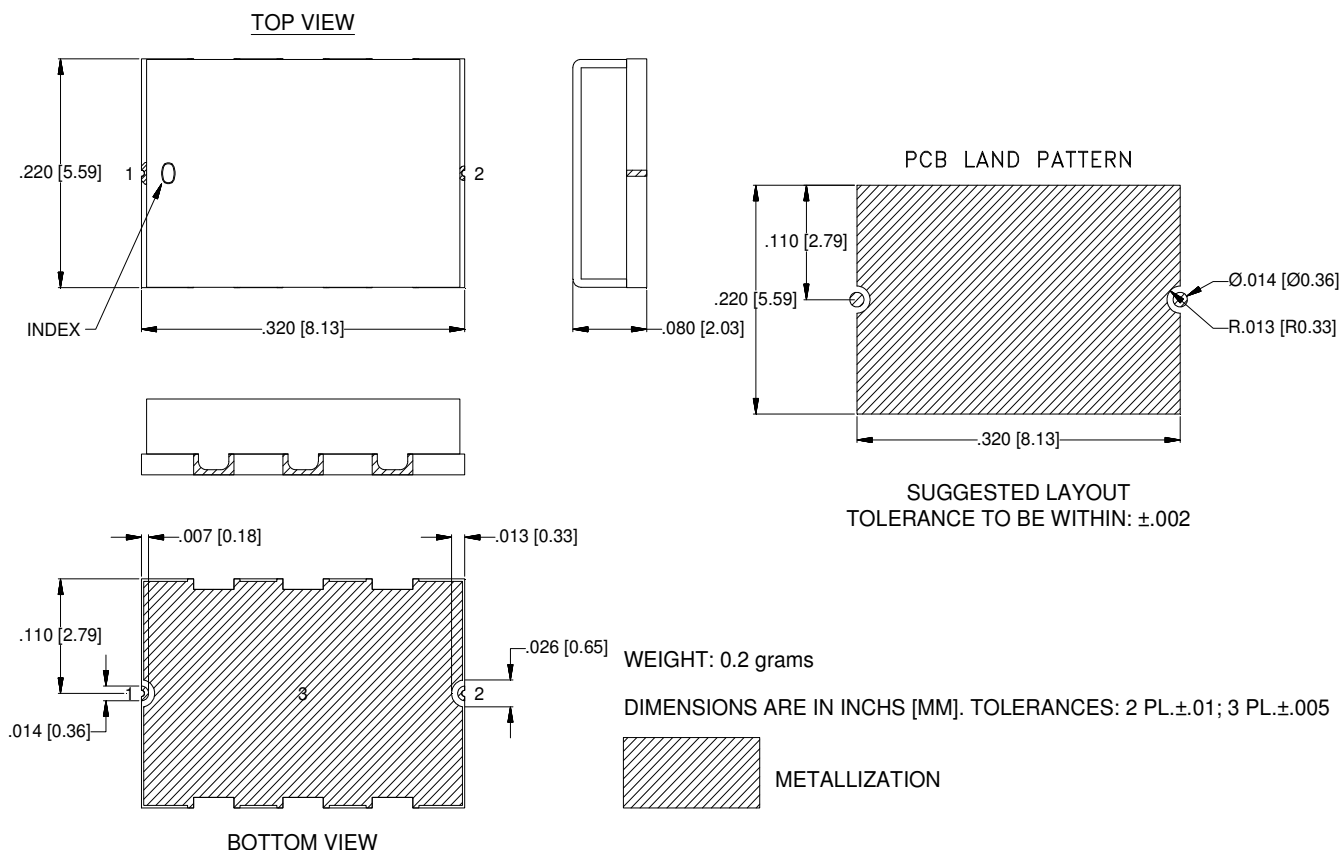

Notes:

1. Case material: Gold over Nickel over Annealed Stainless Steel.
2. Base: Ceramic
3. Termination finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Gold over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


RF/IF MICROWAVE COMPONENTS

THIRD ANGLE PROJECTION		REVISIONS				
	REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
	OR	ECO-007104	NEW RELEASE	MAR 21	DDR	VC
	A	ECO-010633	UPDATED AS PER CURRENT TEST BOARD	NOV 21	DDR	VC

SUGGESTED MOUNTING CONFIGURATION
FOR UC2731 CASE STYLE

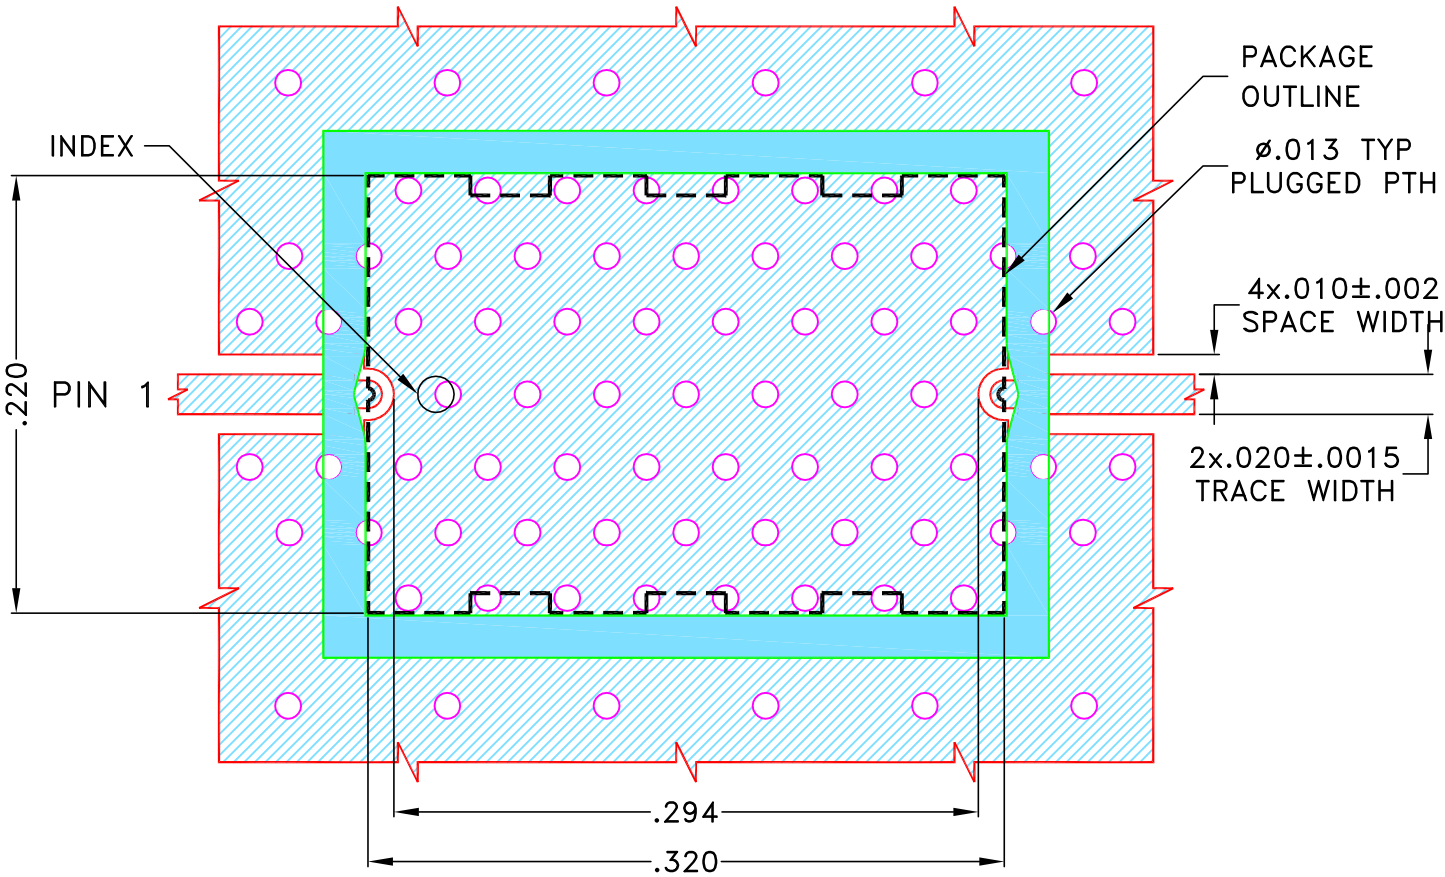


- NOTES:
- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.0010. COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK


UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	 Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235		
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	DRAWN	DDR	29 MAR 21			
	CHECKED	RR	29 MAR 21			
	APPROVED	NN	29 MAR 21			
 Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.				PL DWG, UC2731 C.S, 50 OHM, ABF		
		SIZE	CODE IDENT	DRAWING NO:	REV:	
		A	15542	98-PL-652	A	
		FILE:	98-PL-652	SCALE:	10:1	SHEET: 1 OF 1
		ASHEETA1.DWG REV:A DATE:01/12/95				

Evaluation Board and Circuit

TB-ABF-7R625G+

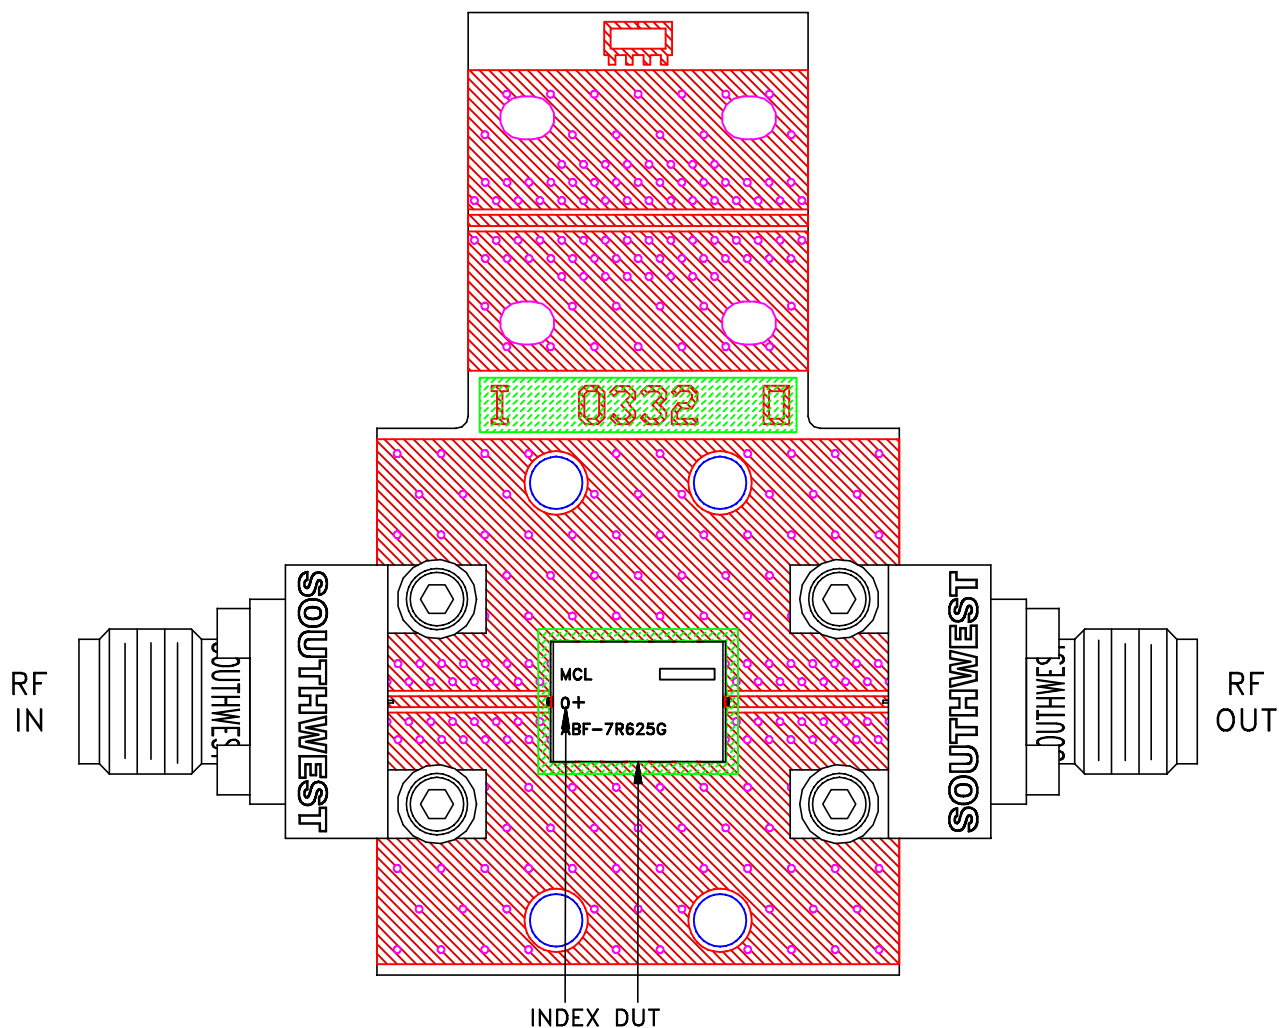

Schematic diagram

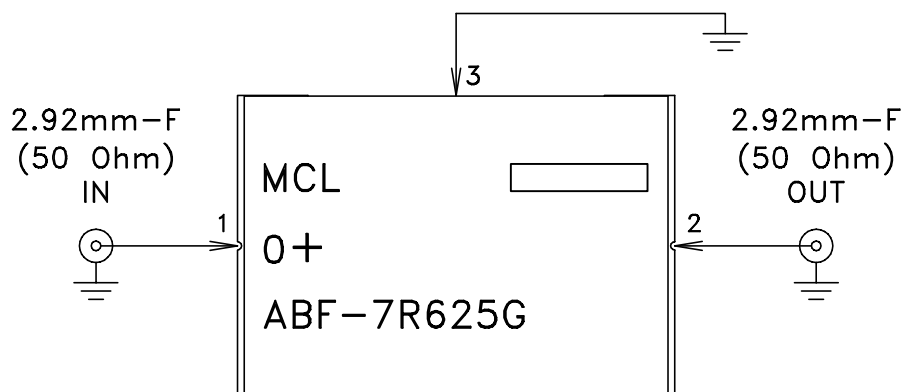

Notes:

1. PCB Material: ROGERS (R04350B) OR Equivalent, Dielectric Constant= 3.48 ± 0.05
Dielectric Thickness: $.010 \pm .001$ inch
2. 50 Ohm 2.92mm Female Connectors.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Thermal Shock	-55° to 125°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, Except +125°C