

Ceramic Bandpass Filter

BFCG-1952+

50Ω 16.80 to 21.0 GHz

The Big Deal

- Low Insertion Loss – Mid band 0.9dB typical
- Pick and place standard case style
- Small size 2.0mm x 1.25mm
- High quality distributed filter topology



CASE STYLE: GE0805C-13

Product Overview

The BFCG-1952+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance at mmWave frequencies, by utilizing a proprietary LTCC material system and distributed filter topology. The passband loss at 16.8-21GHz is as low as 0.9dB, with typical stopband rejections at 25dB up to 38.5GHz. This model handles up to 1W RF input power, and provides a wide operating temperature range from -55 to +125°C.

Key Features

Feature	Advantages
Proprietary mmWave compatible LTCC material system	Low loss and repeatable performance on a lot to lot basis up to mmWave frequencies.
Cost effective	LTCC is scalable technology that is cost effective due to ease of production in high quantities.
Small size (2.0mm x 1.25mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic Bandpass Filter

50Ω 16.8 to 21.0 GHz

BFCG-1952+



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-13

Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

Applications

- Satcom


+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications¹ at 25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—		18.8		GHz	
	Insertion Loss	F1-F2	16.8 - 21.0	—	0.9	2.5	dB
	Return Loss	F1-F2	16.8 - 21.0	—	15		dB
Stop Band, Lower	Insertion Loss	DC-F3	0.1 - 10.8	20	24	—	dB
		F3-F4	10.8 - 11.9	14	18	—	
Stop Band, Upper	Insertion Loss	F4-F5	26.3 - 28	13	18	—	dB
		F5-F6	28 - 38.5	20	25	—	

1. Measured on Mini-Circuits Test Board TB-BFCG-1952C+ with feedline losses removed by normalization of S12 and S21 traces to measurement of TB thru-line.

Functional Schematic




Maximum Ratings

Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input	1W at 25°C




Permanent damage may occur if any of these limits exceeded.

Typical Frequency Response

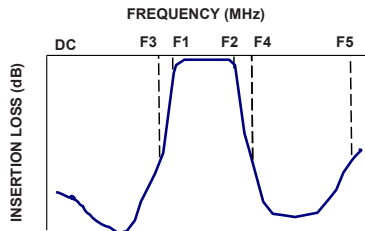

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
1000	54.73	0.46
5000	39.13	0.74
10800	23.96	1.25
11900	18.37	1.79
14000	11.12	2.02
15000	5.73	3.39
16800	0.82	15.00
18000	0.71	25.03
19000	0.75	20.83
20000	0.77	21.78
21000	0.95	20.44
22000	1.31	23.54
23000	4.60	5.60
24000	10.78	2.96
26300	21.58	3.02
30000	49.01	1.99
38500	26.95	4.36
45000	2.68	16.71
50000	5.38	8.10

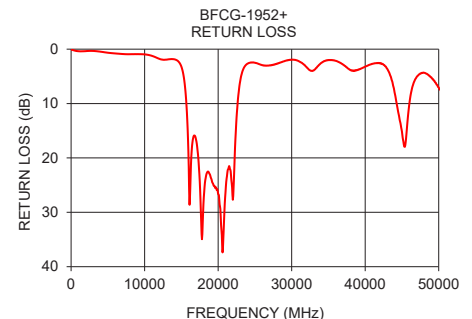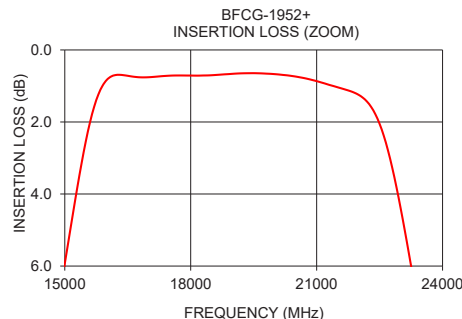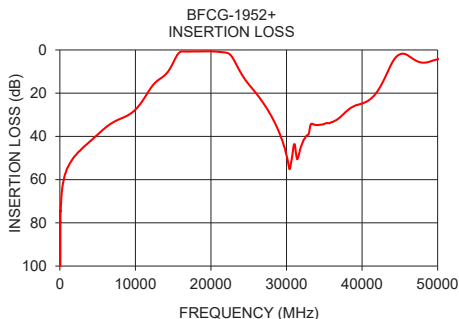

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. OR
ECO-004774
BFCG-1952+
WY/CP/AM
201022
Page 2 of 3

Pad Connections

INPUT	1
OUTPUT	3
GROUND	2

Product Marking: ME

**Demo Board MCL P/N: TB-BFCG-1952C+
Suggested PCB Layout (PL-689)**

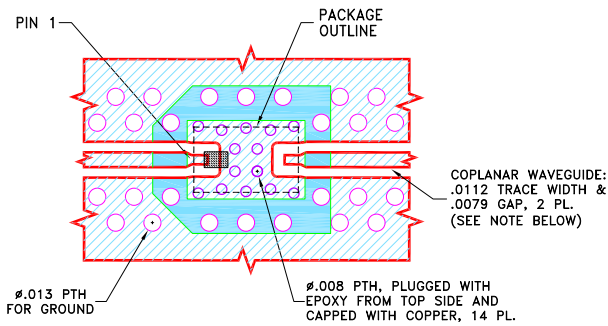


NOTES:

- TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS: .0066±.0007; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE GE0805C-13 RECOMMENDATIONS.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Drawing

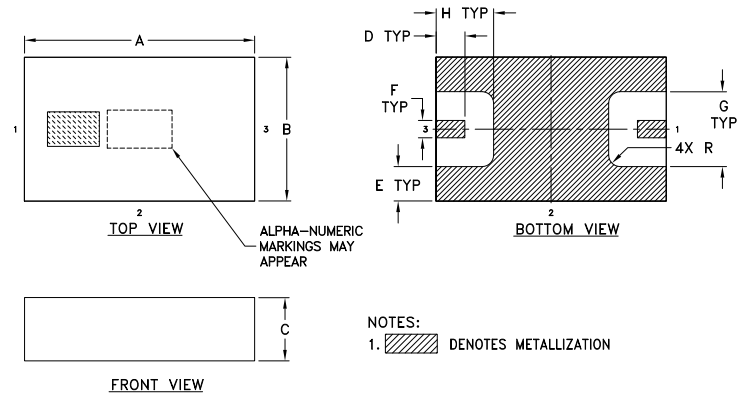

- NOTES:
1. DENOTES METALLIZATION

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	wt
.079	.049	.022	.010	.012	.006	.026	.020	grams
2.01	1.24	0.56	0.25	0.30	0.15	0.66	0.51	0.011

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp