



BALANCED TO UNBALANCED



RF Transformer

TC1.33-282X-4+

100 to 75Ω 5 to 2800 MHz

FEATURES

- Suitable for tin/lead and RoHS solder systems
- Wideband, 5 to 2800 MHz
- Balanced transmission line
- Good return loss, 20 dB typ. at 1 dB band
- Excellent amplitude unbalance, 0.3 dB typ.
- Aaqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT1521

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

Qorvo Part No.	Description
QPB8896	5-700 MHz, 25 dB Balanced Return Path Amplifier

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			1.33		Ohm
Frequency Range		5		2800	MHz
Insertion Loss*	5 - 2800		3.0		dB
	30 - 2000		2.0		
	50 - 1500		1.0		
Amplitude Unbalance	50 - 1500		0.3		dB
	30 - 2000		1.0		
Phase Unbalance	50 - 1500		6.0		Degree
	30 - 2000		6.0		


* Insertion Loss is referenced to mid-band loss, 1.0 dB typ. Measured in 75Ω system.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. K

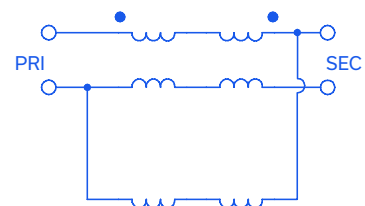

REV. B
 ECO-021661
 TC1.33-282X-4+
 MCL NY
 240501





BALANCED TO UNBALANCED



RF Transformer

TC1.33-282X-4+


100 to 75Ω 5 to 2800 MHz

PIN CONNECTIONS

Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2


PRODUCT MARKING: CM

OUTLINE DRAWING

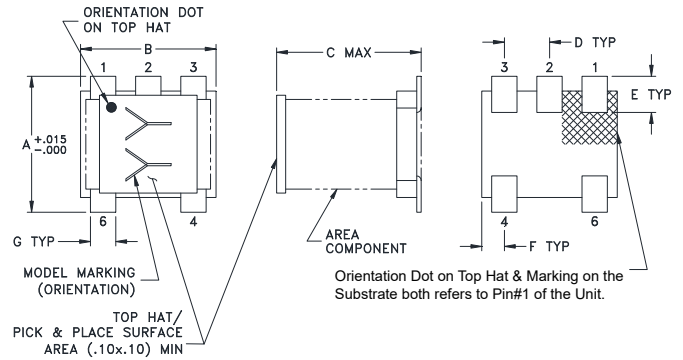

Top-hat total thickness: .013 inches MAX.

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76

Weight: 0.15 grams

TAPE & REEL INFORMATION: F17



BALANCED TO UNBALANCED



RF Transformer


TC1.33-282X-4+

Mini-Circuits

100 to 75Ω 5 to 2800 MHz

TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5.00	1.48	17.72	0.38	3.28
10.00	1.20	21.95	0.21	2.17
30.00	1.08	27.05	0.11	0.55
50.00	1.08	28.04	0.09	0.06
100.00	1.09	28.09	0.08	1.09
500.00	0.99	24.29	0.21	5.00
1000.00	0.97	22.66	0.07	6.34
1500.00	1.20	22.41	0.71	5.18
2000.00	1.64	21.22	1.49	1.64
2400.00	2.13	17.79	2.00	3.40
2800.00	2.76	13.83	2.31	10.70

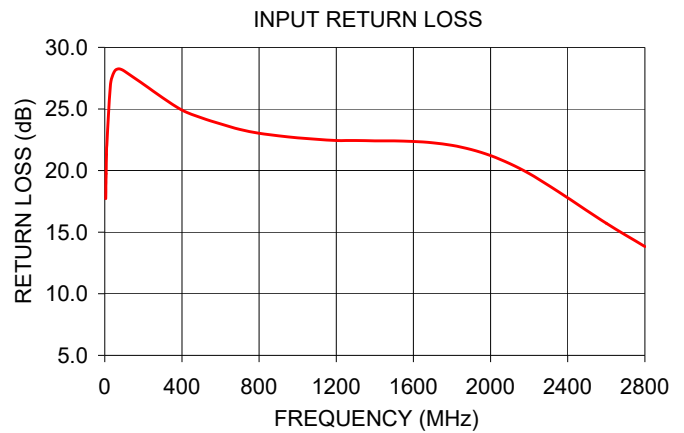

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

