



COAXIAL

Wideband Amplifier

ZVA-02653G+ ZVA-02653GX+

Mini-Circuits

50Ω 2 to 65 GHz Medium Power High Gain

THE BIG DEAL

- High gain 21 dB typ. over the entire operating band
- Good gain flatness, ±3.0 dB typ. up to 60 GHz
- +18 dBm Psat typ.
- Wide operating DC voltage, +10 to +15 V
- DC protected against over-voltage, reverse-voltage conditions



Generic photo used for illustration purposes only

APPLICATIONS

- 4G, 5G FR1, FR2 & FR2+
- Broadband Telecom
- Satellite Communications
- Test & Measurements
- WiFi6E (2.4, 5.8, 7.2 GHz)
- Aerospace & Defense

Model No.	ZVA-02653G+	ZVA-02653GX+
Option	With heatsink	Without heatsink
Case Style	WC3071-6	
Connector	1.85mm Female	

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' ZVA-02653G(X)+ is a coaxial ultra-wideband amplifier, operating from 2 to 65 GHz. This model operates over a single positive supply range of +10 to +15 V, allowing users to choose their desired operating voltage. Internal DC-DC conversion circuitry maintains constant efficiency over the full input voltage range. The amplifier incorporates several DC-protection features, such as over-voltage, reverse voltage and in-rush current, that protect the amplifier from damage if mishandled during operation. The wideband operation combined with medium output power makes this amplifier an ideal choice for testing and instrumentation applications.

KEY FEATURES

Features	Advantages
Ultra-wideband amplifier, 2 to 65 GHz	A single amplifier serves the need for applications including 5G bands, Broadband Telecom, SATCOM, Test & Instrumentation, etc.
Heatsink option	Model ZVA-02653G+ comes with a heatsink, keeping the amplifier cool to the touch during normal operation at room temperature
High gain Low VSWR Medium RF power	The amplifier provides 21 dB (typ.) of gain over the entire operating band, and can deliver over 60 mW of RF power making this amplifier an ideal choice for testing and instrumentation applications.
Wide Operating DC Supply Voltage	The device is capable of operating from +10 to +15 V with consistent DC power consumption
DC Protection – Over-voltage Reverse voltage In-rush Current	The internal DC circuitry allows the amplifier to be protected from external mishandling, that could lead to catastrophic failures in the field





COAXIAL

Wideband Amplifier

ZVA-02653G+ ZVA-02653GX+

Mini-Circuits

50Ω 2 to 65 GHz Medium Power High Gain

ELECTRICAL SPECIFICATIONS AT 25 °C BASEPLATE

Parameter	Condition (GHz)	ZVA-02653G+ ³ ZVA-02653GX+ ⁴			Units
		Min.	Typ.	Max.	
Frequency Range		2		65	GHz
Gain	2-60	18.0	21.0	-	dB
	60-65	-	19.0	-	
Output Power at 1dB compression	2-20	16.0	19.0	-	dBm
	20-40	13.5	16.5	-	
	40-60	9.0	14.0	-	
	60 - 65	-	9.50	-	
Saturated Output Power ⁷	2-20	17.0	19.5	-	dBm
	20-40	14.5	18.0	-	
	40-60	12.0	16.0	-	
	60 - 65	-	12.5	-	
Output IP3 (Output Power = +7 dBm/tone)	2-65	-	23.0	-	dBm
Input VSWR	2-65	-	1.5	2.1	:1
Output VSWR ¹	2-65	-	1.5	2.1	:1
Noise Figure	2-54	-	5.0	-	dB
Operating DC Voltage		+10	-	+15	V
Device Operating Current at +10 V		-	270	310	mA
Total Power Dissipation at +10 V		-	2.9 ²	-	W

1. Open and short-circuit loads are not recommended at the amplifier output. Ensure proper 50 Ohm load before turning the amplifier "ON".

2. Device operating power based on current when amplifier is in saturation.

3. For units with heatsink, limit ambient temperature to 50 °C.

4. For units without heatsink, limit the maximum baseplate temperature to 60 °C.

MAXIMUM RATINGS⁶

Parameter	Ratings
Operating Temperature	ZVA-02653G+ -40 °C to +50 °C Ambient ZVA-02653GX+ -40 °C to +60 °C Baseplate
Storage Temperature	-40 °C to +85 °C
RF Input Power ⁵ (CW)	+8 dBm
DC Operating Voltage	+16 V

5. Specified under matched load to 50 ohms.

6. Continuous operation is not recommended at these extremes. Permanent damage may occur if any of these limits are exceeded.

7. At Psat, Pout changes less than 0.1 dB for a 1 dB change in Pin.

DETERMINING MAXIMUM THERMAL RESISTANCE OF USERS' EXTERNAL HEAT SINK

MAXIMUM THERMAL RESISTANCE	= $\frac{\text{MAXIMUM OPERATING CASE TEMP} - \text{MAXIMUM USER AMBIENT TEMP}}{\text{POWER DISSIPATION}}$
Example:	<p>MAXIMUM OPERATING BASEPLATE TEMP = 60°C (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE)</p> <p>MAXIMUM USER AMBIENT TEMP = 50 °C (USER DEFINED)</p> <p>POWER DISSIPATION = 2.9 WATTS (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE)</p> <p>THEN MAXIMUM ALLOWABLE THERMAL RESISTANCE = 3.4 °C/W</p>





COAXIAL


Wideband Amplifier

ZVA-02653G+ ZVA-02653GX+


Mini-Circuits

50Ω 2 to 65 GHz Medium Power High Gain

OUTLINE DRAWING FOR MODELS WITH HEATSINK (ZVA-02653G+)

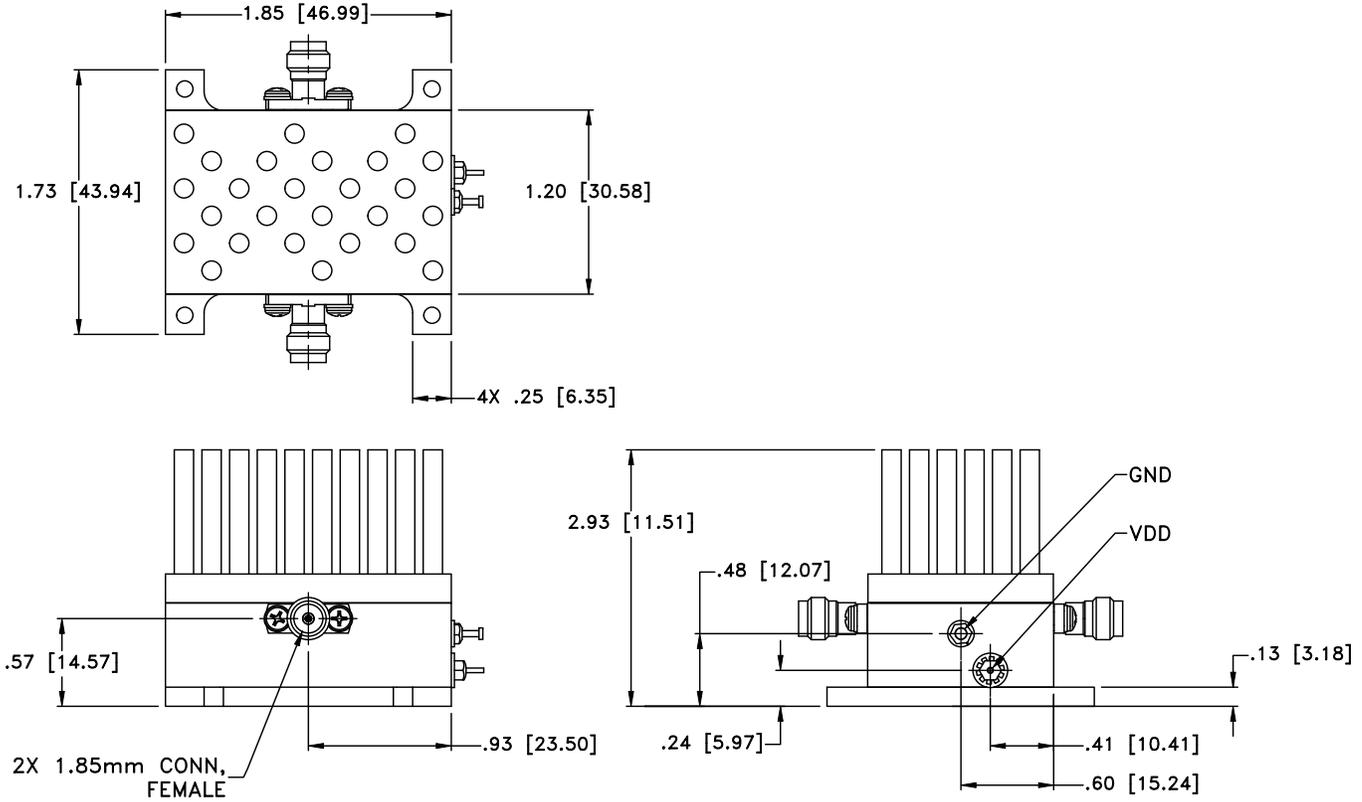

MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK (ZVA-02653GX+)

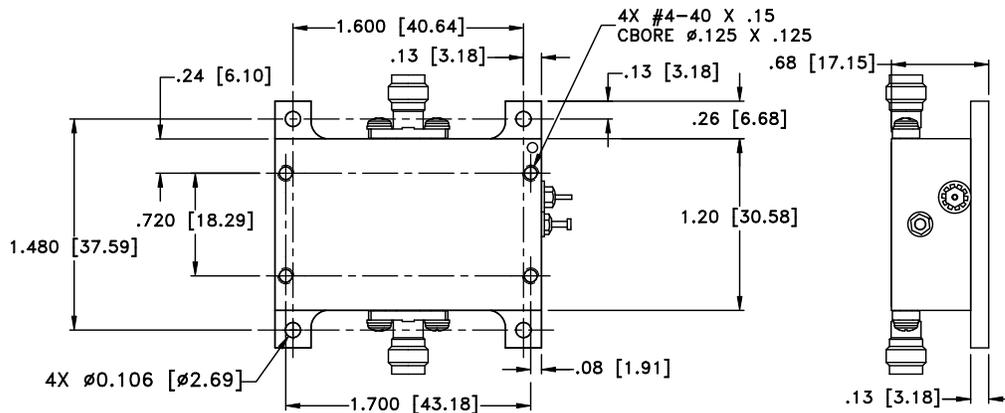

WT. GRAMS 90 grams; WITHOUT HEATSINK GRAMS 60 grams
Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03; 3 Pl. ±.015

Mini-Circuits



COAXIAL

Wideband Amplifier







ZVA-02653G+ ZVA-02653GX+

Mini-Circuits

50Ω 2 to 65 GHz Medium Power High Gain

TYPICAL PERFORMANCE DATA / GRAPHS

Frequency (GHz)	Gain (dB) 10V	Active Directivity (dB) 10V	VSWR (:1) 10V		Pout @ 1 dB Compression (dBm) 10V	Pout @ Saturation (dBm) 10V	Output IP3 (dBm) 10V	Noise Figure (dB) 10V
			IN	OUT				
2.0	22.0	67.8	1.4	1.2	19.4	20.0	31.5	6.3
6.0	23.4	88.7	1.4	1.3	19.1	20.1	30.6	5.7
10.0	22.3	72.5	1.6	1.2	18.7	19.7	29.2	5.6
14.0	21.3	67.4	1.5	1.6	18.0	19.0	27.8	5.0
18.0	21.5	67.0	1.3	1.2	18.0	19.3	27.4	5.0
22.0	22.0	57.6	1.3	1.2	17.7	18.8	25.9	4.8
26.0	21.7	49.2	1.2	1.4	17.2	18.2	25.2	4.7
30.0	22.0	45.3	1.3	1.2	16.6	18.1	24.0	4.5
34.0	21.6	47.4	1.2	1.5	16.1	17.6	23.6	4.9
38.0	21.4	43.0	1.6	1.8	15.4	17.2	23.1	5.0
42.0	21.2	41.5	1.7	1.7	14.8	17.1	22.3	5.4
46.0	21.5	37.3	1.2	1.3	15.3	17.3	22.4	5.4
50.0	20.8	38.2	1.4	1.3	13.9	16.1	20.5	5.7
54.0	21.7	34.6	1.5	1.6	13.5	16.1	20.5	5.7
58.0	21.5	32.5	1.9	1.1	11.8	14.6	18.8	-
62.0	20.9	31.5	1.4	1.6	10.8	13.5	18.1	-
65.0	17.3	35.7	1.9	1.2	7.2	10.1	16.7	-

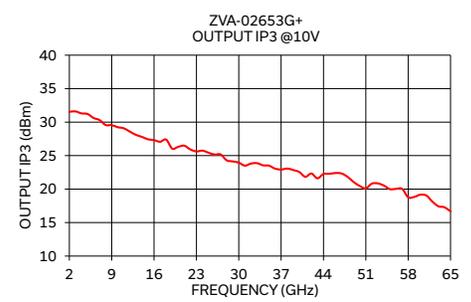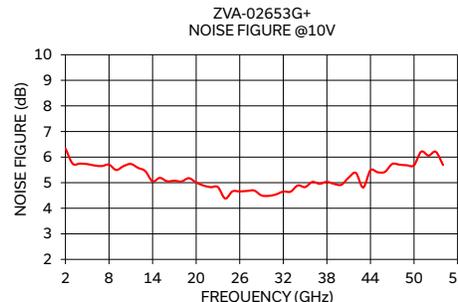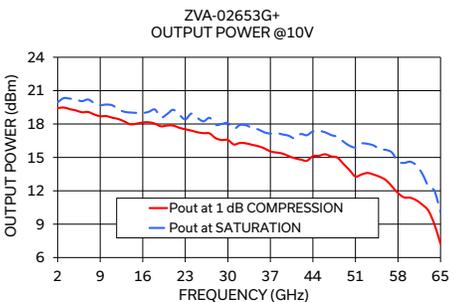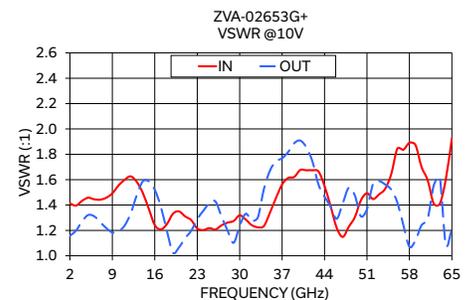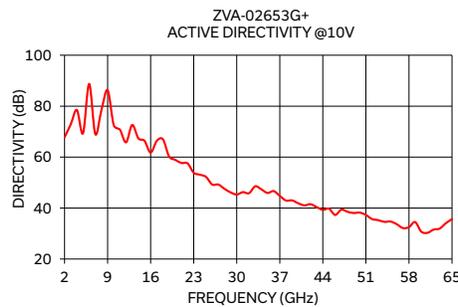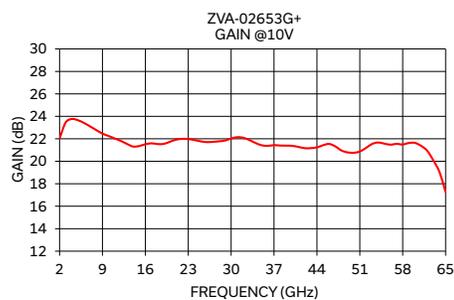

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

