Outline Dimensions

SH3437

6.00[152.4]

5.50[139.7]

TOP VIEW

2X LED INDICATOR

8X N-TYPE FEMALE CONNECTOR

2.75[69.9]

.88[22.4] TYP

.99[25.2] TYP

.91[23.1]

.88[22.4] TYP

.28[7.1]

3.30[83.8]

FRONT VIEW

FREQUENCY MARKING

PRODUCT MARKING

POWER

+24VDC USB

USE GROUNDED POWER ADAPTER ONLY

LAN

S/N LABEL

REAR VIEW

BRACKET OPTION
ONE SET OF 2 EACH

2X Ø.158[4.0]

1.50[38.1]

3.500[88.9]

4.00[101.6]

.25[6.4]

.41[10.4]

.837[21.3]

.18[4.6]

TOLERANCE: ±.005

3.500[88.9]

.375[9.5]

6.75[171.5]

BOTTOM VIEW

SHOWN WITH RUBBER FEET REMOVED AND BRACKETS INSTALLED

INSTRUCTIONS FOR MOUNTING BRACKETS:
TOOL REQUIRED: PHILLIPS HEAD SCREWDRIVER
STEP 1: REMOVE RUBBER FEET FROM THE BOTTOM OF THE UNIT, DO NOT DISCARD THE FASTENERS.
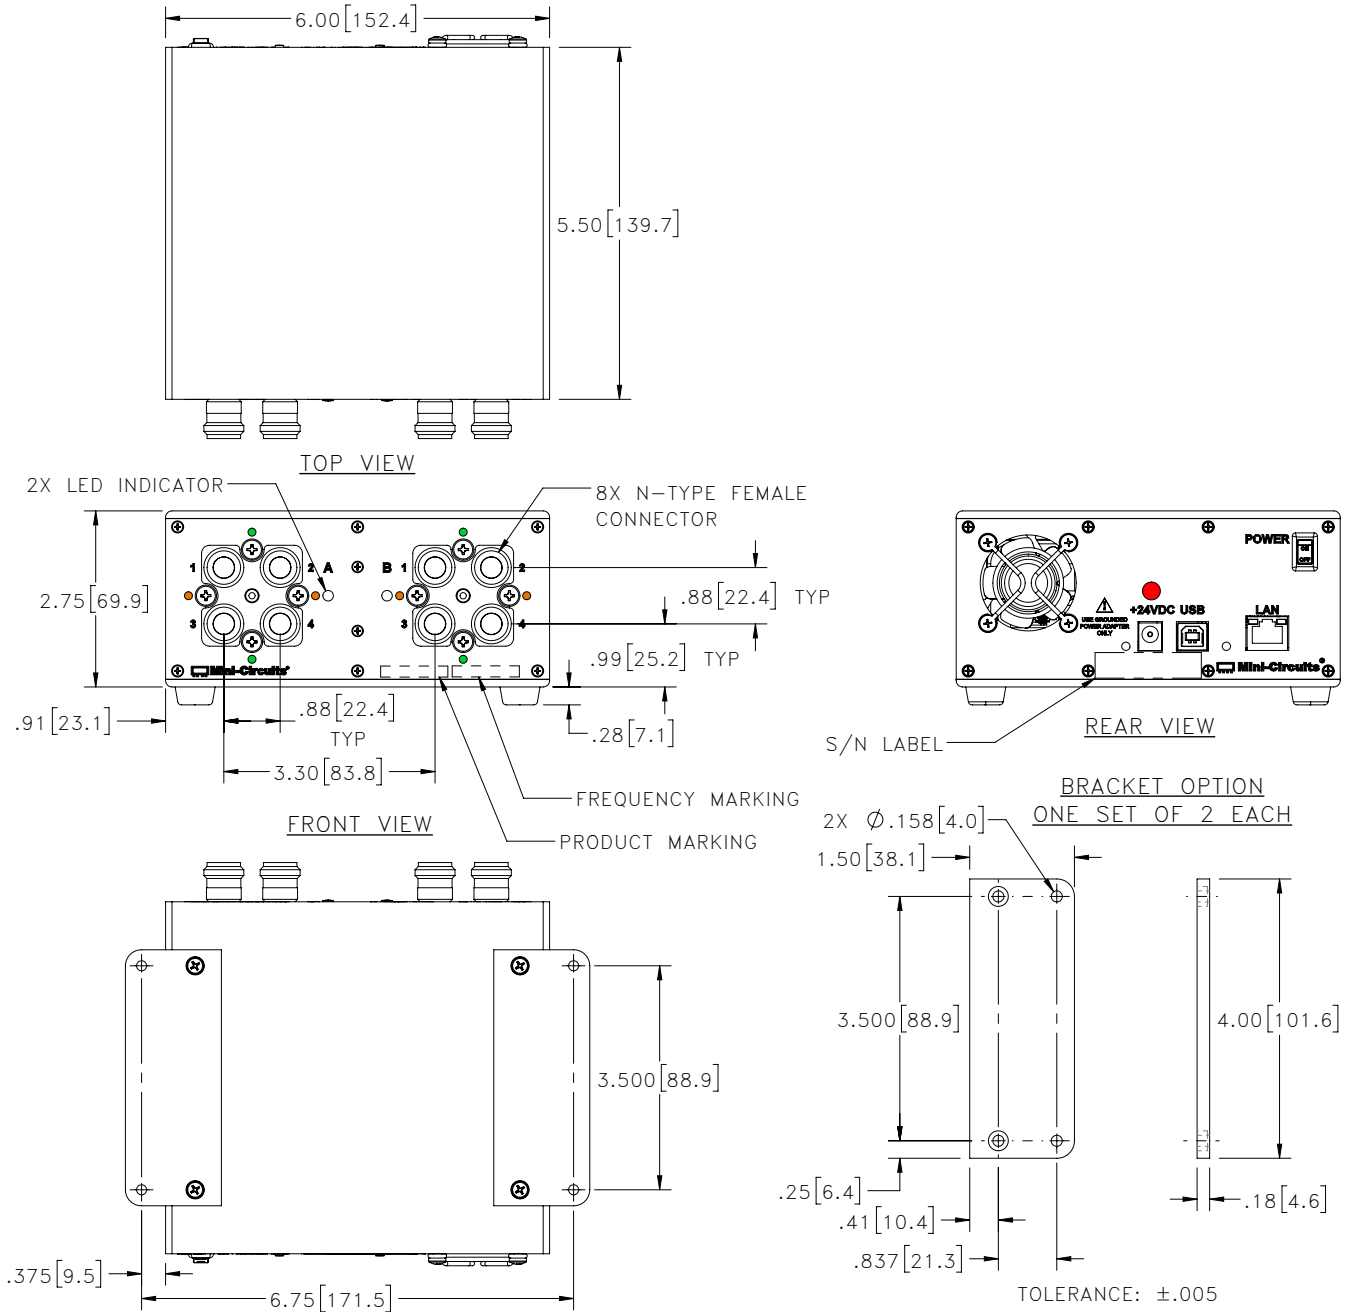STEP 2: MOUNT THE BRACKETS WITH THE FASTENERS REMOVED IN STEP 1, USING THE COUNTER BORE HOLES IN THE BRACKET.

Notes:
1. Case material: Aluminum (with protective coating to prevent corrosion).
2. Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03 inch; 3 Pl. ±.015 inch.
3. Weight: 1300 grams.
4. Marking may contain other features or characters for internal lot control.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com