

Frequency Mixer

MWJ-ED14276/1

Level 17 (LO Power + 17 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.




CASE STYLE : 99-01-1410

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	324		474	MHz
	RF (f _L to f _U)	100		250	MHz
	IF	30		300	MHz
Conversion Loss	Total Range		8		dB
LO-RF Isolation			48		dB
LO-IF Isolation			47		dB
Input IP3			+31		dBm
1 dB Compression			+20		dBm

MAXIMUM RATINGS	
Operating Temperature	-45°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	13
RF	21
IF	2
OPEN	10
GROUND	1,3,4,5,6,7,8,9,11,12,14,15,16,17,18,19,20,22

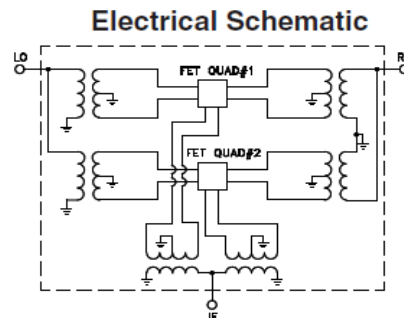

Frequency Mixer

MWJ-ED14276/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=224MHz (dB)		
		@LO (dBm)		
		+15	+17	+19
10.1	234.1	7.89	7.67	7.63
25.1	249.1	8.23	8.06	7.97
40.1	264.1	8.10	7.94	7.81
55.1	279.1	8.13	7.98	7.89
70.1	294.1	8.29	8.16	8.06
85.1	309.1	8.25	8.13	8.04
100.1	324.1	8.24	8.16	8.06
115.1	339.1	8.08	7.98	7.89
135.1	359.1	7.96	7.86	7.77
141.1	365.1	7.95	7.85	7.78
144.1	368.1	7.97	7.86	7.79
147.1	371.1	7.97	7.88	7.80
150.1	374.1	7.98	7.90	7.82
153.1	377.1	8.00	7.90	7.84
156.1	380.1	8.07	7.99	7.92
159.1	383.1	8.09	8.00	7.94
162.1	386.1	8.09	8.00	7.94
165.1	389.1	8.09	8.01	7.95
168.1	392.1	8.11	8.03	7.94
171.1	395.1	8.11	8.05	7.98
175.1	399.1	8.17	8.08	8.02
190.1	414.1	8.26	8.18	8.11
205.1	429.1	8.22	8.13	8.05
220.1	444.1	8.22	8.11	8.02
235.1	459.1	8.04	7.94	7.85
250.1	474.1	8.13	8.02	7.93
265.1	489.1	8.32	8.19	8.09
280.1	504.1	8.41	8.28	8.18
295.1	519.1	8.66	8.53	8.43
310.1	534.1	8.89	8.76	8.66
325.1	549.1	9.16	9.04	8.94
340.1	564.1	9.44	9.31	9.21
355.1	579.1	9.65	9.50	9.39
370.1	594.1	9.82	9.65	9.54
385.1	609.1	9.98	9.81	9.68
400.1	624.1	9.98	9.80	9.65
415.1	639.1	9.90	9.72	9.57
430.1	654.1	9.72	9.52	9.36
445.1	669.1	9.56	9.36	9.20
465.1	689.1	9.55	9.32	9.14

RF (IN) (MHz)	LO (MHz)	IP-3 INPUT (dBm)		
		@LO (dBm)		
		+15	+17	+19
10.1	234.1	22.47	24.77	27.03
25.1	249.1	23.01	25.35	27.55
40.1	264.1	25.10	27.34	29.06
55.1	279.1	25.75	27.79	29.36
70.1	294.1	26.89	28.56	29.73
85.1	309.1	28.61	30.05	31.50
100.1	324.1	29.08	30.32	31.87
115.1	339.1	29.80	31.01	32.34
135.1	359.1	30.28	31.86	33.48
141.1	365.1	30.27	31.51	32.65
144.1	368.1	30.23	31.59	33.02
147.1	371.1	30.17	31.52	32.88
150.1	374.1	30.22	31.47	32.97
153.1	377.1	30.09	31.42	32.90
156.1	380.1	30.58	31.66	33.30
159.1	383.1	30.66	32.08	33.54
162.1	386.1	31.07	32.36	33.63
165.1	389.1	30.95	32.49	34.08
168.1	392.1	31.31	32.66	34.30
171.1	395.1	31.57	32.93	34.23
175.1	399.1	31.73	32.97	34.34
190.1	414.1	31.66	33.10	34.37
205.1	429.1	31.47	33.23	34.65
220.1	444.1	30.99	32.75	34.19
235.1	459.1	30.56	32.21	33.80
250.1	474.1	29.33	30.97	32.81
265.1	489.1	27.95	29.73	31.34
280.1	504.1	28.47	30.14	31.80
295.1	519.1	28.37	29.96	31.33
310.1	534.1	28.84	31.20	32.88
325.1	549.1	27.64	30.94	33.64
340.1	564.1	24.91	27.33	29.61
355.1	579.1	23.06	25.03	26.86
370.1	594.1	22.16	24.03	25.60
385.1	609.1	21.95	23.69	25.42
400.1	624.1	21.98	23.81	25.84
415.1	639.1	21.81	23.69	25.78
430.1	654.1	21.74	23.59	25.72
445.1	669.1	22.11	24.11	26.08
465.1	689.1	21.79	23.87	26.11

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN= +20dBm (dB)		
		@LO (dBm)		
		+15	+17	+19
10.1	234.1	-3.75	-2.70	-1.77
25.1	249.1	-2.97	-2.03	-1.21
40.1	264.1	-2.18	-1.38	-0.76
55.1	279.1	-1.70	-1.01	-0.56
70.1	294.1	-1.42	-0.83	-0.49
85.1	309.1	-1.11	-0.65	-0.39
100.1	324.1	-0.84	-0.51	-0.31
115.1	339.1	-0.55	-0.34	-0.21
135.1	359.1	-0.40	-0.24	-0.16
141.1	365.1	-0.37	-0.22	-0.14
144.1	368.1	-0.37	-0.22	-0.14
147.1	371.1	-0.37	-0.23	-0.15
150.1	374.1	-0.36	-0.22	-0.14
153.1	377.1	-0.36	-0.22	-0.14
156.1	380.1	-0.35	-0.22	-0.14
159.1	383.1	-0.36	-0.21	-0.13
162.1	386.1	-0.34	-0.20	-0.13
165.1	389.1	-0.34	-0.20	-0.12
168.1	392.1	-0.33	-0.20	-0.12
171.1	395.1	-0.33	-0.20	-0.12
175.1	399.1	-0.32	-0.19	-0.12
190.1	414.1	-0.34	-0.20	-0.12
205.1	429.1	-0.40	-0.25	-0.15
220.1	444.1	-0.48	-0.30	-0.19
235.1	459.1	-0.54	-0.34	-0.21
250.1	474.1	-0.59	-0.36	-0.23
265.1	489.1	-0.69	-0.43	-0.27
280.1	504.1	-0.92	-0.57	-0.37
295.1	519.1	-1.19	-0.75	-0.49
310.1	534.1	-1.38	-0.87	-0.57
325.1	549.1	-1.42	-0.90	-0.60
340.1	564.1	-1.46	-0.94	-0.63
355.1	579.1	-1.66	-1.10	-0.74
370.1	594.1	-2.07	-1.40	-0.94
385.1	609.1	-2.54	-1.74	-1.18
400.1	624.1	-2.85	-1.99	-1.32
415.1	639.1	-2.90	-2.01	-1.33
430.1	654.1	-2.83	-1.94	-1.27
445.1	669.1	-2.86	-1.95	-1.26
465.1	689.1	-3.43	-2.42	-1.59

Frequency Mixer

MWJ-ED14276/1

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=155.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=135.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=175.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
75.0	80.1	9.84	10.0	145.1	9.50	90.0	85.1	9.69
72.0	83.1	9.61	15.0	150.1	8.95	89.0	86.1	9.67
69.0	86.1	9.52	20.0	155.1	8.91	88.0	87.1	9.60
65.0	90.1	9.41	25.0	160.1	8.75	87.0	88.1	9.51
62.0	93.1	9.44	35.0	170.1	8.58	86.0	89.1	9.49
59.0	96.1	9.44	40.0	175.1	8.47	84.0	91.1	9.46
55.0	100.1	9.45	45.0	180.1	8.44	83.0	92.1	9.44
52.0	103.1	9.45	55.0	190.1	8.41	82.0	93.1	9.43
49.0	106.1	9.44	60.0	195.1	8.48	81.0	94.1	9.43
45.0	110.1	9.36	65.0	200.1	8.47	79.0	96.1	9.43
42.0	113.1	9.30	75.0	210.1	8.24	78.0	97.1	9.43
39.0	116.1	9.23	80.0	215.1	8.24	77.0	98.1	9.42
35.0	120.1	9.10	85.0	220.1	8.19	76.0	99.1	9.42
32.0	123.1	8.99	95.0	230.1	8.22	74.0	101.1	9.42
29.0	126.1	8.87	100.0	235.1	8.25	72.0	103.1	9.51
25.0	130.1	8.80	105.0	240.1	8.25	70.0	105.1	9.49
22.0	133.1	8.76	110.0	245.1	8.24	68.0	107.1	9.47
19.0	136.1	8.71	120.0	255.1	8.06	66.0	109.1	9.46
15.0	140.1	8.80	125.0	260.1	7.97	62.0	113.1	9.38
12.0	143.1	9.07	130.0	265.1	7.93	60.0	115.1	9.33
10.0	165.1	9.40	140.0	275.1	8.05	58.0	117.1	9.28
25.0	180.1	8.52	145.0	280.1	8.08	56.0	119.1	9.21
40.0	195.1	8.46	150.0	285.1	8.09	52.0	123.1	9.07
60.0	215.1	8.18	160.0	295.1	8.06	50.0	125.1	9.01
75.0	230.1	8.17	165.0	300.1	8.05	48.0	127.1	8.95
95.0	250.1	8.20	170.0	305.1	8.01	46.0	129.1	8.89
110.0	265.1	8.08	180.0	315.1	7.95	42.0	133.1	8.82
130.0	285.1	7.99	185.0	320.1	7.94	40.0	135.1	8.80
145.0	300.1	7.92	190.0	325.1	7.91	38.0	137.1	8.79
160.0	315.1	7.99	195.0	330.1	7.90	36.0	139.1	8.79
180.0	335.1	8.03	205.0	340.1	7.86	34.0	141.1	8.79
195.0	350.1	7.95	210.0	345.1	7.84	30.0	145.1	8.85
215.0	370.1	7.96	215.0	350.1	7.83	28.0	147.1	8.84
230.0	385.1	7.89	225.0	360.1	7.86	26.0	149.1	8.82
243.2	398.3	7.93	230.0	365.1	7.88	24.0	151.1	8.89
251.4	406.5	7.95	235.0	370.1	7.88	20.0	155.1	8.92
259.5	414.6	7.96	245.0	380.1	7.88	18.0	157.1	8.85
270.5	425.6	7.95	250.0	385.1	7.90	16.0	159.1	8.96
278.6	433.7	7.93	255.0	390.1	7.93	14.0	161.1	9.02
289.5	444.6	7.97	265.0	400.1	7.90	10.0	165.1	9.36

Frequency Mixer

MWJ-ED14276/1

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+15	+17	+19	+15	+17	+19
234.1	58.67	58.41	58.26	56.18	56.02	55.78
249.1	57.08	56.65	56.35	54.94	54.59	54.31
264.1	56.28	56.04	55.83	54.23	53.99	53.81
279.1	54.45	54.22	54.06	52.78	52.50	52.33
294.1	52.28	52.01	51.78	51.06	50.66	50.41
309.1	51.72	51.51	51.41	50.34	50.12	49.94
324.1	51.10	50.96	50.84	49.66	49.45	49.24
339.1	49.81	49.69	49.58	48.42	48.20	48.02
359.1	49.08	48.98	48.93	47.35	47.14	46.97
365.1	48.60	48.48	48.44	47.06	46.80	46.64
368.1	48.33	48.25	48.23	46.98	46.76	46.54
371.1	48.05	47.95	47.93	46.95	46.69	46.53
374.1	47.74	47.70	47.66	46.88	46.66	46.50
377.1	47.57	47.51	47.48	46.82	46.63	46.44
380.1	47.47	47.44	47.38	46.71	46.52	46.33
383.1	47.44	47.40	47.41	46.61	46.42	46.25
386.1	47.43	47.37	47.39	46.58	46.39	46.22
389.1	47.42	47.38	47.39	46.58	46.42	46.26
392.1	47.50	47.49	47.49	46.66	46.51	46.31
395.1	47.61	47.59	47.59	46.76	46.58	46.47
399.1	47.71	47.68	47.69	46.94	46.73	46.63
414.1	47.89	47.86	47.84	47.09	46.94	46.81
429.1	47.82	47.78	47.78	47.27	47.15	47.03
444.1	48.70	48.63	48.64	47.81	47.68	47.61
459.1	48.95	48.86	48.82	48.34	48.23	48.12
474.1	49.08	48.96	48.91	48.86	48.70	48.57
489.1	50.08	50.01	49.93	49.24	49.03	48.85
504.1	50.77	50.61	50.52	48.97	48.71	48.57
519.1	51.20	51.02	50.88	49.03	48.72	48.44
534.1	51.61	51.33	51.18	49.64	49.19	48.88
549.1	52.00	51.60	51.26	51.14	50.76	50.45
564.1	50.90	50.37	49.93	51.60	51.22	50.93
579.1	49.08	48.58	48.18	51.46	51.22	50.99
594.1	47.65	47.22	46.81	50.65	50.46	50.37
609.1	46.55	46.09	45.70	49.90	49.75	49.67
624.1	47.05	46.61	46.29	50.12	50.05	50.04
639.1	47.86	47.40	47.02	51.28	51.30	51.34
654.1	47.98	47.57	47.27	53.11	53.29	53.41
669.1	49.30	49.00	48.86	56.02	56.21	56.51
689.1	52.08	51.66	51.36	59.94	59.77	59.27

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+15	+17	+19
10.1	234.1	46.67	41.26	42.56
25.1	249.1	48.54	51.69	49.01
40.1	264.1	42.94	42.31	42.44
55.1	279.1	46.96	49.55	49.77
70.1	294.1	48.51	49.54	48.70
85.1	309.1	47.70	46.70	46.32
100.1	324.1	49.17	50.74	49.98
115.1	339.1	49.73	50.80	50.31
135.1	359.1	49.69	50.30	49.89
141.1	365.1	49.70	49.94	50.49
144.1	368.1	50.23	50.08	50.19
147.1	371.1	49.75	50.54	49.85
150.1	374.1	50.05	50.14	50.52
153.1	377.1	50.22	49.92	51.48
156.1	380.1	50.02	49.86	50.78
159.1	383.1	49.57	49.75	50.48
162.1	386.1	49.29	49.63	50.21
165.1	389.1	49.38	49.48	50.06
168.1	392.1	49.06	49.06	49.93
171.1	395.1	49.07	48.81	49.58
175.1	399.1	48.38	48.84	48.98
190.1	414.1	47.36	47.59	47.59
205.1	429.1	46.38	46.13	46.31
220.1	444.1	46.62	46.42	46.39
235.1	459.1	46.92	46.27	46.78
250.1	474.1	46.61	46.27	45.75
265.1	489.1	47.71	47.40	47.06
280.1	504.1	47.77	47.96	47.68
295.1	519.1	47.60	47.11	46.73
310.1	534.1	49.03	48.99	48.96
325.1	549.1	49.18	49.34	49.62
340.1	564.1	48.30	48.51	48.58
355.1	579.1	46.04	45.73	45.50
370.1	594.1	43.90	43.35	42.89
385.1	609.1	42.06	41.66	41.12
400.1	624.1	39.79	39.08	38.31
415.1	639.1	38.45	37.73	37.06
430.1	654.1	38.18	37.67	37.08
445.1	669.1	38.04	37.49	36.99
465.1	689.1	38.35	37.85	37.40



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



REV. X1

MWJ-ED14276/1

6/7/2011

Page 3 of 5

IF/RF MICROWAVE COMPONENTS

Frequency Mixer

MWJ-ED14276/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=399.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+15	+17	+19		+15	+17	+19		+15	+17	+19
10.1	234.1	1.27	1.39	1.40	234.1	11.72	11.72	11.70	10.1	1.61	1.67	1.62
25.1	249.1	1.31	1.32	1.35	249.1	10.56	10.53	10.52	15.1	1.61	1.65	1.69
40.1	264.1	1.32	1.40	1.43	264.1	9.31	9.29	9.27	25.1	1.65	1.67	1.73
55.1	279.1	1.37	1.42	1.46	279.1	8.10	8.08	8.06	35.1	1.65	1.69	1.73
70.1	294.1	1.41	1.44	1.48	294.1	6.92	6.90	6.87	45.1	1.63	1.68	1.73
85.1	309.1	1.43	1.46	1.50	309.1	5.72	5.70	5.68	55.1	1.63	1.68	1.72
100.1	324.1	1.45	1.49	1.52	324.1	4.63	4.61	4.59	65.1	1.64	1.68	1.72
115.1	339.1	1.49	1.54	1.57	339.1	3.63	3.61	3.59	75.1	1.63	1.67	1.72
135.1	359.1	1.55	1.58	1.61	359.1	2.52	2.51	2.49	85.1	1.62	1.66	1.70
141.1	365.1	1.56	1.59	1.62	365.1	2.25	2.24	2.22	95.1	1.61	1.65	1.69
144.1	368.1	1.56	1.59	1.62	368.1	2.12	2.11	2.10	105.1	1.66	1.70	1.74
147.1	371.1	1.56	1.60	1.63	371.1	2.00	1.99	1.98	115.1	1.69	1.73	1.77
150.1	374.1	1.58	1.60	1.64	374.1	1.89	1.88	1.87	125.1	1.68	1.72	1.76
153.1	377.1	1.58	1.61	1.64	377.1	1.79	1.78	1.77	135.1	1.66	1.69	1.74
156.1	380.1	1.59	1.62	1.65	380.1	1.69	1.68	1.67	140.1	1.66	1.69	1.73
159.1	383.1	1.59	1.62	1.65	383.1	1.60	1.59	1.59	150.1	1.67	1.71	1.74
162.1	386.1	1.59	1.62	1.65	386.1	1.52	1.52	1.51	160.1	1.68	1.71	1.75
165.1	389.1	1.59	1.62	1.65	389.1	1.45	1.45	1.44	170.1	1.65	1.68	1.72
168.1	392.1	1.60	1.62	1.65	392.1	1.40	1.39	1.39	180.1	1.65	1.69	1.72
171.1	395.1	1.60	1.63	1.65	395.1	1.36	1.35	1.35	190.1	1.68	1.72	1.75
175.1	399.1	1.61	1.63	1.66	399.1	1.33	1.33	1.33	200.1	1.70	1.73	1.76
190.1	414.1	1.61	1.64	1.66	414.1	1.49	1.50	1.51	210.1	1.70	1.73	1.77
205.1	429.1	1.63	1.66	1.68	429.1	1.92	1.94	1.95	220.1	1.69	1.72	1.75
220.1	444.1	1.66	1.69	1.71	444.1	2.48	2.50	2.52	229.1	1.70	1.73	1.76
235.1	459.1	1.67	1.69	1.71	459.1	3.15	3.18	3.20	239.1	1.72	1.76	1.78
250.1	474.1	1.69	1.70	1.72	474.1	3.88	3.91	3.94	249.1	1.75	1.78	1.81
265.1	489.1	1.71	1.72	1.74	489.1	4.66	4.69	4.72	259.1	1.74	1.77	1.80
280.1	504.1	1.73	1.74	1.75	504.1	5.52	5.55	5.58	264.1	1.73	1.76	1.79
295.1	519.1	1.76	1.77	1.78	519.1	6.28	6.31	6.34	274.1	1.73	1.76	1.78
310.1	534.1	1.80	1.81	1.82	534.1	7.07	7.09	7.12	284.1	1.76	1.78	1.81
325.1	549.1	1.85	1.85	1.86	549.1	7.67	7.69	7.70	294.1	1.78	1.80	1.82
340.1	564.1	1.90	1.90	1.91	564.1	8.24	8.24	8.24	304.1	1.77	1.79	1.81
355.1	579.1	1.90	1.90	1.90	579.1	8.67	8.66	8.66	314.1	1.76	1.78	1.80
370.1	594.1	1.92	1.91	1.91	594.1	9.19	9.18	9.18	324.1	1.78	1.80	1.82
385.1	609.1	1.93	1.92	1.91	609.1	9.69	9.69	9.68	334.1	1.81	1.83	1.85
400.1	624.1	1.92	1.90	1.89	624.1	10.26	10.26	10.26	344.1	1.82	1.84	1.86
415.1	639.1	1.96	1.94	1.92	639.1	10.93	10.93	10.92	354.1	1.81	1.82	1.84
430.1	654.1	1.99	1.96	1.94	654.1	11.44	11.43	11.39	364.1	1.83	1.84	1.86
445.1	669.1	2.05	2.02	2.00	669.1	12.05	12.02	11.97	374.1	1.87	1.88	1.89
465.1	689.1	2.13	2.09	2.06	689.1	12.68	12.65	12.60	384.1	1.89	1.90	1.91



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. X1

MWJ-ED14276/1

6/7/2011

Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	20.38	20.42	21.11	30.08	34.01	43.63	41.61	53.13	53.59	54.90
1	---	42.29	---	47.55	12.01	45.15	18.33	53.05	26.80	47.81	42.52	46.72
2	113.89	73.10	57.46	61.74	64.53	60.65	66.36	62.08	57.77	60.06	57.86	63.49
3	111.93	111.16	77.44	98.46	75.50	91.63	74.11	90.83	77.17	95.28	81.47	100.88
4	111.21	113.61	119.11	112.13	117.22	111.68	117.49	109.31	120.87	117.20	112.88	111.65
5	114.13	120.00	104.91	118.37	107.18	120.63	104.04	121.48	107.12	118.43	111.93	119.01
6	113.52	119.12	119.50	118.55	117.55	120.09	120.59	121.31	119.44	120.90	118.08	120.04
7	114.15	120.84	121.24	118.53	119.43	118.61	116.28	121.44	119.48	119.87	121.16	117.23
8	112.00	118.66	122.39	117.31	121.71	116.26	121.97	120.64	121.41	121.03	119.81	117.01
9	114.94	122.10	121.95	121.30	117.93	121.67	119.33	119.73	120.09	119.71	120.12	119.97
10	114.02	119.78	119.97	120.14	117.58	120.33	114.46	120.16	119.67	120.34	120.57	118.85
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 155 MHz; 0 dBm.
LO IN: 379 MHz; +17.00 dBm
IF OUT: 224 MHz; -7.93 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	28.74	31.36	34.02	45.01	42.21	45.31	43.44	46.93	45.16	48.64
1	---	42.31	---	47.53	12.15	45.09	18.64	51.95	27.37	47.82	44.22	47.28
2	101.85	62.96	47.21	51.71	54.51	50.78	56.73	52.29	47.72	50.37	48.08	54.21
3	113.13	88.50	57.14	77.08	54.88	70.19	53.30	69.26	56.44	73.24	60.36	81.06
4	113.01	94.87	87.33	100.86	87.43	98.28	97.08	88.12	96.15	88.54	81.47	84.37
5	110.57	97.73	84.82	100.02	85.23	105.12	84.69	104.75	86.93	112.60	92.88	104.27
6	112.96	111.28	107.39	110.39	106.80	112.82	106.37	111.99	102.98	111.67	107.83	115.31
7	113.79	116.60	99.89	115.79	102.11	118.92	103.68	118.17	101.70	121.80	109.04	121.04
8	112.52	122.06	119.51	124.04	117.40	125.16	116.88	124.49	118.03	126.46	123.91	129.21
9	111.90	130.08	101.71	126.31	103.37	129.06	103.40	123.14	103.70	119.50	106.60	123.72
10	113.09	126.35	125.95	131.89	124.95	130.35	122.82	129.77	125.33	127.82	123.83	128.35
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 155 MHz; 10 dBm.
LO IN: 379 MHz; +17.00 dBm
IF OUT: 224 MHz; 2.21 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.




Typical Performance Curves


Conversion Loss @IF=224 MHz

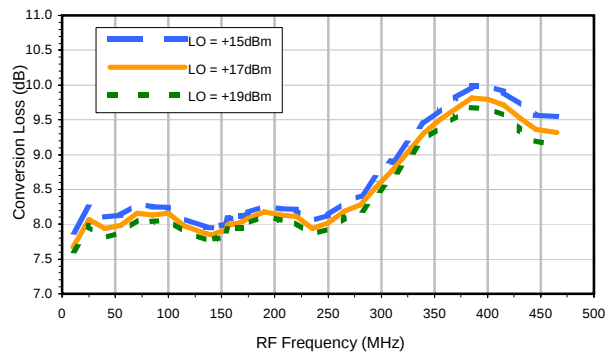


Conversion Loss vs. LO @ RF=155.1 MHz

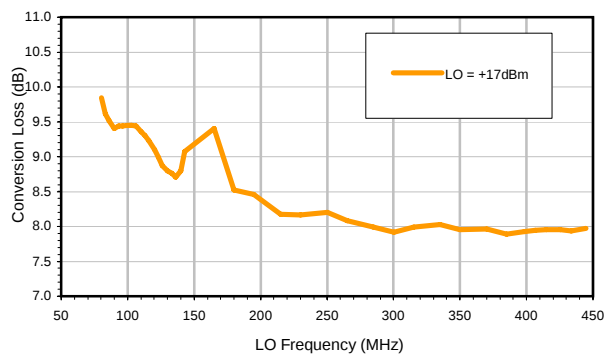


Conversion Loss vs. IF @ RF=155.1 MHz

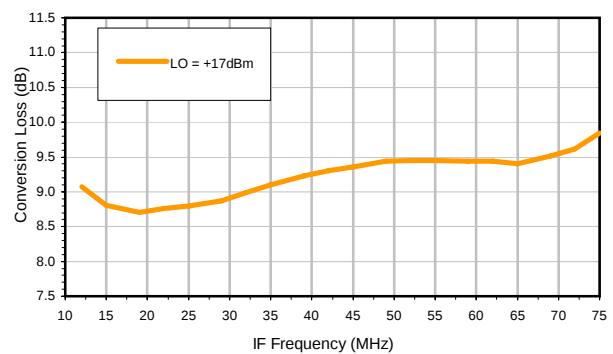


Conversion Loss vs. IF @ RF=135.1 MHz

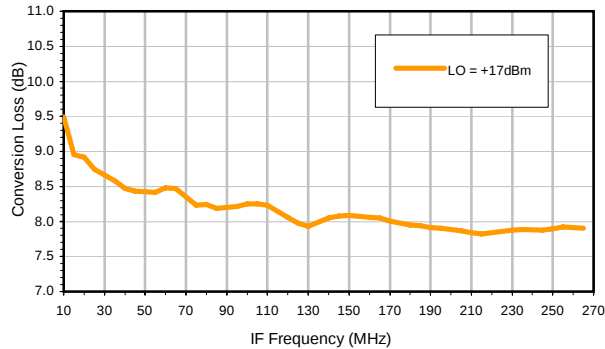


Conversion Loss vs. IF @ RF=175.1 MHz

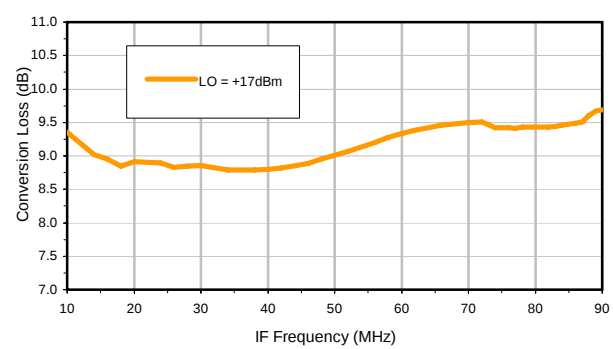


IP-3 Input

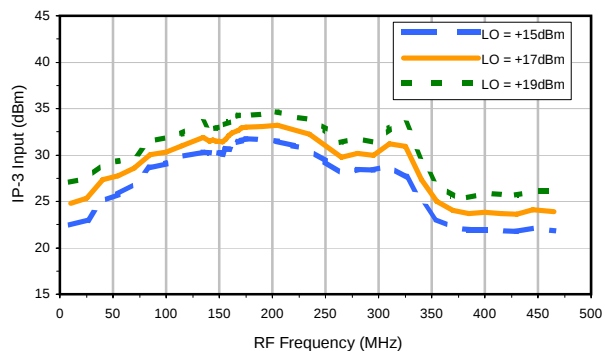

Compression @ RF IN = +20 dBm

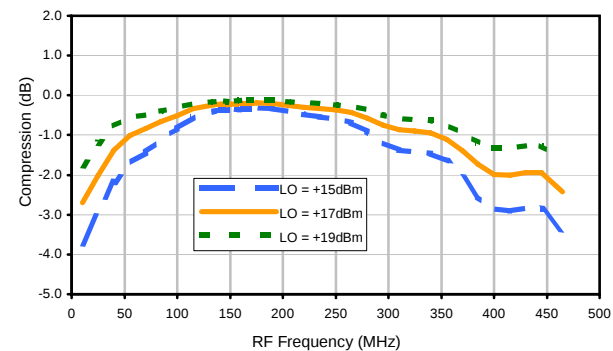

Typical Performance Curves

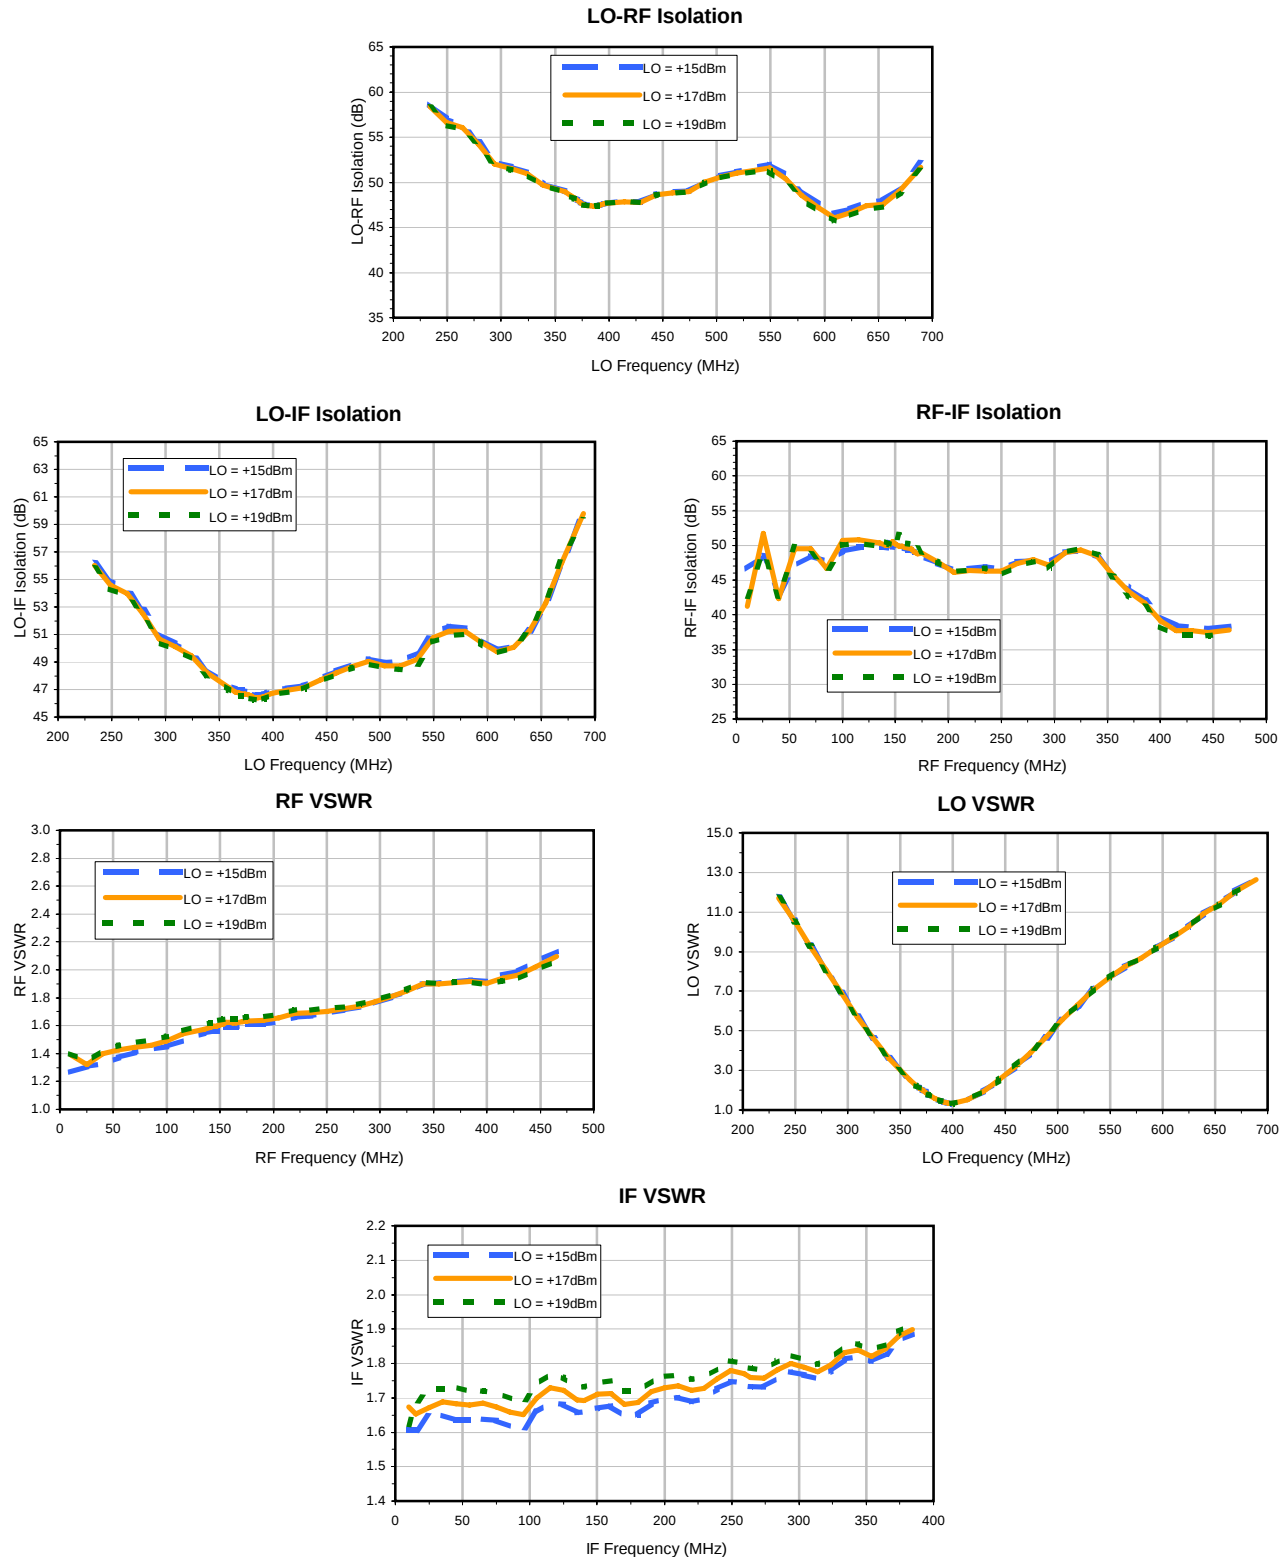

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	20.38	20.42	21.11	30.08	34.01	43.63	41.61	53.13	53.59	54.90
1	---	42.29	---	47.55	12.01	45.15	18.33	53.05	26.80	47.81	42.52	46.72
2	113.89	73.10	57.46	61.74	64.53	60.65	66.36	62.08	57.77	60.06	57.86	63.49
3	111.93	111.16	77.44	98.46	75.50	91.63	74.11	90.83	77.17	95.28	81.47	100.88
4	111.21	113.61	119.11	112.13	117.22	111.68	117.49	109.31	120.87	117.20	112.88	111.65
5	114.13	120.00	104.91	118.37	107.18	120.63	104.04	121.48	107.12	118.43	111.93	119.01
6	113.52	119.12	119.50	118.55	117.55	120.09	120.59	121.31	119.44	120.90	118.08	120.04
7	114.15	120.84	121.24	118.53	119.43	118.61	116.28	121.44	119.48	119.87	121.16	117.23
8	112.00	118.66	122.39	117.31	121.71	116.26	121.97	120.64	121.41	121.03	119.81	117.01
9	114.94	122.10	121.95	121.30	117.93	121.67	119.33	119.73	120.09	119.71	120.12	119.97
10	114.02	119.78	119.97	120.14	117.58	120.33	114.46	120.16	119.67	120.34	120.57	118.85
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 155 MHz; 0 dBm.
LO IN: 379 MHz; +17.00 dBm
IF OUT: 224 MHz; -7.93 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	28.74	31.36	34.02	45.01	42.21	45.31	43.44	46.93	45.16	48.64
1	---	42.31	---	47.53	12.15	45.09	18.64	51.95	27.37	47.82	44.22	47.28
2	101.85	62.96	47.21	51.71	54.51	50.78	56.73	52.29	47.72	50.37	48.08	54.21
3	113.13	88.50	57.14	77.08	54.88	70.19	53.30	69.26	56.44	73.24	60.36	81.06
4	113.01	94.87	87.33	100.86	87.43	98.28	97.08	88.12	96.15	88.54	81.47	84.37
5	110.57	97.73	84.82	100.02	85.23	105.12	84.69	104.75	86.93	112.60	92.88	104.27
6	112.96	111.28	107.39	110.39	106.80	112.82	106.37	111.99	102.98	111.67	107.83	115.31
7	113.79	116.60	99.89	115.79	102.11	118.92	103.68	118.17	101.70	121.80	109.04	121.04
8	112.52	122.06	119.51	124.04	117.40	125.16	116.88	124.49	118.03	126.46	123.91	129.21
9	111.90	130.08	101.71	126.31	103.37	129.06	103.40	123.14	103.70	119.50	106.60	123.72
10	113.09	126.35	125.95	131.89	124.95	130.35	122.82	129.77	125.33	127.82	123.83	128.35
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 155 MHz; 10 dBm.
LO IN: 379 MHz; +17.00 dBm
IF OUT: 224 MHz; 2.21 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

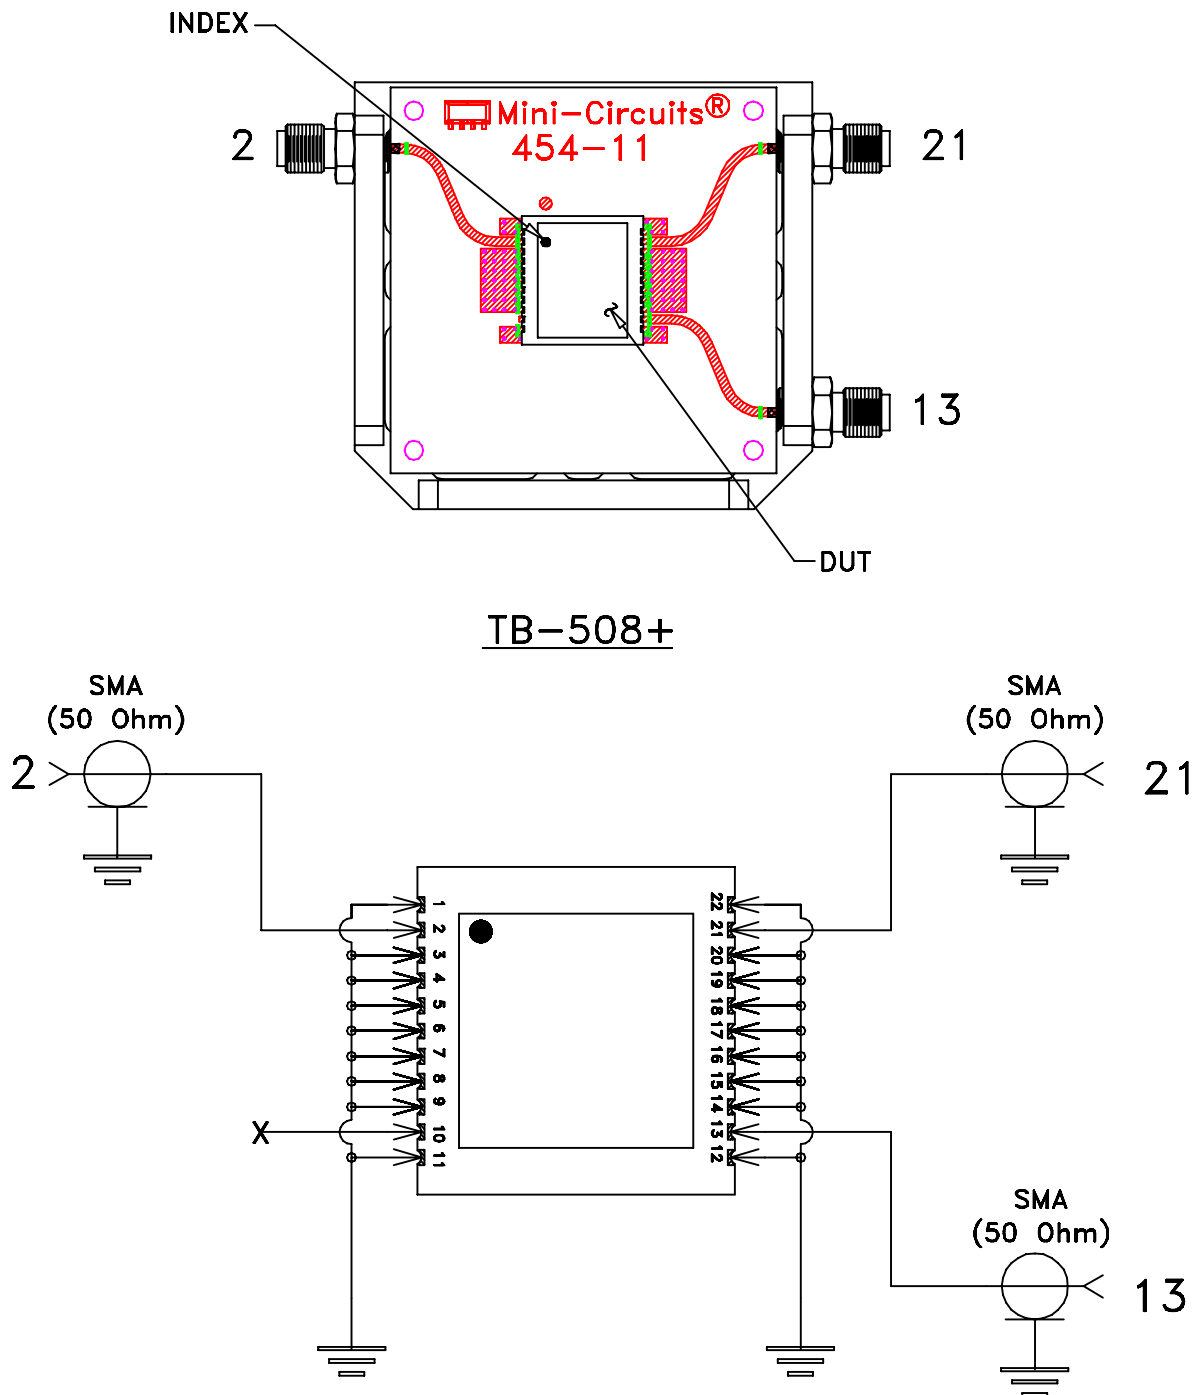

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215