



## Typical Performance Curves


**INSERTION LOSS vs. TEMPERATURE (Full Band)**  
INPUT POWER = -10 dBm

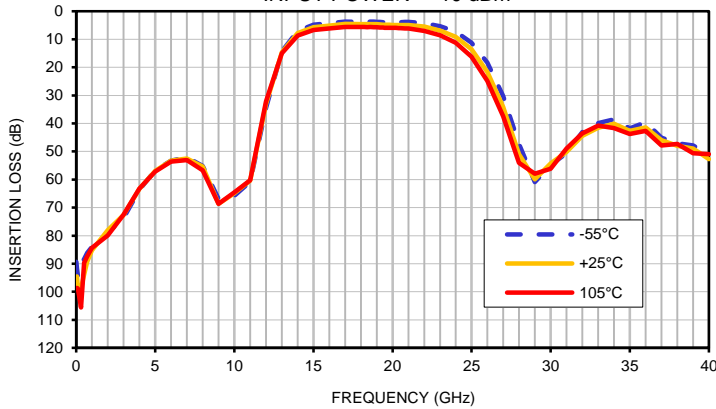


**INSERTION LOSS vs. TEMPERATURE (Pass Band)**  
INPUT POWER = -10 dBm

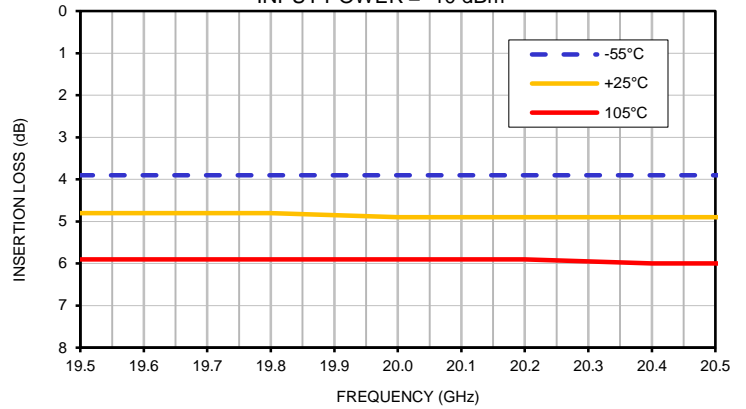


**INPUT VSWR vs. TEMPERATURE (Full Band)**  
INPUT POWER = -10 dBm

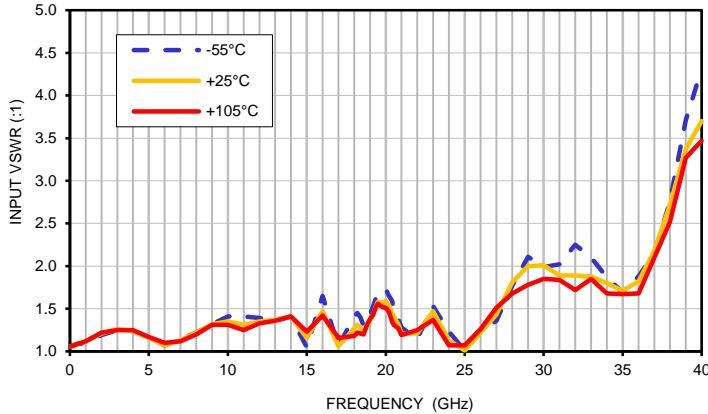


**INPUT VSWR vs. TEMPERATURE (Pass Band)**  
INPUT POWER = -10 dBm

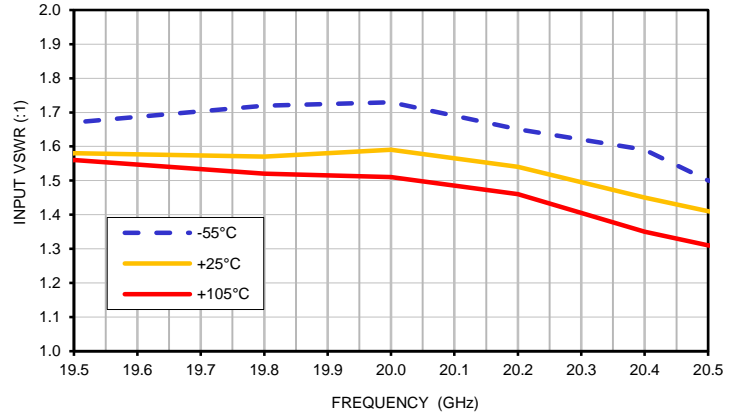

**OUTPUT VSWR vs. TEMPERATURE (Full Band)**  
INPUT POWER = -10 dBm

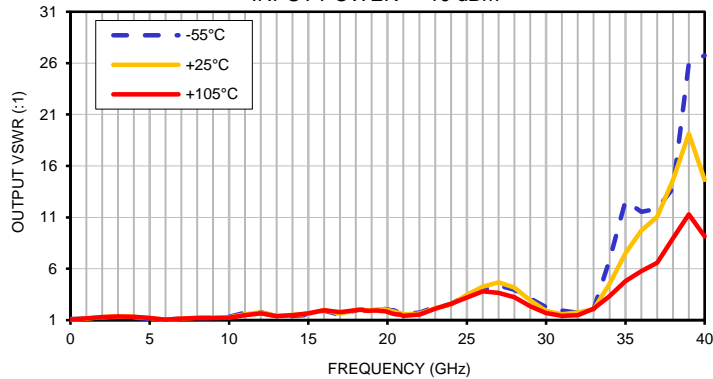

**OUTPUT VSWR vs. TEMPERATURE (Pass Band)**  
INPUT POWER = -10 dBm

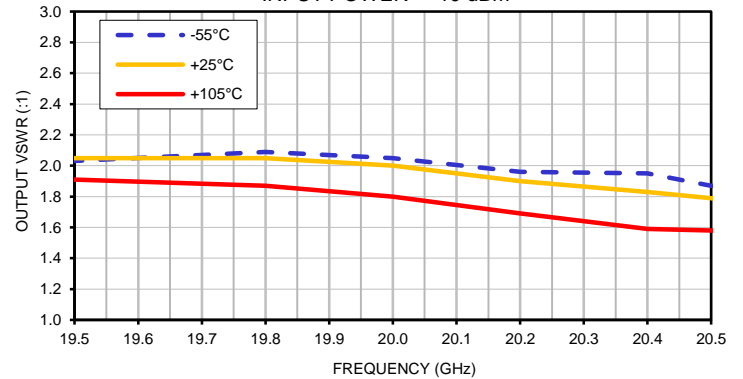

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR  
XBF-24+  
6/22/2018  
Page 1 of 1