
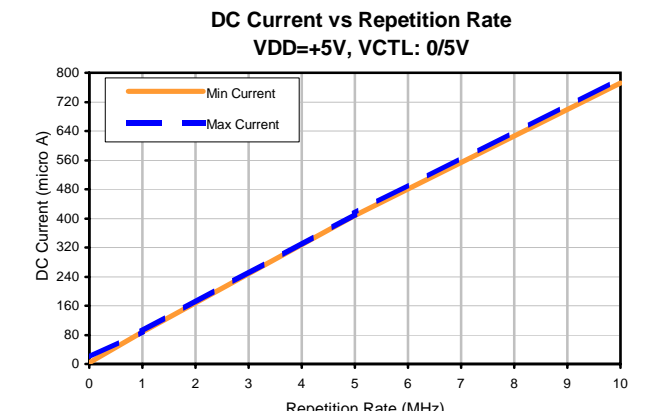
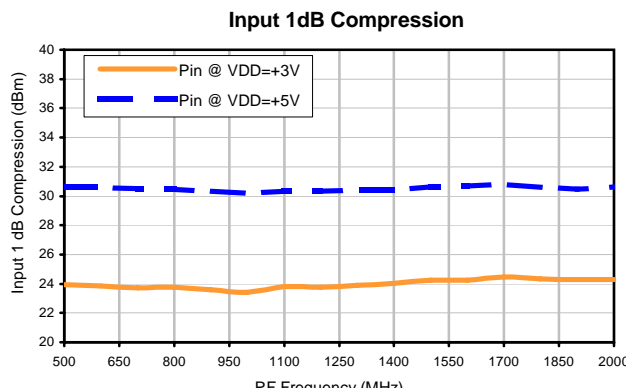
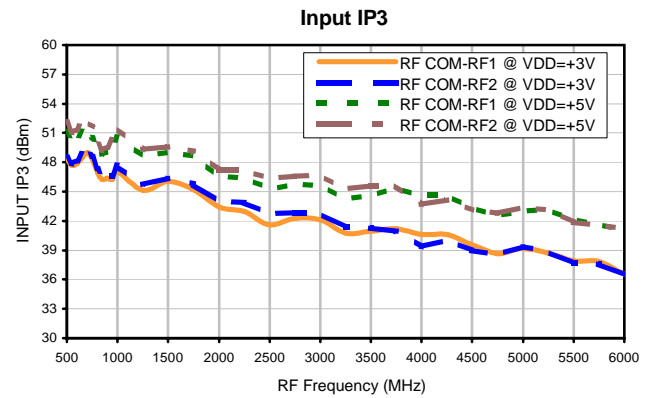
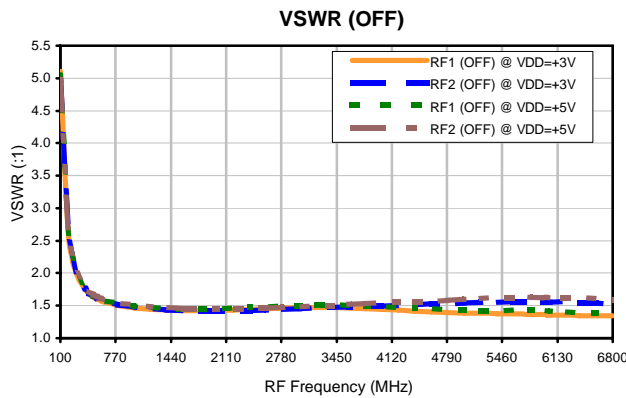
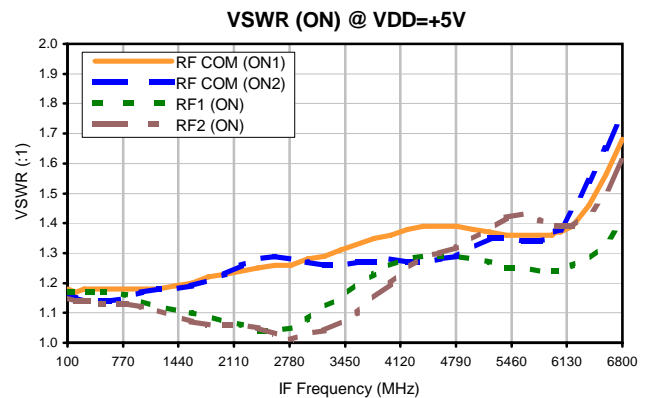
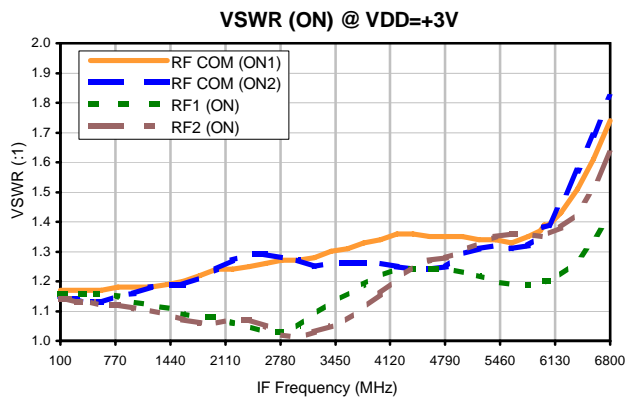
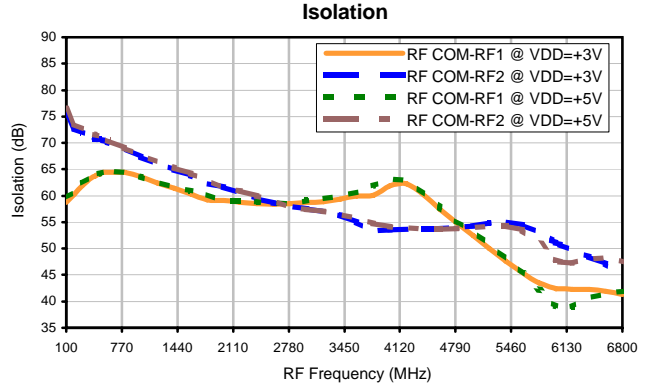


RF Switch SPDT


ZFSWA2-63DR+

Typical Performance Curves

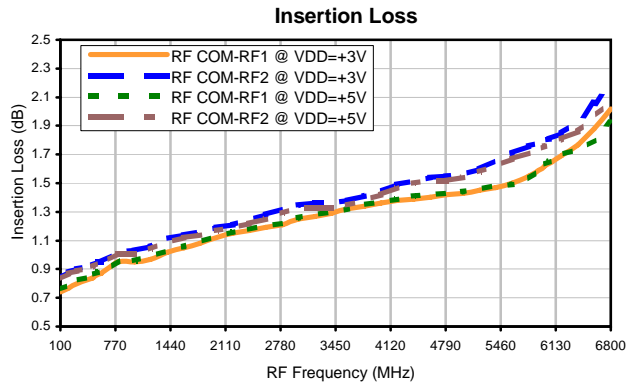


Typical Performance Curves


**Insertion Loss @ VDD=+5V over Temperature
RF COM-RF1 & RF COM-RF2**

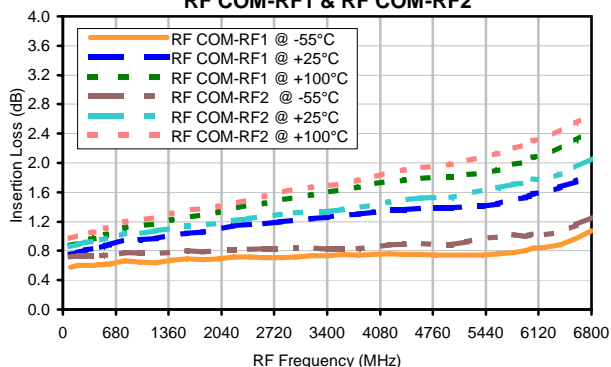


**Isolation @ VDD=+5V over Temperature
RF COM-RF1 & RF COM-RF2**

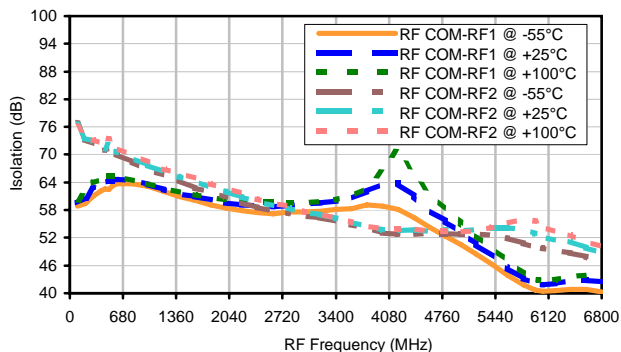

**VSWR @ VDD=+5V over Temperature
RF COM (ON1) & RF COM (ON2)**

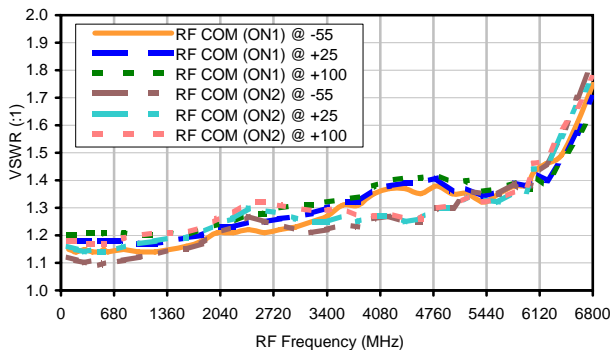

**VSWR @ VDD=+5V over Temperature
RF1(ON) & RF2 (ON)**

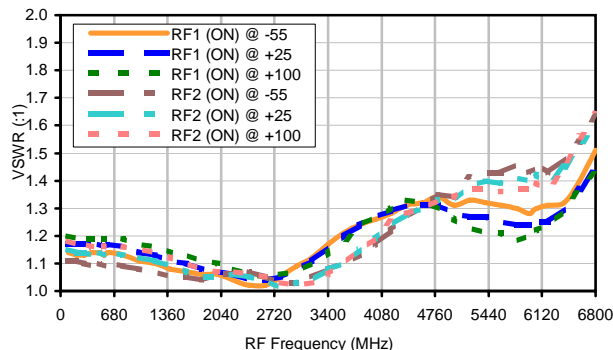

**VSWR @ VDD=+5V over Temperature
RF1(OFF) & RF2 (OFF)**

