



Typical Performance Curves


Conversion Loss @ IF=30MHz

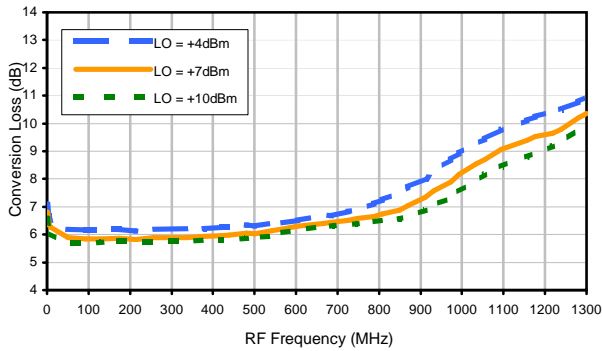


Conversion Loss vs. IF @ RF=300.1MHz

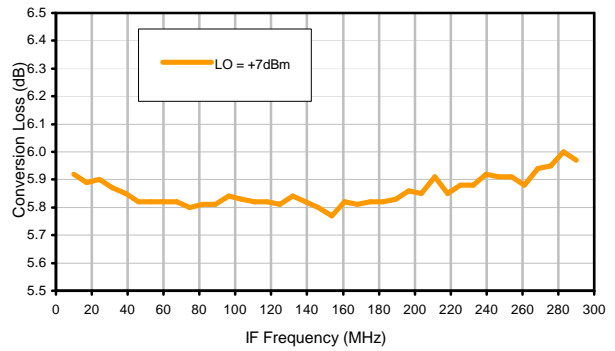


Conversion Loss vs. IF @ RF=10.1MHz

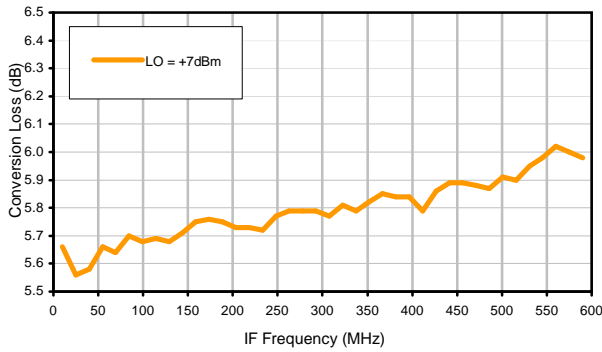


Conversion Loss vs. IF @ RF=600.1MHz

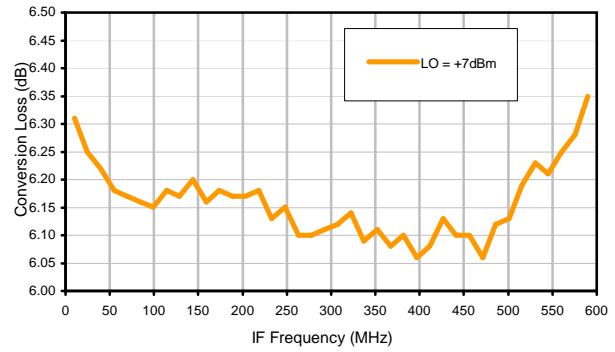

IP3 Input

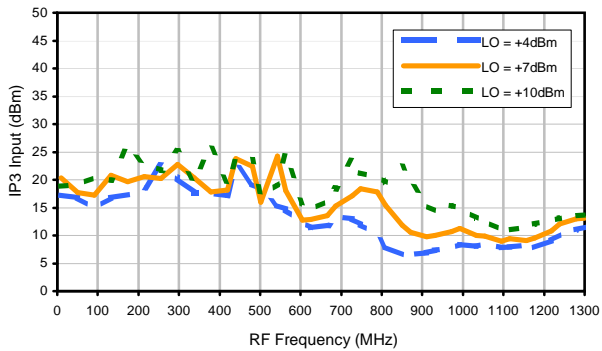


Compression @ RF IN=+1dBm

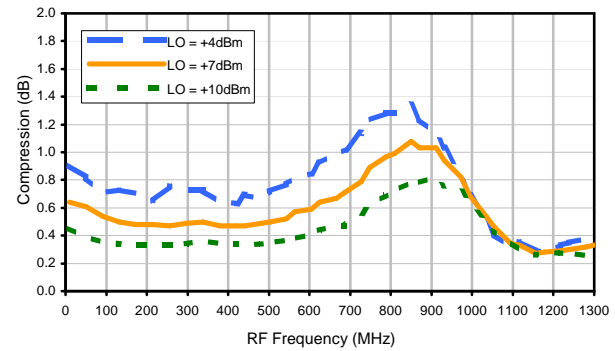


Typical Performance Curves


LO-RF Isolation

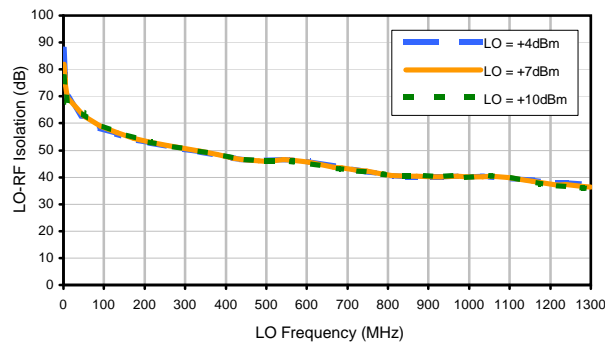


LO-IF Isolation

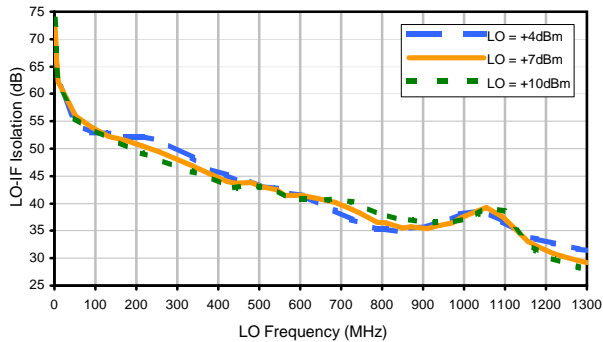


RF-IF Isolation

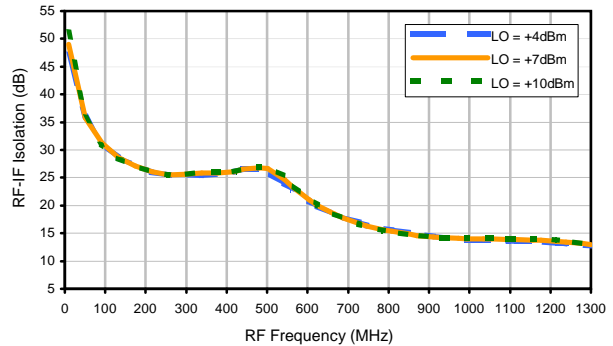


RF VSWR

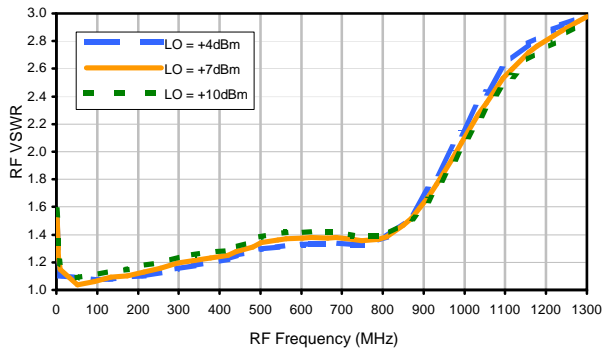

LO VSWR

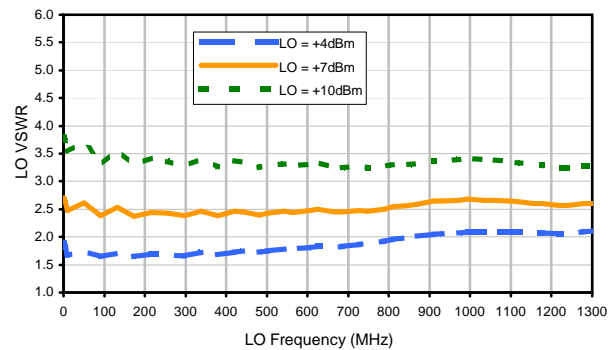

IF VSWR

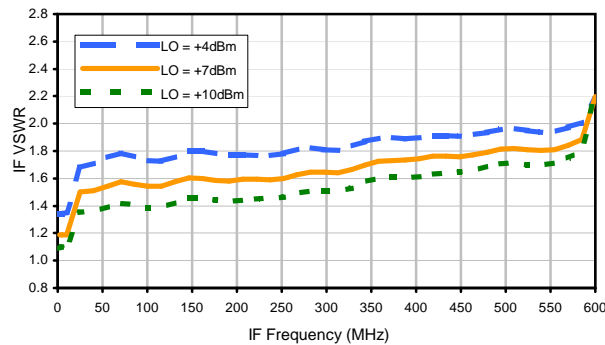

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	26	27	52	23	39	27	53	28	50
1	-	20	+0	29	12	32	17	34	31	50	50	49
2	>100	70	61	71	62	70	61	72	67	73	62	>80
3	>100	>80	73	>80	76	>80	65	>80	70	>80	72	>80
4	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	79	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	76	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 300.1 MHz; -14.00 dBm.
 LO IN: 330.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.96 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	36	39	57	33	52	40	64	44	71
1	-	20	+0	29	12	33	18	36	32	56	53	55
2	>100	61	53	66	54	64	55	67	57	66	55	76
3	>100	53	50	58	52	60	46	58	46	60	56	67
4	>100	81	>90	78	77	76	77	73	69	78	83	>90
5	>100	81	65	65	60	68	58	67	57	77	57	73
6	>100	>90	87	90	87	>90	87	>90	87	>90	90	>90
7	>100	>90	79	84	75	>90	80	88	89	85	83	86
8	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
9	>100	>90	>90	>90	88	>90	88	>90	>90	>90	>90	>90
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 300.1 MHz; -4.00 dBm.
 LO IN: 330.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -10.01 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 TUF-1SM+
 100818
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://www.minicircuits.com)