



Typical Performance Curves


Conversion Loss @ IF=30MHz

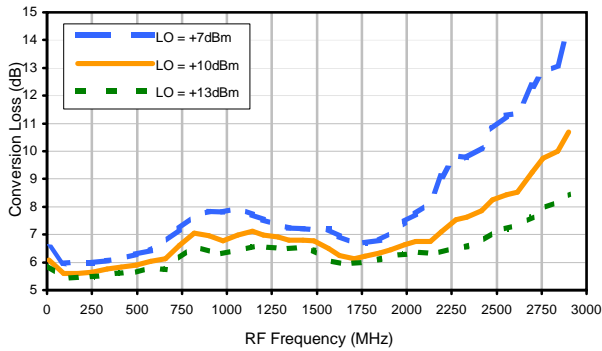


Conversion Loss vs. IF @ RF=750.1MHz

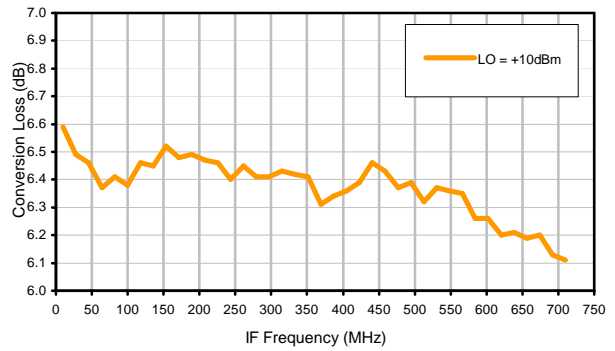


Conversion Loss vs. IF @ RF=20.1MHz

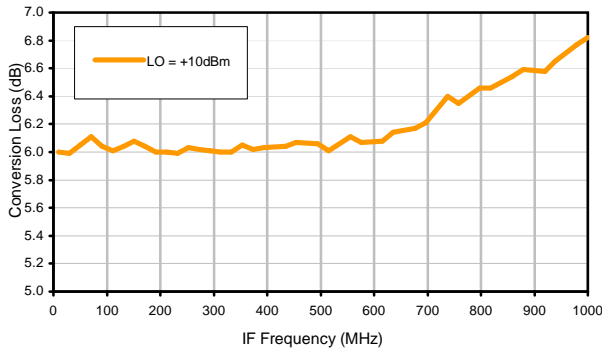


Conversion Loss vs. IF @ RF=1500.1MHz

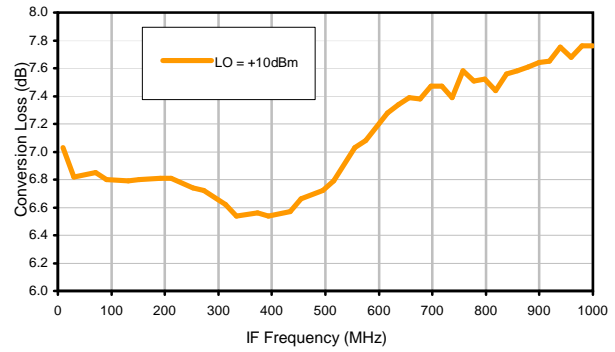

IP3 Input

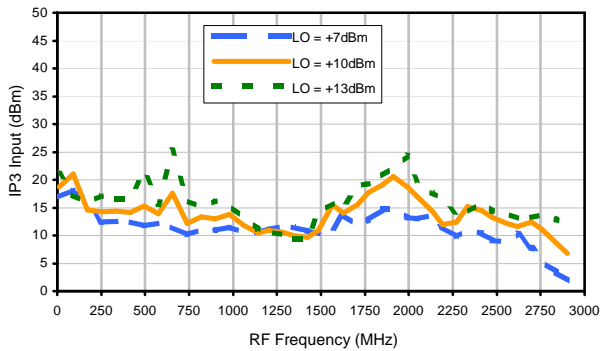


Compression @ RF IN=+5dBm

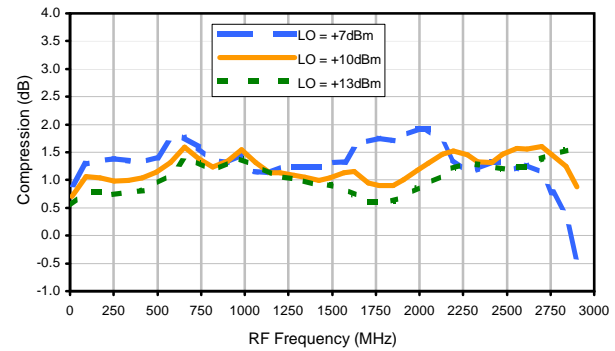


Typical Performance Curves


LO-RF Isolation

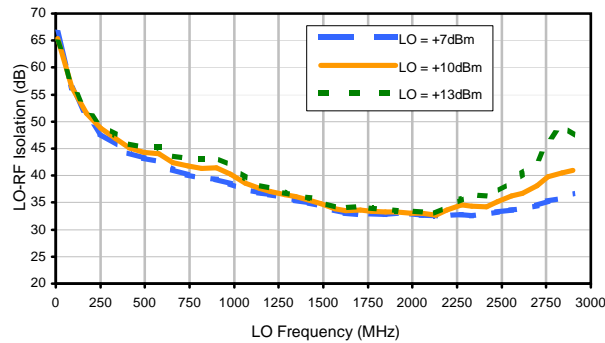


LO-IF Isolation

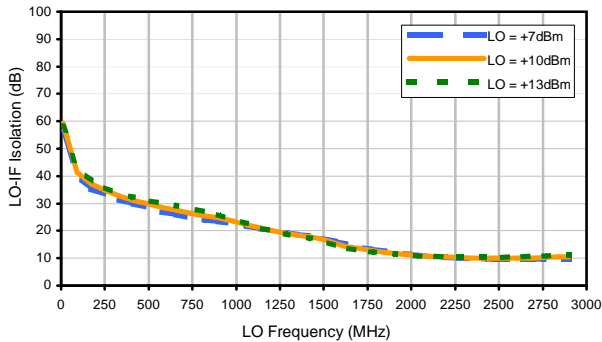


RF-IF Isolation

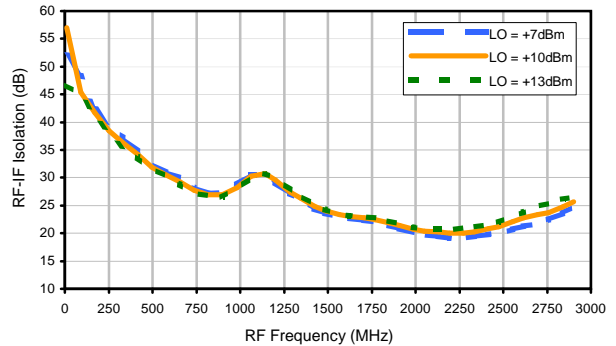


RF VSWR

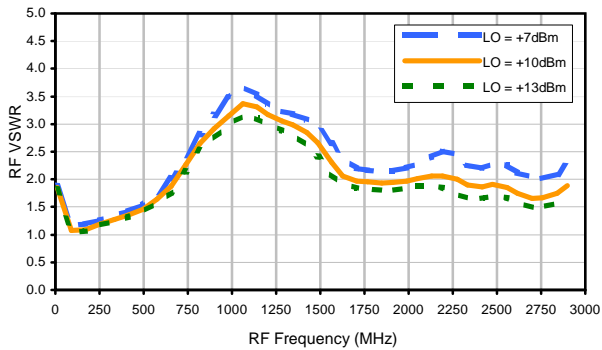

LO VSWR

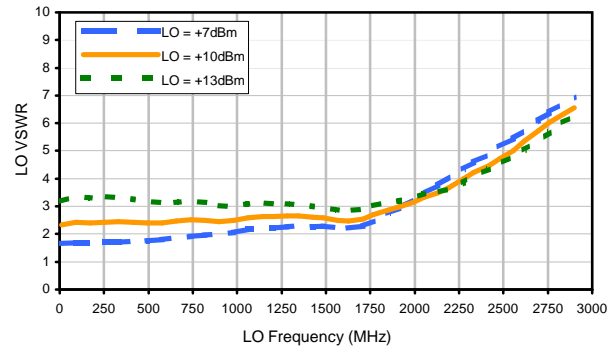

IF VSWR

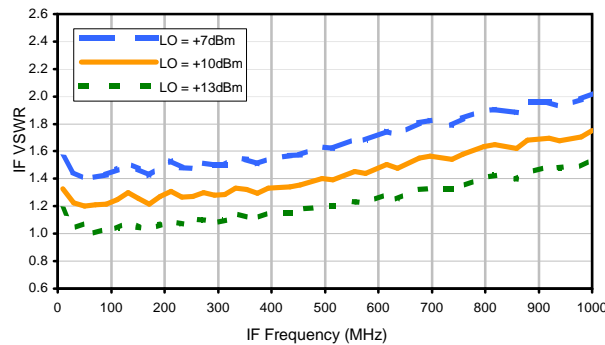

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	10	39	26	46	24	43	38	62	47	79
1	-	21	+0	38	19	44	37	49	49	59	57	69
2	86	74	38	58	38	67	51	70	42	56	55	76
3	>100	49	40	52	36	52	43	53	43	63	55	67
4	>100	83	76	80	50	70	52	71	65	67	64	68
5	>100	65	59	63	53	79	47	83	56	75	56	73
6	>100	77	78	85	79	83	66	79	63	79	78	82
7	>100	82	74	82	72	85	63	71	60	71	69	82
8	>100	>93	>93	>93	83	87	88	91	70	>93	71	88
9	>100	>93	>93	>93	91	92	92	86	80	>93	71	90
10	>100	>93	>93	>93	>93	>93	90	>93	>93	>93	83	>93
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; 0.00 dBm.
 LO IN: 780.01 MHz; +10.00 dBm
 IF OUT: 29.91 MHz; -6.67 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+1	27	15	34	11	31	24	48	37	67
1	-	22	+0	36	20	37	36	46	47	50	53	60
2	>100	74	44	65	44	67	57	68	47	60	66	73
3	>100	74	55	68	50	69	56	76	56	76	62	80
4	>100	>83	>83	>83	81	>83	76	>83	>83	>83	76	>83
5	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
6	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
7	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
8	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
9	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -10.00 dBm.
 LO IN: 780.01 MHz; +10.00 dBm
 IF OUT: 29.91 MHz; -16.9 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 TUF-5LH+
 100818
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com