



Mini-Circuits®

CERAMIC

High Pass Filter

HFCN-1320D+


50Ω 1400 to 5000 MHz

THE BIG DEAL

- Small Size
- 7 Sections
- Temperature Stable
- Excellent Power Handling, 7 W
- Hermetically Sealed
- LTCC Construction
- Low Cost

APPLICATIONS

- Sub-Harmonic Rejection
- Transmitters/Receivers
- Lab Use



Generic photo used for illustration purposes only

CASE STYLE: FV1206

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Stopband	Rejection Loss	880	40		dB
		1060	20		
	Freq. Cut-Off	1320	3.0		dB
	VSWR	880-1060	20		:1
Passband	Insertion Loss	1400-5000	2.0		dB
		1700-3800		1.3	dB
	VSWR	1700-3700	1.5		:1

1. DC Resistance to ground is 100 Mohms min.

2. Measured on Mini-Circuits Characterization Test Board TB-HFCN-1320D+.


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	7 W max. at +25°C
Max. DC Voltage at Pins 1 & 3	+25 VDC


3. Derate linearly to 3 W at +100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

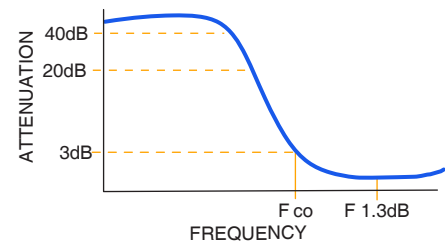

FUNCTIONAL SCHEMATIC

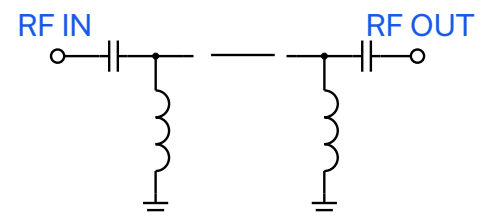

REV. D
ECO-026891
HFCN-1320D+
MCL NY
250919

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 3



Mini-Circuits

CERAMIC

High Pass Filter


HFCN-1320D+

50Ω 1400 to 5000 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: ZM

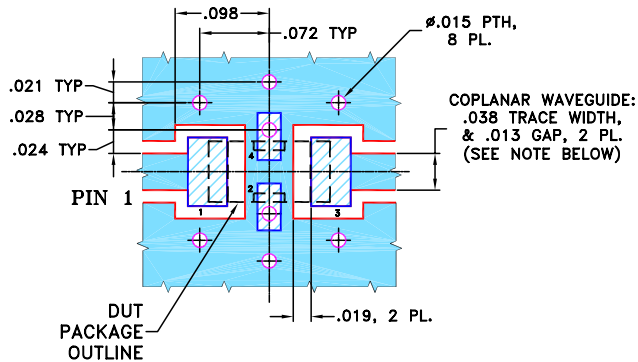DEMO BOARD MCL P/N: TB-HFCN-1320D+
SUGGESTED PCB LAYOUT (PL-137)


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

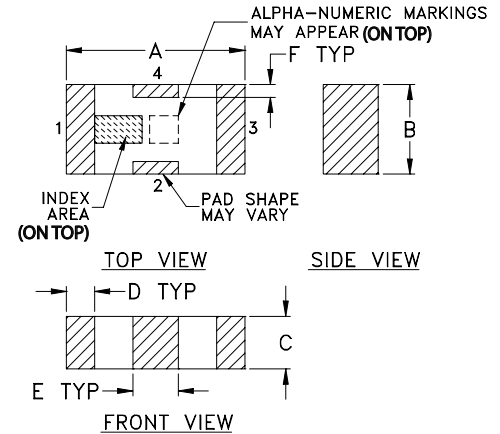

PCB Land Pattern

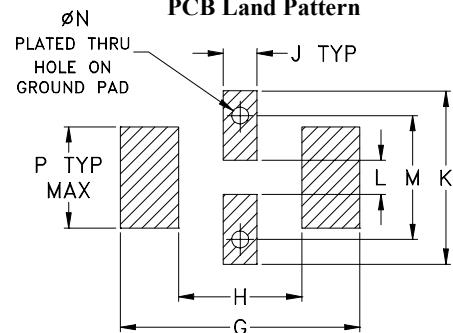

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches)
mm

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

TAPE & REEL INFORMATION: F71



Mini-Circuits

CERAMIC


High Pass Filter

HFCN-1320D+

50Ω 1400 to 5000 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	94.16	1737.18
100	69.34	217.15
880	55.96	49.64
1060	27.72	27.59
1180	13.92	12.18
1260	6.40	4.64
1320	2.97	2.12
1400	1.55	1.42
1700	0.75	1.31
3700	0.55	1.41
3800	0.59	1.49
5000	1.76	2.81
6000	3.08	4.13
8000	5.76	7.66

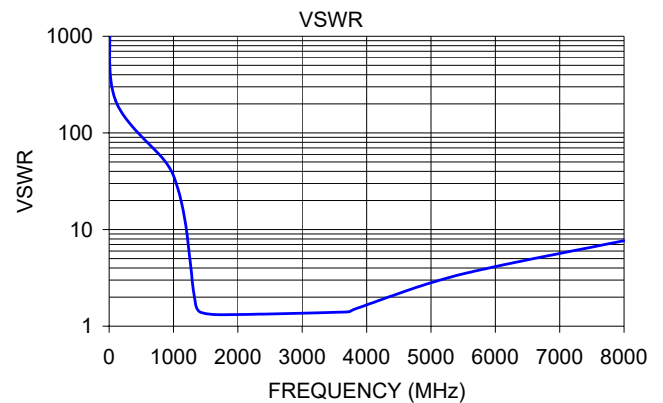

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

