



Mini-Circuits®

CERAMIC


High Pass Filter

HFCN-650D+

50Ω 710 to 2490 MHz

FEATURES

- Low Cost
- Small Size
- 7 Sections
- Temperature Stable
- LTCC Construction
- Excellent Power Handling, 7 W
- Hermetically Sealed



Generic photo used for illustration purposes only

CASE STYLE: FV1206

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Sub-Harmonic Rejection
- Transmitters/Receivers
- Lab Use

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Stopband	Rejection Loss	390	40		dB
		480	20		
	Freq. Cut-Off	650	3.0		dB
	VSWR	390-480	20		:1
Passband	Insertion Loss	710-2490	2.0		dB
		850-2000		1.3	dB
	VSWR	760-1700	1.5		:1

1. DC Resistance to ground is 100 Mohms min.


2. Measured on Mini-Circuits Characterization Test Board TB-HFCN-650D+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	7 W max. at +25°C
Max. DC Voltage at Pins 1 & 3	+25 VDC

3. Passband rating, derate linearly to 3 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE



FUNCTIONAL SCHEMATIC

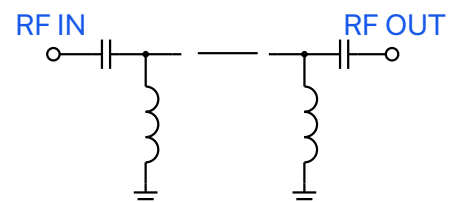

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-026381
HFCN-650D+
MCL NY
250731

PAGE 1 OF 3



Mini-Circuits®

CERAMIC

High Pass Filter

50Ω 710 to 2490 MHz


HFCN-650D+

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: XC

DEMO BOARD MCL P/N: TB-HFCN-650D+
SUGGESTED PCB LAYOUT (PL-137)

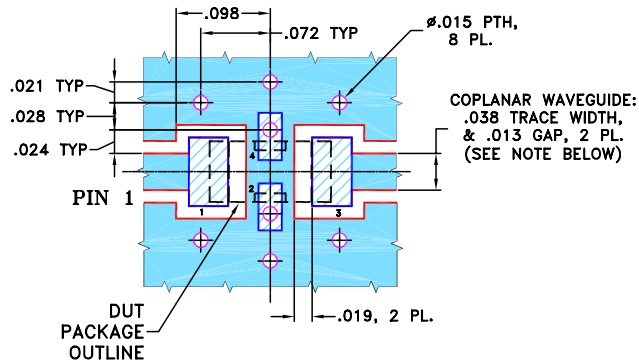


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

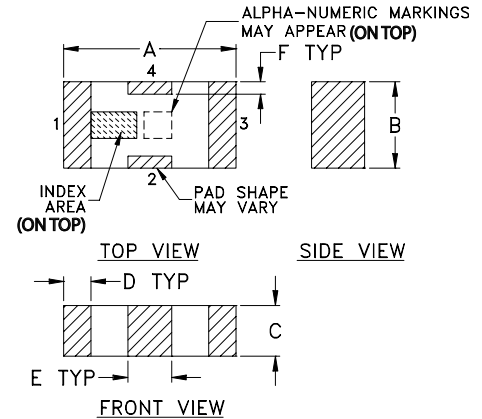

PCB Land Pattern

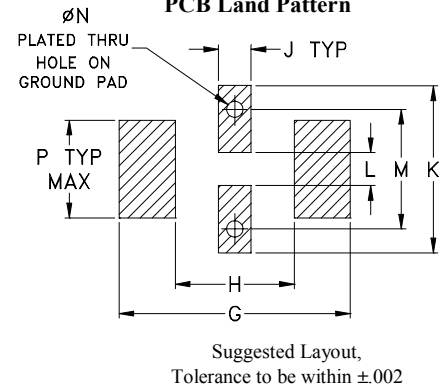

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.126	.063	.037	.020	.032	.009	.169	.087	.024	.122	.024	.087	.012	.071	grams
3.20	1.60	0.94	0.51	0.81	0.23	4.29	2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

TAPE & REEL INFORMATION: F71



CERAMIC

High Pass Filter



HFCN-650D+

Mini-Circuits

50Ω 710 to 2490 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR :1
1	96.55	1737.18
390	51.73	56.04
480	28.47	28.96
560	14.13	12.44
550	15.77	14.26
600	8.26	6.63
650	3.61	2.89
710	1.66	1.66
850	0.90	1.42
1500	0.44	1.27
2000	0.99	2.13
2490	1.89	3.29
2800	2.61	4.25
4000	5.86	9.74

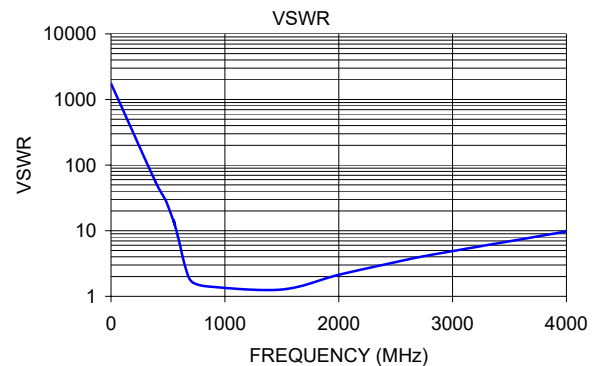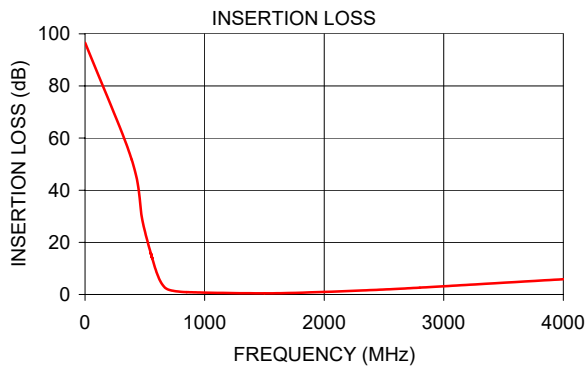

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

