

# X2 Frequency Multiplier

50Ω Output 3400 to 7200 MHz

KC2-36+  
KC2-36




## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input, 25°C	200mW


## Pin Connections

INPUT	10
OUTPUT	5
50Ω TERMINATE EXT.	3
GROUND	1,2,4,6,7,8,9

## Outline Drawing

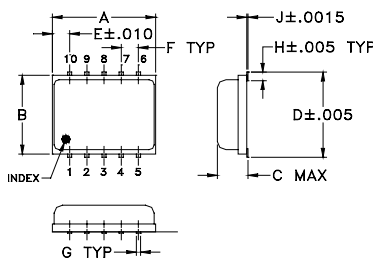

## PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.30	.250	.085	.266	.050	.050
7.62	6.35	2.16	6.76	1.27	1.27
H	J	K	L	M	
.029	.004	.085	.296	.030	
0.74	0.10	2.16	7.52	0.76	

## Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- low conversion loss, 11 dB typ.
- LTCC design
- low profile, 0.085"
- low cost

## Applications

- synthesizers
- local oscillators





## Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1 Input	F2 Output	Min.	Max.	Typ.	Max.	F1 Typ.	F3 Min.	F3 Typ.	F4 Min.	F4 Typ.	
2	1700-3600	3400-7200	8	13	11.0	15.5	18	9	30	17	17	8
	2100-2700	4200-5400	8	13	11.0	14.8	20	12	35	17	17	8

\* Harmonics of input frequency below the power level of F2

## Typical Performance Data

Input Frequency (MHz)	INPUT RF= 8 dBm				INPUT RF= 13 dBm			
	Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)		
		F1	F3	F4		F1	F3	F4
1700.00	12.73	16.68	29.28	19.21	12.59	12.88	28.90	17.27
1900.00	10.39	17.55	38.81	20.40	11.57	13.73	38.30	16.13
2100.00	10.26	17.96	35.56	20.93	11.48	16.50	31.51	17.12
2300.00	8.06	20.57	36.41	19.59	11.11	18.03	34.08	15.65
2500.00	8.97	22.13	34.37	19.35	11.20	19.32	40.32	18.67
2700.00	10.77	24.00	38.60	18.73	11.08	23.82	30.77	17.97
2900.00	11.29	20.11	27.97	12.47	11.61	21.78	32.40	13.59
3100.00	8.92	22.40	38.64	25.49	9.60	24.16	29.28	24.36
3300.00	11.12	24.98	34.14	28.23	11.15	27.05	43.00	31.47
3500.00	9.10	27.48	40.25	29.40	9.34	28.00	46.57	29.15
3600.00	9.40	30.15	42.70	27.81	11.14	30.40	36.82	33.33

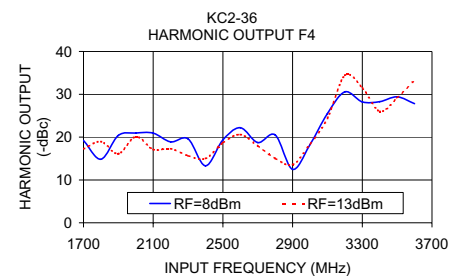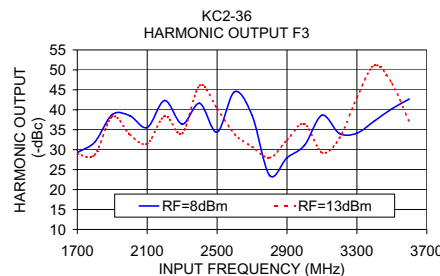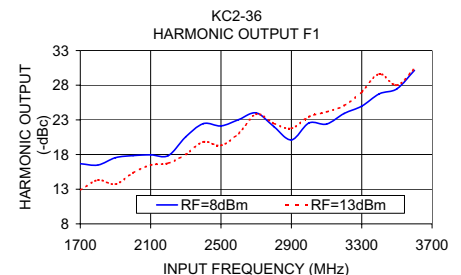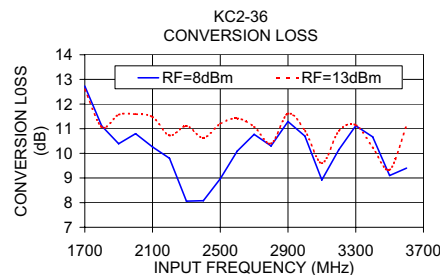

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL-NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. A  
M98898  
KC2-36  
ED-11593/1  
DJ/RS/CP  
070509