



COAXIAL

# Medium High Power Amplifier

**ZX60-100VH+**  
**ZX60-100VHX+**


50Ω 0.3 to 100 MHz

## THE BIG DEAL

- Single +12V operation
- Wide bandwidth, 0.3 to 100 MHz, usable to 110 MHz
- Excellent Gain Flatness,  $\pm 30$  dBm typ.
- Low Noise Figure, 4 dB typ.
- Output Power, up to +30 dBm typ.
- Small size

## APPLICATIONS

- Buffer amplifier
- Driver amplifier
- HF communication
- Lab
- Instrumentation
- Test equipment

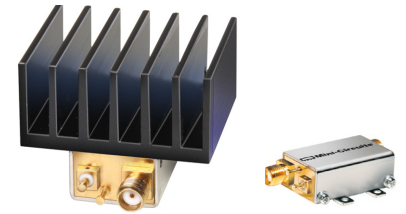

Generic photo used for illustration purposes only

<b>Model No.</b>	ZX60-100VH+	ZX60-100VHX+
<b>Option</b>	with heatsink	without heatsink
<b>Case Style</b>	MM1750	GA955
<b>Connectors</b>	SMA Female	

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## PRODUCT OVERVIEW

ZX60-100VH+ is a Class-A, high dynamic range, unconditionally stable amplifier. It features a very small ruggedized case, the ability to withstand accidental open or short at output and reverse bias protection for added reliability under difficult conditions.

## KEY FEATURES

Feature	Advantages
Frequency Range, 0.3 to 100MHz	Covers HF and partially VHF frequency bands, could be used in FM broadcast up to 110MHz. Great for the radio amateur enthusiasts.
Excellent Gain Flatness: $\pm 0.3$ dB, typ.	Excellent gain flatness minimizes distortion of amplified signals, including multi-tone, complex modulation, very wide frequency range and noise-like signals
Output Power 1W (+30dBm, typ)	High output power in very small package
Noise Figure	Low noise figure, 4dB typ. and high OIP3, +43dBm typ. defines the high dynamic range of the amplifier.

REV. B  
ECO-015740  
ZX60-100VH+  
MM/CP/AM  
231115





COAXIAL

# Medium High Power Amplifier

ZX60-100VH+  
ZX60-100VHX+

Mini-Circuits

50Ω 0.3 to 100 MHz

## ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Condition (MHz)	ZX60-100VH+ ZX60-100VHX+**			Units
		Min.	Typ.	Max.	
Frequency Range		0.3		100	MHz
Gain	0.3 - 100	33	36	—	dB
Gain Flatness	0.3 - 100	—	±0.3	—	dB
Output Power at 1dB Compression	0.3 - 100	—	+30	—	dBm
Output third order intercept point	0.3 - 100	—	+43	—	dBm
Noise Figure	0.3 - 100	—	4	—	dB
Input VSWR	0.3 - 100	—	1.6	—	:1
Output VSWR	0.3 - 100	—	1.5	—	:1
Active Directivity (Isolation-Gain)	0.3 - 100	—	14	—	dB
DC Supply Voltage		—	+12*	—	V
Supply Current		—	320	370	mA

\*Recommended Operating Voltage.

\*\*Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 3.3°C/W max.

## ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Dissipation	4.4 W
Input RF Power (no damage)	+15 dBm
DC Voltage	+13V

Permanent damage may occur if any of these limits are exceeded.





COAXIAL


# Medium High Power Amplifier

**ZX60-100VH+**  
**ZX60-100VHX+**

Mini-Circuits

50Ω 0.3 to 100 MHz

## OUTLINE DRAWING FOR MODEL WITH HEATSINK (ZX60-100VH+)

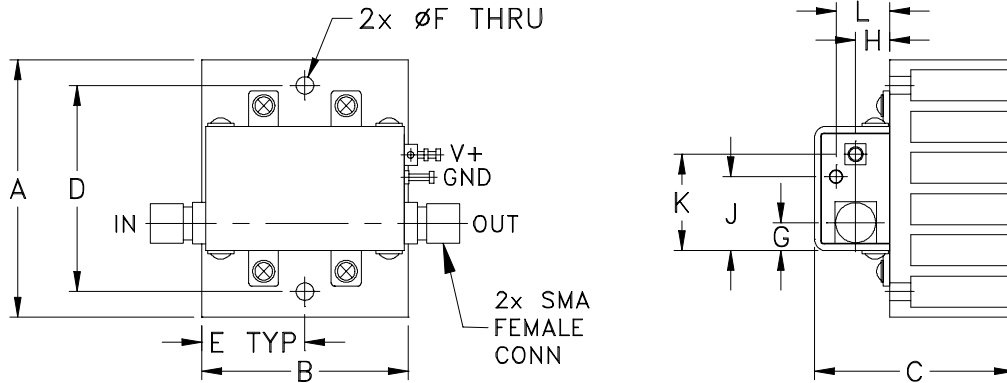


**!** NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. [AN-40-010](#).

## OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J	K	L	wt
1.56	1.25	1.21	1.250	0.63	0.106	0.17	0.21	0.45	0.59	0.33	grams
39.62	31.75	30.73	31.75	16.00	2.69	4.32	5.33	11.43	14.99	8.38	61.4

## OUTLINE DRAWING FOR MODEL WITHOUT HEATSINK (ZX60-100VHX+)

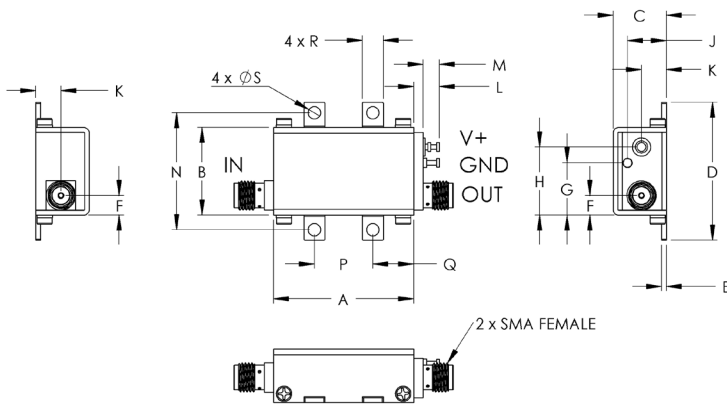

## OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
1.20	.75	.46	1.18	.04	.17	.45	.58	.33	.21	.22	.14	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	4.32	11.43	14.73	8.38	5.33	5.59	3.56	25.40	12.70	8.89	4.57	2.69	35.00

Mini-Circuits



COAXIAL

# Medium High Power Amplifier







ZX60-100VH+  
ZX60-100VHX+

Mini-Circuits

50Ω 0.3 to 100 MHz

### TYPICAL PERFORMANCE DATA/CURVES

Frequency (MHz)	Gain (dB)	Directivity (dB)	VSWR (:1)		Power Out @1 dB COMPR. (dBm)	Noise Figure (dB)	IP3 (dBm)
	12V	12V	IN	OUT	12V	12V	12V
0.30	36.67	19.01	1.14	1.46	29.87	—	40.86
0.50	36.76	19.59	1.15	1.30	30.05	—	42.65
1.00	36.80	18.86	1.16	1.25	30.16	—	44.39
5.00	36.51	18.03	1.28	1.43	30.26	—	44.51
10.00	36.35	16.46	1.45	1.54	30.27	4.14	43.98
15.00	36.40	14.68	1.57	1.56	30.18	4.03	43.65
20.00	36.44	14.52	1.63	1.53	30.11	4.05	43.45
30.00	36.53	13.71	1.66	1.47	29.99	3.98	43.33
40.00	36.61	13.48	1.63	1.39	29.98	3.99	43.23
50.00	36.66	13.42	1.57	1.31	30.04	3.97	43.21
60.00	36.69	13.28	1.49	1.24	29.96	3.89	43.21
70.00	36.69	12.84	1.41	1.18	29.71	3.92	43.11
80.00	36.65	12.98	1.34	1.15	29.34	3.93	42.94
90.00	36.54	13.45	1.27	1.11	28.98	3.95	42.64
100.00	36.36	13.69	1.21	1.06	28.70	3.96	42.38

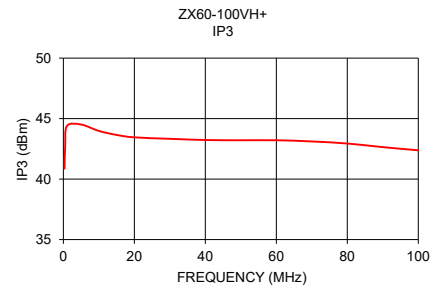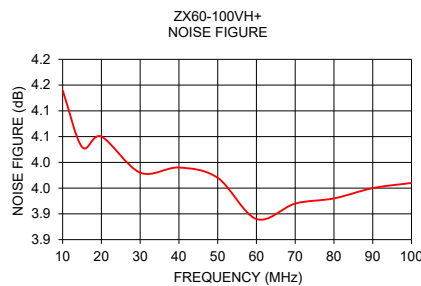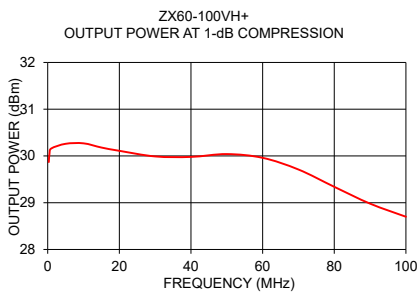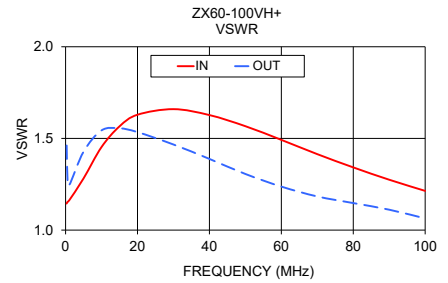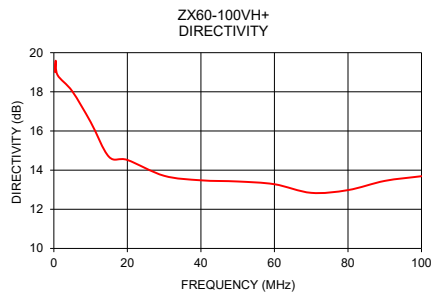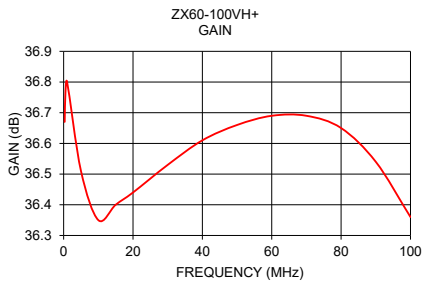

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

