

Surface Mount Frequency Mixer

ADE-10H

Level 17 (LO Power +17 dBm) 10 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

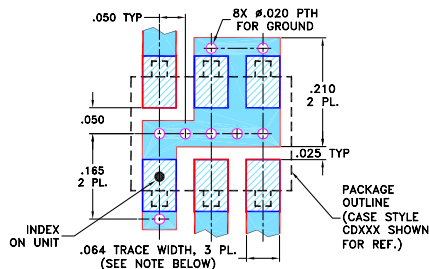

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- excellent L-R isolation, 55 dB typ.
- excellent conversion loss flatness, ±0.35 dB typ. over entire band
- low conversion loss, 7.0 dB typ.
- good VSWR, 1.4:1 typ. for LO, 1.6:1 typ. for RF, 1.4:1 typ. for IF
- good performance to 1500 MHz
- aqueous washable
- protected by U.S. Patents 6,133,525 and 6,947,717

Applications

- cellular
- PCN

Generic photo used for illustration purposes only
CASE STYLE: CD542



Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band m			Total Range Max.	L	M		U	L	M		U					
		$\overline{X}$	σ	Max.			Typ.	Min.			Typ.	Min.		Typ.	Min.	Typ.	Min.	
f_L - f_U						Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.		
10-1000	DC-800	7.0	0.10	8.5 ¹	9.5 ¹	68	55	55	40	47	31	46	30	32	20	26	13	22

1 dB COMP.: +14 dBm typ.

¹Conversion loss increases 0.5 dB when IF is above 150 MHz

L = low range [f_L to $10 f_L$]

m = mid band [$2f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.0	40.0	7.3	74.1	50.8	1.6	1.1
22.0	52.0	7.2	71.8	48.3	1.6	1.1
40.0	70.0	7.3	69.3	45.9	1.6	1.1
52.0	82.0	7.3	68.1	44.5	1.6	1.2
70.0	100.0	7.3	66.7	42.7	1.5	1.2
88.0	118.0	7.3	66.0	41.2	1.5	1.2
94.0	124.0	7.2	65.8	40.8	1.5	1.2
100.0	130.0	7.2	65.5	40.4	1.5	1.2
160.0	190.0	7.2	61.7	36.8	1.5	1.3
220.0	250.0	7.0	58.6	34.0	1.5	1.3
280.0	310.0	7.1	56.7	32.8	1.5	1.3
400.0	430.0	7.2	57.3	32.2	1.5	1.3
460.0	490.0	7.2	53.7	31.8	1.5	1.4
520.0	550.0	7.2	50.0	31.5	1.5	1.4
580.0	610.0	7.3	49.1	30.6	1.5	1.4
700.0	730.0	7.7	45.6	29.9	1.6	1.5
760.0	790.0	7.8	44.2	28.5	1.6	1.7
820.0	850.0	7.7	41.9	26.5	1.5	1.7
940.0	970.0	7.5	36.6	23.5	1.4	1.9
1000.0	1030.0	7.4	35.4	22.5	1.3	2.0







Electrical Schematic

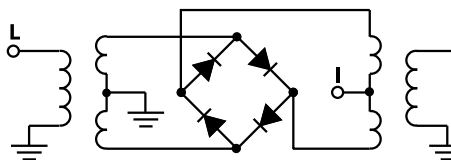

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. H
ECO-005915
ADE-10H
ED-9813/1
DJ/TD/CP/AM
210121
Page 1 of 2

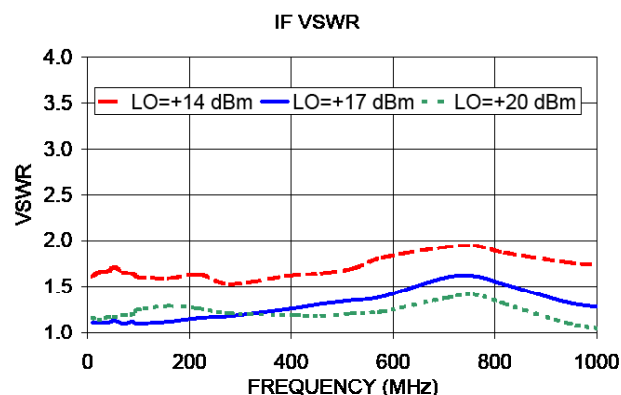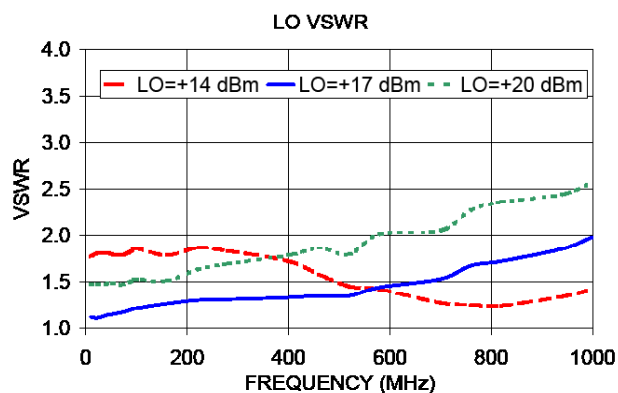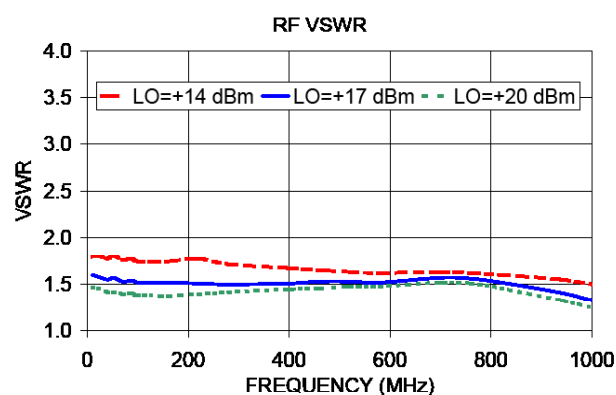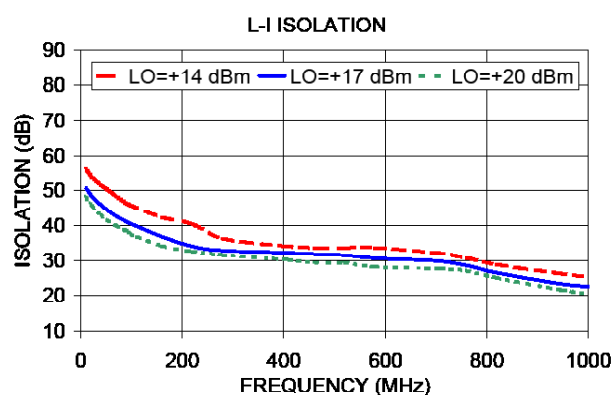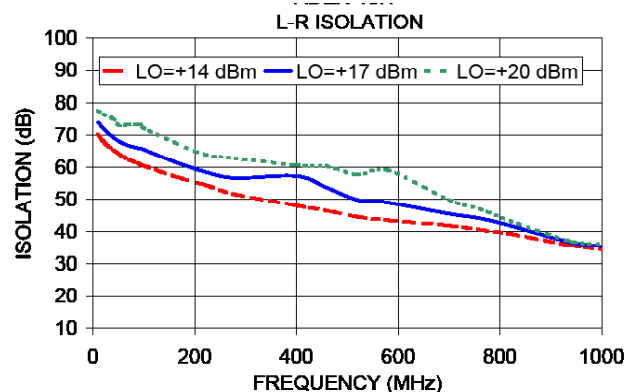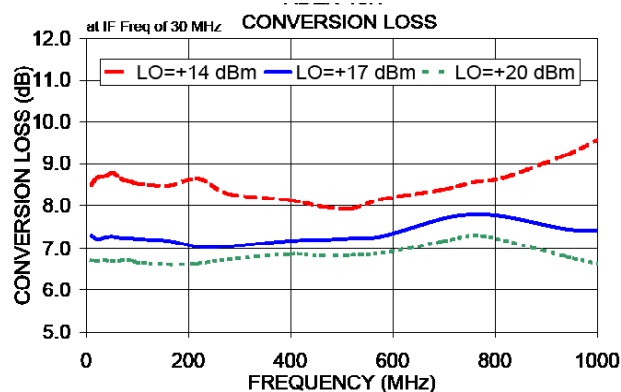

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-10H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
160.1	190.1	25.06	11.14	7.61
220.1	250.1	12.76	7.92	6.91
280.1	310.1	8.88	7.07	6.74
340.1	370.1	8.01	6.93	6.65
400.1	430.1	7.34	6.78	6.54
460.1	490.1	7.19	6.75	6.54
520.1	550.1	7.21	6.74	6.50
580.1	610.1	7.22	6.72	6.41
640.1	670.1	7.17	6.82	6.50
700.1	730.1	7.10	6.77	6.50
740.1	770.1	7.12	6.78	6.50
800.1	830.1	7.17	6.70	6.34
840.1	870.1	7.29	6.65	6.31
900.1	930.1	7.80	6.87	6.41
940.1	970.1	8.17	7.15	6.54
1000.1	1030.1	8.53	7.51	6.75
1040.1	1070.1	8.69	7.70	6.85
1100.1	1130.1	8.91	8.04	7.06
1140.1	1170.1	8.88	8.05	7.10
1200.1	1230.1	8.75	7.95	7.12
1240.1	1270.1	8.66	7.87	7.03
1300.1	1330.1	8.45	7.65	6.74
1340.1	1370.1	8.12	7.29	6.37
1400.1	1430.1	7.81	6.88	6.23
1440.1	1470.1	7.68	6.74	6.26
1500.1	1530.1	7.45	6.74	6.43
1540.1	1570.1	7.38	6.82	6.59
1600.1	1630.1	7.48	7.01	6.88
1640.1	1670.1	7.56	7.15	7.01
1700.1	1730.1	7.75	7.37	7.26
1740.1	1770.1	7.86	7.45	7.38
1800.1	1830.1	7.96	7.57	7.53
1840.1	1870.1	8.13	7.68	7.57
1900.1	1930.1	8.34	7.81	7.68
1940.1	1970.1	8.62	7.96	7.79
2000.1	2030.1	8.96	8.29	8.13
2040.1	2070.1	9.48	8.70	8.42
2100.1	2130.1	9.87	9.15	8.93
2140.1	2170.1	10.40	9.55	9.28
2200.1	2230.1	10.80	10.05	9.80

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
160.1	190.1	3.93	16.84	22.73
220.1	250.1	13.86	21.35	30.50
280.1	310.1	20.09	27.00	30.60
340.1	370.1	21.94	28.10	31.19
400.1	430.1	25.19	28.33	30.03
460.1	490.1	30.46	30.61	31.74
520.1	550.1	28.61	30.31	30.37
580.1	610.1	26.23	25.79	28.03
640.1	670.1	26.79	26.45	30.85
700.1	730.1	26.66	27.33	26.22
740.1	770.1	23.90	28.75	29.16
800.1	830.1	22.12	37.50	29.46
840.1	870.1	21.04	28.76	32.94
900.1	930.1	23.86	23.87	26.12
940.1	970.1	19.06	24.65	24.48
1000.1	1030.1	16.82	24.13	24.47
1040.1	1070.1	16.22	19.57	25.28
1100.1	1130.1	16.14	17.45	22.81
1140.1	1170.1	16.50	17.57	21.36
1200.1	1230.1	17.17	18.45	20.43
1240.1	1270.1	16.78	17.60	19.42
1300.1	1330.1	15.71	16.44	18.89
1340.1	1370.1	15.63	17.47	19.82
1400.1	1430.1	16.91	21.08	21.15
1440.1	1470.1	19.82	20.66	22.23
1500.1	1530.1	21.08	21.64	23.27
1540.1	1570.1	20.78	22.43	23.62
1600.1	1630.1	22.03	23.42	23.77
1640.1	1670.1	22.15	23.94	24.12
1700.1	1730.1	20.20	24.13	25.28
1740.1	1770.1	19.34	24.35	25.40
1800.1	1830.1	18.45	24.09	25.79
1840.1	1870.1	17.95	23.82	26.22
1900.1	1930.1	17.35	23.71	25.67
1940.1	1970.1	16.85	22.36	25.72
2000.1	2030.1	16.51	22.23	25.38
2040.1	2070.1	16.23	21.41	26.03
2100.1	2130.1	16.07	21.23	26.26
2140.1	2170.1	16.40	19.79	25.08
2200.1	2230.1	16.82	20.08	23.90

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
160.1	190.1	-12.20	-1.45	0.13
220.1	250.1	-2.46	0.09	0.08
280.1	310.1	0.08	0.21	0.07
340.1	370.1	0.61	0.19	0.07
400.1	430.1	0.59	0.19	0.08
460.1	490.1	0.57	0.16	0.10
520.1	550.1	0.58	0.22	0.11
580.1	610.1	0.44	0.24	0.17
640.1	670.1	0.56	0.20	0.18
700.1	730.1	0.74	0.30	0.23
740.1	770.1	0.84	0.35	0.27
800.1	830.1	1.15	0.69	0.52
840.1	870.1	1.13	0.83	0.63
900.1	930.1	0.90	0.89	0.75
940.1	970.1	0.74	0.93	0.89
1000.1	1030.1	0.65	0.87	0.99
1040.1	1070.1	0.58	0.76	1.04
1100.1	1130.1	0.47	0.64	1.05
1140.1	1170.1	0.55	0.67	1.06
1200.1	1230.1	0.78	0.88	1.16
1240.1	1270.1	0.88	0.90	1.25
1300.1	1330.1	1.27	1.17	1.51
1340.1	1370.1	1.50	1.42	1.69
1400.1	1430.1	1.95	1.85	1.74
1440.1	1470.1	2.03	1.83	1.58
1500.1	1530.1	2.08	1.65	1.36
1540.1	1570.1	2.14	1.51	1.20
1600.1	1630.1	2.04	1.25	0.96
1640.1	1670.1	1.95	1.08	0.81
1700.1	1730.1	2.06	0.99	0.73
1740.1	1770.1	2.21	1.04	0.71
1800.1	1830.1	2.40	1.11	0.72
1840.1	1870.1	2.62	1.31	0.85
1900.1	1930.1	2.92	1.55	0.98
1940.1	1970.1	3.13	1.77	1.12
2000.1	2030.1	3.25	1.83	1.22
2040.1	2070.1	3.34	1.90	1.25
2100.1	2130.1	3.27	1.73	1.19
2140.1	2170.1	3.34	1.74	1.17
2200.1	2230.1	3.25	1.50	0.98

REV. X2

ADE-10H

100817

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ADE-10H

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=700.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=400.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
300.0	400.1	5.91	10.0	410.1	6.73	500.0	500.1	5.44
284.7	415.4	6.01	22.6	422.7	6.72	487.4	512.7	5.51
269.5	430.6	6.05	35.1	435.2	6.74	474.9	525.2	5.72
254.2	445.9	6.14	47.7	447.8	6.76	462.3	537.8	5.85
238.9	461.2	6.17	60.3	460.4	6.86	449.7	550.4	5.93
223.7	476.4	6.24	72.8	472.9	6.86	437.2	562.9	5.99
208.4	491.7	6.22	85.4	485.5	6.86	424.6	575.5	6.02
193.2	506.9	6.29	97.9	498.0	6.88	412.1	588.0	6.06
177.9	522.2	6.31	110.5	510.6	6.84	399.5	600.6	6.07
162.6	537.5	6.36	123.1	523.2	6.90	386.9	613.2	6.10
147.4	552.7	6.39	135.6	535.7	6.96	374.4	625.7	6.16
132.1	568.0	6.38	148.2	548.3	6.96	361.8	638.3	6.14
116.8	583.3	6.39	160.8	560.9	7.04	349.2	650.9	6.19
101.6	598.5	6.41	173.3	573.4	7.06	336.7	663.4	6.29
86.3	613.8	6.46	185.9	586.0	7.07	324.1	676.0	6.29
71.1	629.0	6.43	198.5	598.6	7.17	311.5	688.6	6.30
55.8	644.3	6.56	211.0	611.1	7.17	299.0	701.1	6.32
40.5	659.6	6.63	223.6	623.7	7.19	286.4	713.7	6.36
25.3	674.8	6.69	236.2	636.3	7.30	273.8	726.3	6.42
10.0	690.1	6.75	248.7	648.8	7.33	261.3	738.8	6.43
10.0	710.1	6.77	261.3	661.4	7.43	248.7	751.4	6.46
24.5	724.6	6.77	273.8	673.9	7.49	236.2	763.9	6.53
39.0	739.1	6.79	286.4	686.5	7.43	223.6	776.5	6.51
53.5	753.6	6.82	299.0	699.1	7.48	211.0	789.1	6.52
68.0	768.1	6.77	311.5	711.6	7.49	198.5	801.6	6.56
82.5	782.6	6.85	324.1	724.2	7.46	185.9	814.2	6.52
97.0	797.1	6.78	336.7	736.8	7.53	173.3	826.8	6.54
111.5	811.6	6.74	349.2	749.3	7.47	160.8	839.3	6.60
126.0	826.1	6.78	361.8	761.9	7.49	148.2	851.9	6.57
140.5	840.6	6.79	374.4	774.5	7.55	135.6	864.5	6.56
155.0	855.1	6.80	386.9	787.0	7.44	123.1	877.0	6.56
169.5	869.6	6.77	399.5	799.6	7.40	110.5	889.6	6.55
184.0	884.1	6.84	412.1	812.2	7.41	97.9	902.2	6.64
198.5	898.6	6.93	424.6	824.7	7.35	85.4	914.7	6.60
213.0	913.1	7.04	437.2	837.3	7.43	72.8	927.3	6.67
227.5	927.6	7.18	449.7	849.8	7.42	60.3	939.8	6.81
242.0	942.1	7.29	462.3	862.4	7.39	47.7	952.4	6.82
256.5	956.6	7.55	474.9	875.0	7.47	35.1	965.0	6.97
285.5	985.6	7.71	487.4	887.5	7.50	22.6	977.5	7.08
300.0	1000.1	7.82	500.0	900.1	7.59	10.0	990.1	7.16

REV. X2
ADE-10H
100817
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
160.1	45.18	44.42	43.34	34.72	35.10	36.81
220.1	44.81	42.46	41.26	30.11	32.39	36.93
280.1	42.54	40.33	39.68	27.03	31.18	34.96
340.1	38.73	38.39	38.69	26.37	30.46	33.64
400.1	36.36	36.73	37.44	25.92	29.36	32.26
460.1	35.07	35.96	36.74	24.70	27.82	30.90
520.1	33.73	35.18	36.29	24.15	27.27	29.95
580.1	32.66	34.17	35.71	23.04	26.48	29.56
640.1	32.30	33.68	34.86	22.22	24.91	27.90
700.1	32.04	33.75	35.00	22.34	24.73	26.89
740.1	31.62	33.34	34.48	22.40	24.77	26.47
800.1	31.12	32.86	34.19	23.15	25.73	27.20
840.1	30.61	32.19	33.39	23.43	26.36	27.83
900.1	30.29	31.80	33.02	22.99	27.74	29.74
940.1	29.85	31.66	33.29	22.20	27.16	29.87
1000.1	29.12	30.44	31.80	22.29	25.72	29.46
1040.1	29.06	30.38	32.05	22.80	25.28	28.75
1100.1	28.99	30.15	31.37	24.15	26.06	28.63
1140.1	29.04	30.41	31.55	25.15	26.59	28.40
1200.1	29.52	31.27	32.81	27.83	28.31	28.84
1240.1	30.17	32.20	34.13	30.35	29.65	28.77
1300.1	31.55	34.33	36.89	33.17	30.28	27.53
1340.1	32.84	36.29	37.42	30.84	28.29	25.04
1400.1	35.21	38.44	36.83	25.91	24.29	21.38
1440.1	37.58	38.85	36.77	23.12	21.72	19.46
1500.1	39.96	40.96	38.99	19.60	18.73	17.27
1540.1	39.62	41.43	39.83	17.54	16.94	15.82
1600.1	35.35	38.77	40.21	14.94	14.88	14.20
1640.1	33.55	36.66	38.48	13.32	13.38	12.87
1700.1	30.45	32.68	33.55	11.69	11.79	11.55
1740.1	29.33	30.93	31.16	10.90	11.01	10.70
1800.1	27.73	28.69	28.46	10.33	9.89	9.77
1840.1	26.97	27.35	26.97	9.92	9.25	9.13
1900.1	25.51	25.47	25.16	9.87	8.63	8.40
1940.1	24.41	24.15	23.60	9.34	8.22	7.77
2000.1	22.96	22.72	22.29	9.26	7.81	7.30
2040.1	21.97	21.72	21.36	8.78	7.56	7.04
2100.1	20.71	20.49	20.33	8.86	7.23	6.76
2140.1	19.56	19.42	19.44	8.07	6.84	6.50
2200.1	18.44	18.40	18.35	7.92	6.53	6.06

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
160.1	190.1	44.46	44.25	42.66
220.1	250.1	37.81	40.36	39.94
280.1	310.1	39.78	38.21	38.15
340.1	370.1	38.56	37.45	37.49
400.1	430.1	37.69	37.51	37.34
460.1	490.1	37.03	37.35	38.03
520.1	550.1	38.47	38.49	37.98
580.1	610.1	37.00	35.66	34.51
640.1	670.1	35.19	35.17	34.60
700.1	730.1	36.72	37.63	39.07
740.1	770.1	39.92	42.01	45.33
800.1	830.1	38.65	38.09	36.44
840.1	870.1	32.74	31.70	31.09
900.1	930.1	28.97	27.01	26.69
940.1	970.1	26.89	25.33	24.50
1000.1	1030.1	24.11	23.21	22.31
1040.1	1070.1	22.90	22.21	21.51
1100.1	1130.1	20.96	20.43	19.95
1140.1	1170.1	19.94	19.51	19.23
1200.1	1230.1	18.86	18.18	17.58
1240.1	1270.1	18.48	17.52	16.91
1300.1	1330.1	18.37	17.27	17.55
1340.1	1370.1	18.68	17.98	19.02
1400.1	1430.1	19.58	19.34	20.28
1440.1	1470.1	20.22	19.93	20.72
1500.1	1530.1	21.19	21.14	21.87
1540.1	1570.1	22.17	22.33	23.15
1600.1	1630.1	23.61	24.12	25.23
1640.1	1670.1	24.56	25.36	26.71
1700.1	1730.1	28.01	28.23	29.02
1740.1	1770.1	32.57	30.97	29.20
1800.1	1830.1	30.27	30.27	26.58
1840.1	1870.1	27.32	26.06	24.26
1900.1	1930.1	23.74	21.32	20.79
1940.1	1970.1	22.03	19.94	19.74
2000.1	2030.1	18.97	17.28	17.29
2040.1	2070.1	17.88	16.23	16.44
2100.1	2130.1	15.55	14.35	14.80
2140.1	2170.1	14.93	13.59	14.24
2200.1	2230.1	13.43	12.44	13.35

Frequency Mixer

ADE-10H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
160.1	190.1	5.75	3.79	2.85	160.1	52.65	42.38	16.72	10.1	2.60	1.88	1.49
220.1	250.1	3.86	2.77	2.46	220.1	30.49	11.53	6.30	22.4	2.69	1.92	1.51
280.1	310.1	2.94	2.45	2.32	280.1	16.41	6.37	4.57	34.6	2.58	1.80	1.44
340.1	370.1	2.69	2.37	2.26	340.1	7.05	3.90	3.84	46.9	2.58	1.83	1.48
400.1	430.1	2.48	2.29	2.20	400.1	4.00	3.08	3.48	59.1	2.55	1.83	1.48
460.1	490.1	2.40	2.26	2.18	460.1	3.02	2.69	3.30	71.4	2.52	1.80	1.48
520.1	550.1	2.36	2.23	2.16	520.1	2.35	2.53	3.33	83.6	2.59	1.85	1.50
580.1	610.1	2.28	2.15	2.07	580.1	2.02	2.38	3.23	95.9	2.62	1.86	1.52
640.1	670.1	2.23	2.13	2.05	640.1	1.85	2.36	3.27	108.1	2.67	1.90	1.55
700.1	730.1	2.14	2.07	2.01	700.1	1.74	2.40	3.35	120.4	2.60	1.87	1.54
740.1	770.1	2.09	2.02	1.97	740.1	1.68	2.39	3.35	132.6	2.64	1.91	1.56
800.1	830.1	2.03	1.96	1.91	800.1	1.64	2.42	3.42	144.9	2.57	1.87	1.52
840.1	870.1	2.02	1.94	1.90	840.1	1.63	2.41	3.40	157.1	2.55	1.85	1.51
900.1	930.1	1.99	1.89	1.84	900.1	1.70	2.50	3.50	169.4	2.50	1.82	1.49
940.1	970.1	1.97	1.86	1.80	940.1	1.76	2.57	3.56	181.6	2.53	1.85	1.52
1000.1	1030.1	1.92	1.81	1.73	1000.1	1.86	2.69	3.70	193.9	2.61	1.91	1.57
1040.1	1070.1	1.85	1.73	1.64	1040.1	1.92	2.76	3.78	206.1	2.57	1.90	1.56
1100.1	1130.1	1.73	1.62	1.49	1100.1	1.99	2.83	3.84	218.4	2.58	1.91	1.56
1140.1	1170.1	1.63	1.51	1.38	1140.1	2.05	2.89	3.92	230.6	2.50	1.85	1.52
1200.1	1230.1	1.46	1.34	1.20	1200.1	2.12	2.93	3.95	242.9	2.46	1.83	1.51
1240.1	1270.1	1.35	1.22	1.07	1240.1	2.18	2.99	4.00	255.1	2.47	1.84	1.52
1300.1	1330.1	1.24	1.13	1.15	1300.1	2.22	2.97	3.94	267.4	2.50	1.87	1.54
1340.1	1370.1	1.22	1.20	1.33	1340.1	2.27	2.99	3.95	279.6	2.56	1.91	1.58
1400.1	1430.1	1.34	1.45	1.62	1400.1	2.26	2.90	3.81	291.9	2.53	1.90	1.57
1440.1	1470.1	1.47	1.64	1.81	1440.1	2.28	2.92	3.85	304.1	2.51	1.89	1.56
1500.1	1530.1	1.70	1.91	2.09	1500.1	2.33	2.92	3.79	316.4	2.54	1.91	1.57
1540.1	1570.1	1.84	2.06	2.26	1540.1	2.46	3.03	3.88	328.6	2.49	1.88	1.55
1600.1	1630.1	2.00	2.24	2.48	1600.1	2.69	3.09	3.81	340.9	2.50	1.90	1.57
1640.1	1670.1	2.09	2.32	2.59	1640.1	2.88	3.20	3.86	353.1	2.49	1.90	1.58
1700.1	1730.1	2.25	2.46	2.73	1700.1	3.23	3.27	3.80	365.4	2.49	1.89	1.57
1740.1	1770.1	2.33	2.51	2.77	1740.1	3.44	3.38	3.83	377.6	2.47	1.87	1.55
1800.1	1830.1	2.50	2.65	2.86	1800.1	3.83	3.47	3.76	389.9	2.44	1.86	1.55
1840.1	1870.1	2.59	2.69	2.87	1840.1	3.90	3.53	3.76	402.1	2.47	1.89	1.57
1900.1	1930.1	2.79	2.81	2.94	1900.1	4.19	3.58	3.67	414.4	2.48	1.90	1.58
1940.1	1970.1	2.92	2.87	2.94	1940.1	4.15	3.58	3.62	426.6	2.46	1.89	1.58
2000.1	2030.1	3.15	3.05	3.09	2000.1	4.39	3.60	3.54	438.9	2.47	1.89	1.57
2040.1	2070.1	3.35	3.19	3.20	2040.1	4.28	3.61	3.52	451.1	2.38	1.83	1.53
2100.1	2130.1	3.55	3.38	3.39	2100.1	4.46	3.64	3.43	463.4	2.38	1.83	1.53
2140.1	2170.1	3.74	3.52	3.55	2140.1	4.24	3.58	3.38	487.9	2.43	1.88	1.58
2200.1	2230.1	3.87	3.70	3.82	2200.1	4.34	3.62	3.33	500.1	2.42	1.88	1.57

REV. X2
ADE-10H
100817
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+0	26	2	22	3	37	28	53	26	66
1	-	29	+0	42	14	26	38	40	32	59	42	56
2	93	56	39	62	42	56	39	55	41	57	53	71
3	>100	62	59	63	56	65	50	63	65	67	66	76
4	>100	86	74	86	74	88	69	80	71	79	71	80
5	>100	>92	>92	>92	88	>92	82	>92	82	89	87	>92
6	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 700.1 MHz; -1.00 dBm.
LO IN: 730.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; -8.04 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	33	14	35	16	46	34	55	36	71
1	-	32	+0	37	14	29	37	39	42	63	58	64
2	72	46	31	54	31	51	30	47	32	68	52	68
3	>100	46	41	51	45	50	36	48	51	58	46	71
4	>100	68	57	62	49	80	51	58	49	60	53	64
5	>100	72	74	68	55	61	52	63	50	61	66	64
6	>100	82	67	87	70	73	60	76	56	67	57	66
7	>100	93	76	91	85	77	83	77	78	72	66	71
8	>100	98	83	88	89	86	71	83	68	82	71	73
9	>100	>102	>102	97	95	97	87	83	79	80	76	78
10	>100	>102	>102	>102	101	91	95	93	85	84	83	84
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 700.1 MHz; 9.00 dBm.
LO IN: 730.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; 1.97 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ADE-10H
100817
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

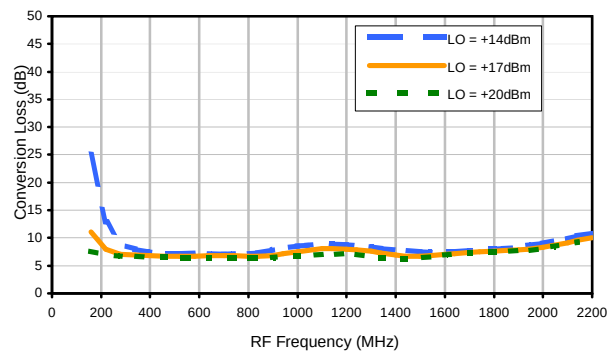


Conversion Loss vs. LO @ RF=700.1MHz

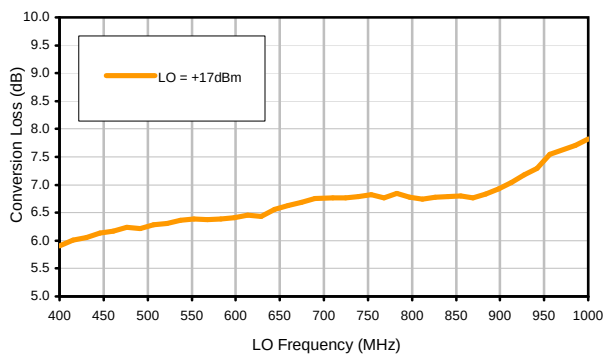


Conversion Loss vs. IF @ RF=700.1MHz

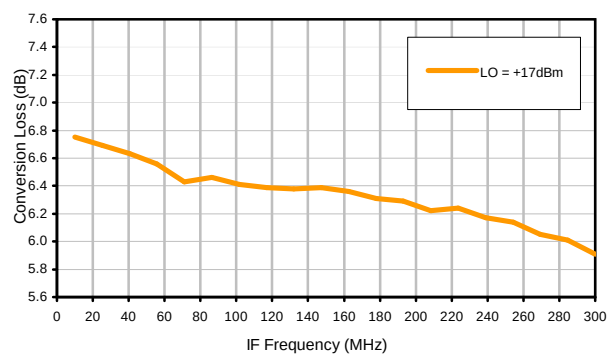


Conversion Loss vs. IF @ RF=400.1MHz

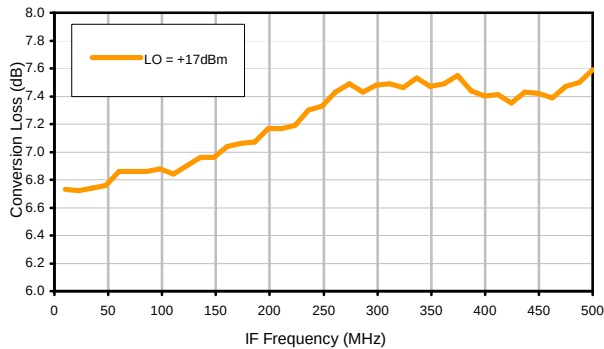


Conversion Loss vs. IF @ RF=1000.1MHz

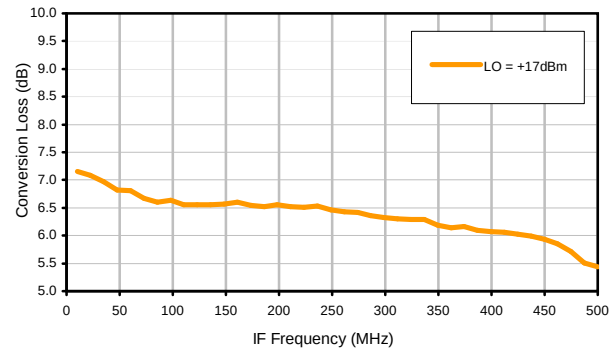

IP3 Input

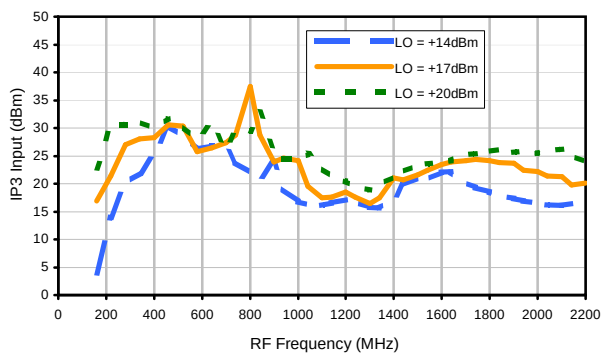

Compression @ RF IN=+14dBm

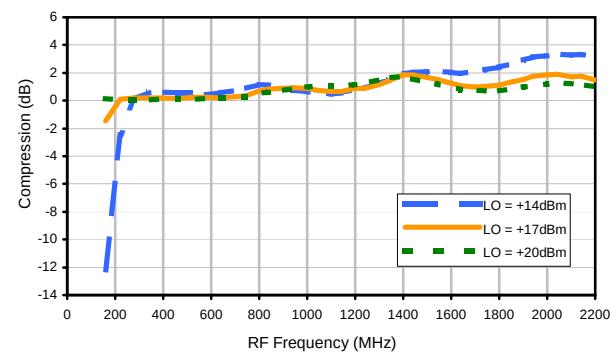

REV. X2

ADE-10H

100817

Page 1 of 3



IF/Rf MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

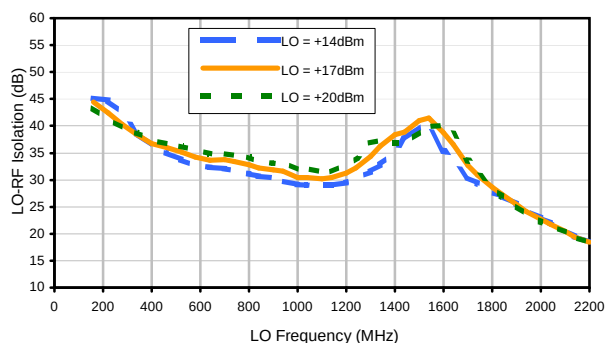


LO-IF Isolation

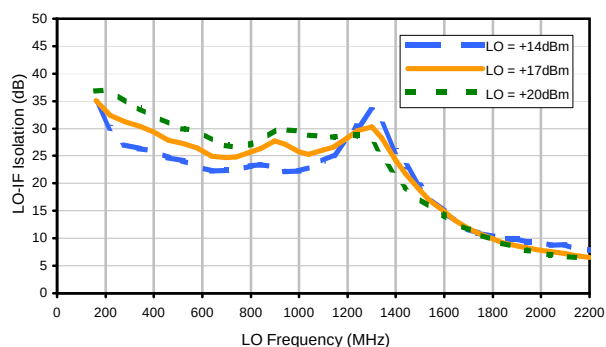


RF-IF Isolation

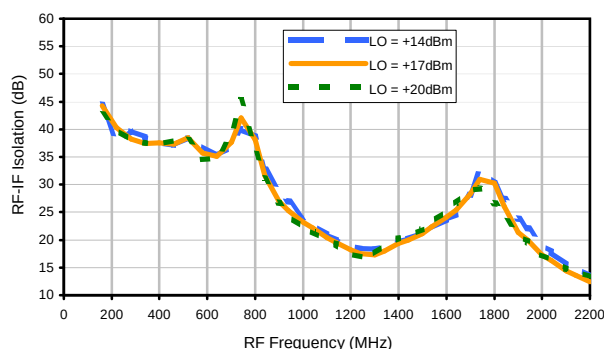


RF VSWR

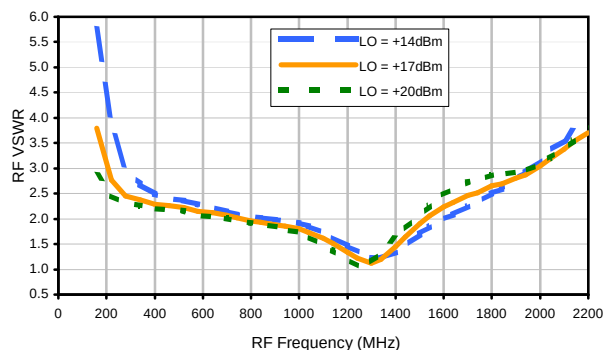

LO VSWR

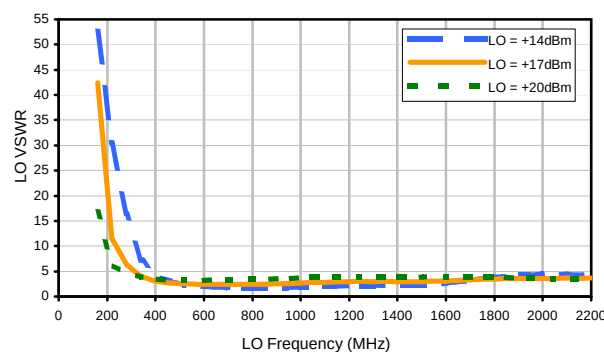

IF VSWR

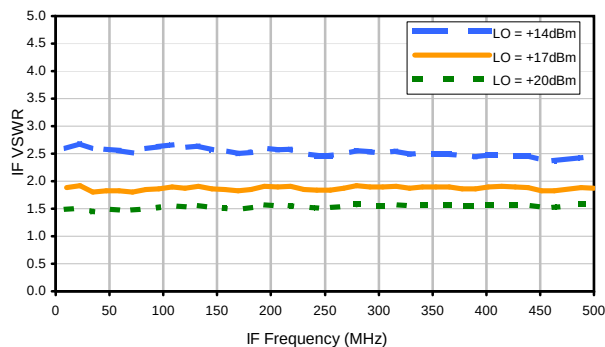

REV. X2

ADE-10H

100817

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+0	26	2	22	3	37	28	53	26	66
1	-	29	+0	42	14	26	38	40	32	59	42	56
2	93	56	39	62	42	56	39	55	41	57	53	71
3	>100	62	59	63	56	65	50	63	65	67	66	76
4	>100	86	74	86	74	88	69	80	71	79	71	80
5	>100	>92	>92	>92	88	>92	82	>92	82	89	87	>92
6	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 700.1 MHz; -1.00 dBm.
LO IN: 730.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; -8.04 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	33	14	35	16	46	34	55	36	71
1	-	32	+0	37	14	29	37	39	42	63	58	64
2	72	46	31	54	31	51	30	47	32	68	52	68
3	>100	46	41	51	45	50	36	48	51	58	46	71
4	>100	68	57	62	49	80	51	58	49	60	53	64
5	>100	72	74	68	55	61	52	63	50	61	66	64
6	>100	82	67	87	70	73	60	76	56	67	57	66
7	>100	93	76	91	85	77	83	77	78	72	66	71
8	>100	98	83	88	89	86	71	83	68	82	71	73
9	>100	>102	>102	97	95	97	87	83	79	80	76	78
10	>100	>102	>102	>102	101	91	95	93	85	84	83	84
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 700.1 MHz; 9.00 dBm.
LO IN: 730.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; 1.97 dBm



- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ADE-10H
100817
Page 3 of 3




CD541
CD542
CD636
CD637

Outline Dimensions

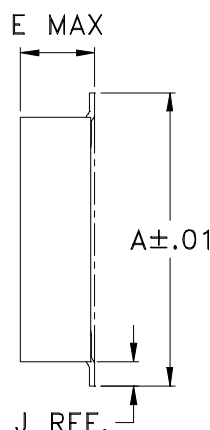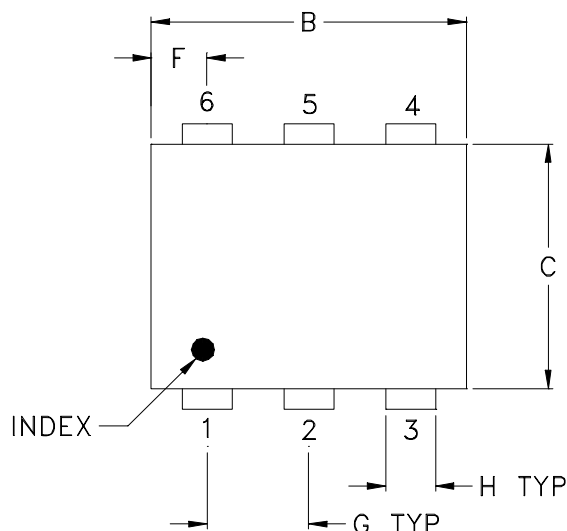

PCB Land Pattern

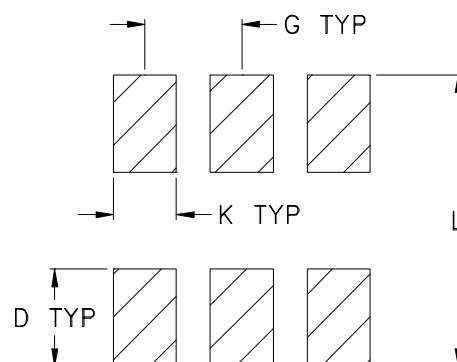

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

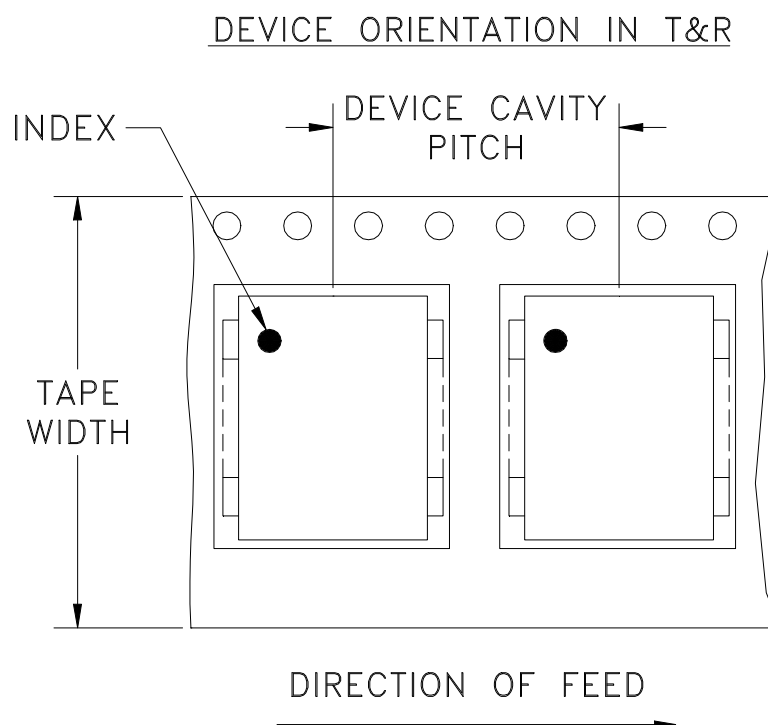

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ
A	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL

SUGGESTED MOUNTING CONFIGURATION
FOR CD541/542/636/637 CASE STYLES,
"jv", "ju", "jw" PIN CONNECTIONS

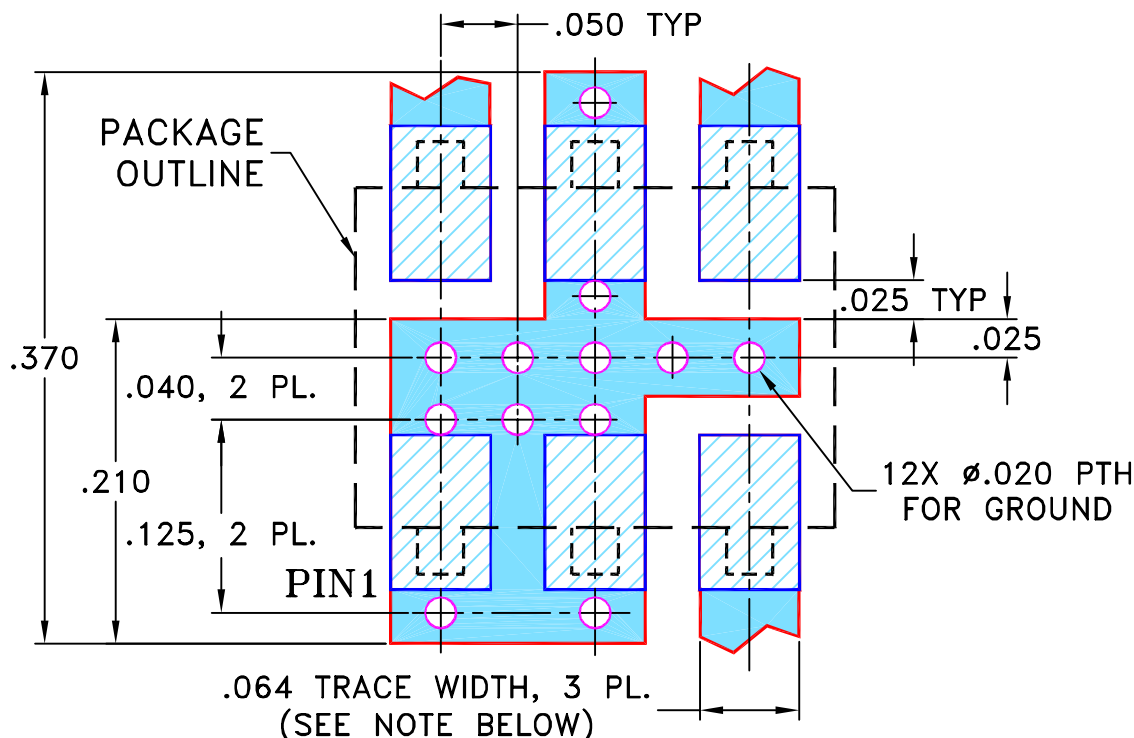

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$ 

INITIALS

DATE

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, jv/ju/jw, CD541/542/636/637, ADE, TB-02

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-051

REV:

A

FILE:

98PL051

SCALE:

8:1

SHEET:

1 OF 1



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit


For Pin Connections refer to Data Sheet of the DUT

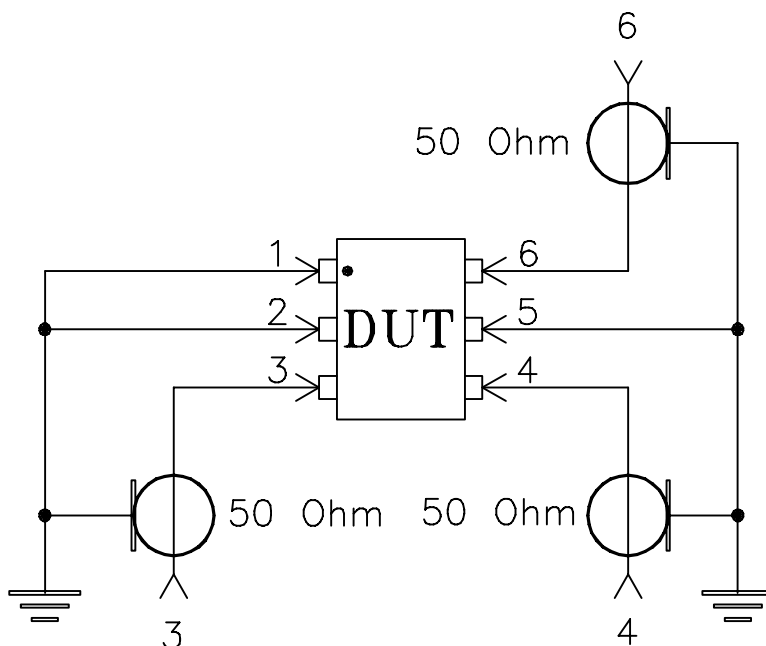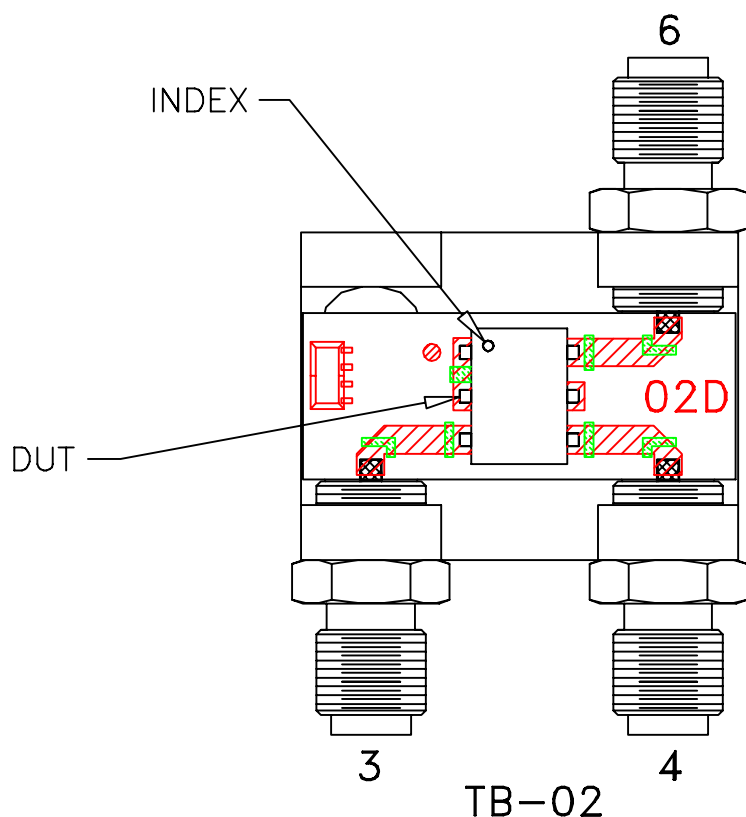

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215