

Surface Mount

Dual Matched MMIC Amplifiers

NEW!

MEIRA-533

50Ω High Dynamic Range DC to 4 GHz

Features

- Two matched amplifiers in one package
- InGaP HBT IF and RF amplifier
- frequency range, DC to 4 GHz
- high gain, 20.5 dB typ. at 100 MHz
- up to +17.9 dBm typ. output power at 100 MHz
- high IP3, +35 dBm at 100 MHz
- low noise figure, 3.5 dB typ.
- low thermal resistance
- transient protected
- patent pending
- useable as balanced and push pull amplifier



CASE STYLE: DL805
PRICE: \$ 3.40 ea. QTY (25)

Applications

- cellular
- catv
- VHF & UHF communication receivers & transmitters

Electrical Specifications @25°C

Freq.* (GHz)	Gain, dB Typical A1, A2						Maximum Power (dBm)					Dynamic Range				VSWR (:1) Typ.		Maximum Rating**		DC Operating Power Pin 5, Pin 8				Thermal Resistance	matching ¹						
																									Amplitude Unbalance between 2 amps (dB)			Phase Unbalance between 2 amps (deg.)			
	over frequency, GHz						Output (1 dB Comp.) Typ.					IP3 (dBm) Typ.										θjc, typ. °C/W	DC-2.2 GHz Typ. Max.		2.2-4 GHz Typ. Max.		DC-2.2 GHz Typ.		2.2-4 GHz Typ.		
	f ₋ f _u	0.1	1	2	3	4	Min.@ 2GHz	0.1 GHz	1.0 GHz	2.0 GHz	Min.@ 1GHz	Input (no dmg.)	NF (dB) Typ.	0.1 GHz	0.5 GHz	1.0 GHz	In	Out	I mA	P mW	Current (mA)	Typ	Volt Min		Max						
DC-4	20.5	20	18.8	17.5	16	16	17.9	17.5	16.7	16.5	13	3.5	35	34	33	1.4	1.5	120	650	65	4.9	4.2	5.5	133	.05	0.3	0.1	0.5	0.7	2.0	

* Guaranteed specification DC-4GHz. Low frequency cutoff determined by external coupling capacitors.

** Permanent damage may occur if any of these limits are exceeded.

These ratings are not intended for continuous normal operation. Reliability predictions and normal operating conditions are applicable at current specified.

1. For test method, see application note AN-60-032

Pin Connections

PORT

RF IN 1	1
RF OUT 1	8
RF IN 2	4
RF OUT 2	5
DC 1	8
DC 2	5
GROUND	2,3,6,7 and paddle


Maximum Ratings²

Operating Case Temperature -45°C to 85°C


Storage Temperature -55°C to 100°C

2. See application note AN-60-032 for adequate heat sinking of paddle.


typical biasing configuration

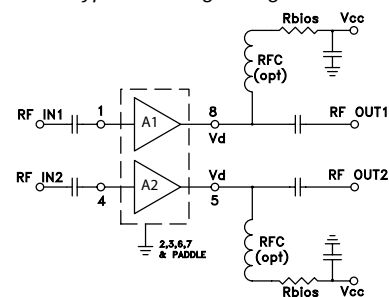

Outline Drawing

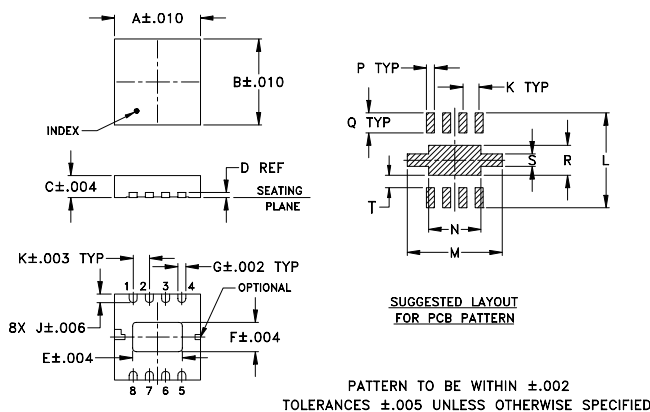

Demo Board MCL P/N: TB-294 Suggested PCB Layout (PL-165)

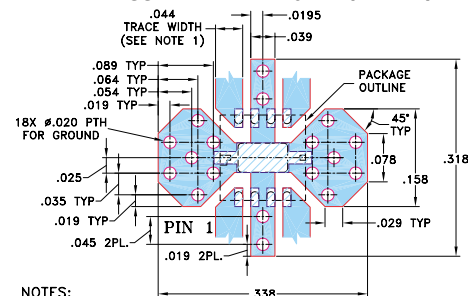

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .020 ± .0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.128	.128	.035	.008	.080	.047	.013	—	.014	.026	.158	.158	.084	.013	.030	.048	.020	.025	grams
3.25	3.25	0.90	0.20	2.03	1.19	0.33	—	0.36	0.66	4.01	4.01	2.13	0.33	0.76	1.22	0.51	0.64	.02



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M94145
MEIRA-533
ED-11699/5
WZ/TD/CP
040927