

Non-Catalog Model

Frequency Mixer

LRMS-1WJ

Level 7 (LO Power +7 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ569

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2		750	MHz
	RF (fL to fU)	2		750	MHz
	IF	0		750	MHz
Conversion Loss	mid band		5.8	7.5	dB
	Total Range			8.5	dB
LO-RF Isolation	Low Range	45	70		dB
	Mid Range	28	45		dB
	Upper Range	22	38		dB
LO-IF Isolation	Low Range	45	60		dB
	Mid Range	25	40		dB
	Upper Range	20	30		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Phase detection, positive polarity.
Aqueous washable.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6

Electrical Schematics

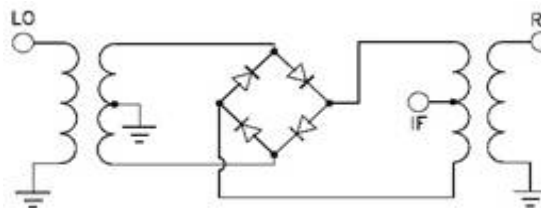

Frequency Mixer

LRMS-1WJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+4	+7	+10	+4	+7	+10	+4	+7	+10						
2.0	32.0	6.44	6.15	6.06	10.1	40.1	18.99	21.08	21.36	10.1	40.1	1.31	1.16	0.78
4.0	34.0	6.24	5.93	5.84	30.1	60.1	17.10	17.52	17.80	30.1	60.1	1.32	1.08	0.89
5.0	35.0	6.20	5.89	5.82	50.1	80.1	18.40	17.17	17.79	50.1	80.1	1.45	1.04	0.80
10.0	40.0	6.24	5.90	5.79	70.1	100.1	19.15	18.28	18.28	70.1	100.1	1.37	1.13	0.77
30.1	60.1	5.99	5.66	5.50	110.1	140.1	16.26	16.71	23.72	110.1	140.1	1.33	1.04	0.76
50.1	80.1	6.01	5.69	5.57	130.1	160.1	16.22	16.80	29.19	130.1	160.1	1.33	1.06	0.73
70.1	100.1	6.00	5.73	5.58	170.1	200.1	15.92	19.23	25.28	170.1	200.1	1.26	1.01	0.66
110.1	140.1	6.11	5.78	5.68	190.1	220.1	17.24	19.70	24.84	190.1	220.1	1.30	0.93	0.70
170.1	200.1	6.13	5.83	5.72	230.1	260.1	17.17	19.18	18.74	230.1	260.1	1.35	0.93	0.77
190.1	220.1	6.11	5.84	5.72	250.1	280.1	18.49	20.29	19.40	250.1	280.1	1.23	0.95	0.72
230.1	260.1	6.07	5.84	5.74	290.1	320.1	17.01	23.23	24.68	290.1	320.1	1.25	0.84	0.71
250.1	280.1	6.09	5.82	5.72	310.1	340.1	24.46	20.51	21.56	310.1	340.1	1.27	1.02	0.72
290.1	320.1	6.10	5.84	5.72	350.1	380.1	15.36	16.34	18.49	350.1	380.1	1.34	0.90	0.74
310.1	340.1	6.09	5.84	5.75	370.1	400.1	13.41	15.40	16.38	370.1	400.1	1.27	0.90	0.65
350.1	380.1	6.03	5.76	5.77	410.1	440.1	16.27	14.87	18.05	410.1	440.1	1.20	0.76	0.71
370.1	400.1	6.12	5.90	5.80	430.1	460.1	18.83	18.71	22.25	430.1	460.1	1.03	0.82	0.67
410.1	440.1	6.25	6.01	5.87	470.1	500.1	16.22	21.29	19.12	470.1	500.1	1.18	0.90	0.73
430.1	460.1	6.23	5.96	5.79	490.1	520.1	16.13	19.67	19.17	490.1	520.1	1.25	0.96	0.76
470.1	500.1	6.33	6.07	5.95	530.1	560.1	17.83	21.11	18.53	530.1	560.1	1.15	0.81	0.57
490.1	520.1	6.33	6.08	5.96	550.1	580.1	13.87	16.63	19.08	550.1	580.1	1.23	0.90	0.63
550.1	580.1	6.40	6.13	6.02	590.1	620.1	12.50	14.05	16.44	590.1	620.1	1.16	0.98	0.63
590.1	620.1	6.52	6.30	6.20	610.1	640.1	11.02	13.11	16.57	610.1	640.1	1.33	0.82	0.61
610.1	640.1	6.60	6.39	6.26	650.1	680.1	9.26	11.29	13.80	650.1	680.1	1.63	1.17	0.98
650.1	680.1	6.80	6.56	6.44	670.1	700.1	8.39	10.64	14.74	670.1	700.1	1.61	1.19	0.93
670.1	700.1	6.86	6.63	6.52	710.1	740.1	7.36	9.46	12.54	710.1	740.1	1.63	1.29	1.05
710.1	740.1	6.97	6.76	6.60	730.1	760.1	6.98	9.16	11.98	730.1	760.1	1.72	1.49	1.15
730.1	760.1	7.09	6.84	6.67	770.1	800.1	6.92	9.57	13.01	770.1	800.1	1.86	1.42	1.20
770.1	800.1	7.22	6.93	6.75	790.1	820.1	7.19	10.04	14.21	790.1	820.1	1.80	1.53	1.27
790.1	820.1	7.25	6.97	6.77	830.1	860.1	8.20	12.22	16.11	830.1	860.1	1.94	1.62	1.43
830.1	860.1	7.42	7.09	6.89	850.1	880.1	9.03	12.84	20.16	850.1	880.1	2.03	1.69	1.43
850.1	880.1	7.48	7.12	6.96	890.1	920.1	10.59	16.29	27.84	890.1	920.1	1.97	1.77	1.47
890.1	920.1	7.63	7.20	7.01	910.1	940.1	11.48	15.51	18.06	910.1	940.1	2.11	1.73	1.62
910.1	940.1	7.83	7.37	7.14	950.1	980.1	13.81	20.68	19.28	950.1	980.1	1.90	1.71	1.39
950.1	980.1	8.19	7.66	7.38	970.1	1000.1	14.67	20.93	19.37	970.1	1000.1	1.80	1.64	1.28
970.1	1000.1	8.50	7.85	7.57	1010.1	1040.1	12.90	15.62	16.51	1010.1	1040.1	1.50	1.31	1.18
1010.1	1040.1	8.95	8.35	8.04	1030.1	1060.1	11.17	14.11	14.57	1030.1	1060.1	1.37	1.07	0.91
1070.1	1100.1	9.70	9.07	8.69	1070.1	1100.1	8.87	11.15	12.80	1070.1	1100.1	1.20	1.01	0.78
1090.1	1120.1	9.92	9.25	8.91	1090.1	1120.1	8.38	10.79	12.15	1090.1	1120.1	1.16	0.89	0.87
1130.1	1160.1	10.39	9.77	9.44	1130.1	1160.1	7.80	9.46	12.12	1130.1	1160.1	1.06	0.94	0.81
1150.1	1180.1	10.70	10.01	9.62	1150.1	1180.1	7.94	9.66	11.57	1150.1	1180.1	1.04	0.90	0.78

REV. X2
LRMS-1WJ
100817
Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

LRMS-1WJ

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=375.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
365.0	10.1	6.03	10.0	20.1	5.78	740.0	10.1	7.31
356.1	19.0	6.02	28.7	38.8	5.64	721.3	28.8	7.30
347.3	27.9	5.99	47.4	57.5	5.62	702.6	47.5	7.22
338.4	36.7	5.97	66.2	76.3	5.68	683.8	66.3	7.15
329.5	45.6	5.94	84.9	95.0	5.69	665.1	85.0	7.09
320.6	54.5	5.90	103.6	113.7	5.75	646.4	103.7	7.05
311.8	63.4	5.89	122.3	132.4	5.71	627.7	122.4	7.04
302.9	72.2	5.87	141.0	151.1	5.75	609.0	141.1	6.99
294.0	81.1	5.84	159.7	169.8	5.78	590.3	159.8	6.94
285.1	90.0	5.84	178.5	188.6	5.79	571.5	178.6	6.91
276.3	98.9	5.83	197.2	207.3	5.81	552.8	197.3	6.94
267.4	107.7	5.82	215.9	226.0	5.85	534.1	216.0	6.90
258.5	116.6	5.80	234.6	244.7	5.85	515.4	234.7	6.90
249.6	125.5	5.82	253.3	263.4	5.89	496.7	253.4	6.86
240.8	134.4	5.78	272.1	282.2	5.89	477.9	272.2	6.84
231.9	143.2	5.77	290.8	300.9	5.92	459.2	290.9	6.86
223.0	152.1	5.77	309.5	319.6	5.93	440.5	309.6	6.96
214.1	161.0	5.77	328.2	338.3	5.94	421.8	328.3	6.94
205.3	169.9	5.77	346.9	357.0	5.91	403.1	347.0	6.91
196.4	178.7	5.75	365.6	375.7	5.94	384.4	365.7	6.91
187.5	187.6	5.32	384.4	394.5	5.96	365.6	384.5	6.98
178.6	196.5	5.75	403.1	413.2	5.92	346.9	403.2	6.99
169.8	205.4	5.74	421.8	431.9	5.98	328.2	421.9	6.99
160.9	214.2	5.73	440.5	450.6	6.01	309.5	440.6	6.99
152.0	223.1	5.78	459.2	469.3	6.00	290.8	459.3	6.95
143.1	232.0	5.77	477.9	488.0	6.06	272.1	478.0	6.94
134.3	240.9	5.77	496.7	506.8	6.12	253.3	496.8	6.93
125.4	249.7	5.78	515.4	525.5	6.14	234.6	515.5	6.90
116.5	258.6	5.80	534.1	544.2	6.17	215.9	534.2	6.88
107.6	267.5	5.79	552.8	562.9	6.21	197.2	552.9	6.88
98.8	276.4	5.79	571.5	581.6	6.24	178.5	571.6	6.90
89.9	285.2	5.77	590.3	600.4	6.20	159.7	590.4	6.93
81.0	294.1	5.66	609.0	619.1	6.24	141.0	609.1	6.94
72.1	303.0	5.64	627.7	637.8	6.20	122.3	627.8	6.92
63.3	311.9	5.77	646.4	656.5	6.16	103.6	646.5	6.90
54.4	320.7	5.80	665.1	675.2	6.15	84.9	665.2	6.91
45.5	329.6	5.76	683.8	693.9	6.19	66.2	683.9	6.91
36.6	338.5	5.80	702.6	712.7	6.20	47.4	702.7	6.86
18.9	356.2	5.85	721.3	731.4	6.14	28.7	721.4	6.88
10.0	365.1	5.72	740.0	750.1	6.08	10.0	740.1	6.78

REV. X2
LRMS-1WJ
100817
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

LRMS-1WJ

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
2.0	76.36	77.45	78.57	61.46	62.05	62.37
4.0	76.01	77.30	78.72	61.31	61.60	61.92
5.0	75.18	76.89	78.20	61.28	61.49	61.60
10.0	71.36	74.36	77.17	60.46	60.26	59.90
30.1	61.83	62.72	62.90	56.35	52.56	52.15
50.1	57.32	58.63	58.28	52.53	49.13	47.92
70.1	54.12	54.62	54.97	49.58	46.69	45.41
110.1	49.78	50.12	50.71	45.90	43.60	42.25
170.1	45.44	45.97	46.55	42.64	40.71	39.21
190.1	44.34	44.95	45.35	41.99	40.01	38.56
230.1	42.59	43.13	43.53	40.23	38.45	36.94
250.1	41.72	42.10	42.35	39.41	37.82	36.44
290.1	40.51	41.02	41.27	37.64	36.35	35.13
310.1	39.79	40.31	40.60	36.78	35.67	34.54
350.1	38.21	38.52	38.76	35.13	34.39	33.44
370.1	37.69	37.92	38.19	34.14	33.63	32.76
410.1	37.07	37.25	37.46	32.32	32.29	31.89
430.1	37.05	37.27	37.37	31.18	31.20	30.98
470.1	36.77	36.98	36.94	29.84	29.85	29.71
490.1	36.50	36.66	36.56	29.28	29.30	29.19
550.1	35.15	35.11	34.93	28.08	28.12	28.01
590.1	34.07	34.26	34.29	27.60	27.83	27.55
610.1	33.41	33.69	33.81	27.18	27.58	27.25
650.1	32.57	33.04	33.36	26.26	27.10	26.87
670.1	32.19	32.73	33.12	25.67	26.84	26.91
710.1	31.67	32.31	32.84	24.57	25.97	26.53
730.1	31.65	32.37	32.97	23.99	25.47	26.18
770.1	31.60	32.41	33.07	23.09	24.52	25.41
790.1	31.59	32.42	33.04	22.57	23.91	24.78
830.1	31.40	32.12	32.51	21.64	22.83	23.64
850.1	31.12	31.69	31.96	21.17	22.25	23.05
890.1	30.02	30.33	30.44	20.56	21.49	22.26
910.1	29.51	29.73	29.79	20.11	20.98	21.75
950.1	28.43	28.40	28.35	19.86	20.63	21.38
970.1	27.88	27.75	27.65	19.71	20.45	21.18
1010.1	26.94	26.64	26.50	19.72	20.45	21.17
1070.1	26.04	25.57	25.34	19.86	20.80	21.59
1090.1	25.70	25.25	25.03	19.56	20.64	21.49
1130.1	25.05	24.66	24.43	19.24	20.60	21.64
1150.1	24.64	24.32	24.12	19.11	20.64	21.83

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	34.96	34.93	33.54
30.1	60.1	35.76	40.36	36.20
50.1	80.1	34.37	33.30	33.89
70.1	100.1	31.98	31.62	31.60
110.1	140.1	28.28	28.34	28.40
130.1	160.1	27.18	27.18	27.41
170.1	200.1	25.73	25.79	25.86
190.1	220.1	25.36	25.48	25.50
230.1	260.1	24.61	24.69	24.81
250.1	280.1	24.61	24.59	24.69
290.1	320.1	24.92	25.03	25.16
310.1	340.1	24.77	25.21	25.58
350.1	380.1	24.77	25.29	25.64
370.1	400.1	24.81	25.14	25.29
410.1	440.1	25.07	25.10	25.09
430.1	460.1	25.32	25.41	25.44
470.1	500.1	24.09	24.59	25.05
490.1	520.1	22.84	23.45	24.03
530.1	560.1	20.10	20.59	20.98
550.1	580.1	18.81	19.18	19.55
590.1	620.1	16.89	17.09	17.30
610.1	640.1	16.14	16.28	16.42
650.1	680.1	15.05	15.08	15.16
670.1	700.1	14.60	14.61	14.69
710.1	740.1	13.84	13.83	13.89
730.1	760.1	13.54	13.49	13.54
770.1	800.1	13.05	13.00	13.03
790.1	820.1	12.85	12.81	12.86
830.1	860.1	12.53	12.54	12.68
850.1	880.1	12.44	12.51	12.67
890.1	920.1	12.27	12.45	12.74
910.1	940.1	12.20	12.44	12.77
950.1	980.1	11.93	12.25	12.64
970.1	1000.1	11.73	12.04	12.41
1010.1	1040.1	11.42	11.63	11.84
1030.1	1060.1	11.28	11.47	11.65
1070.1	1100.1	11.07	11.31	11.49
1090.1	1120.1	10.94	11.20	11.38
1130.1	1160.1	10.54	10.83	11.00
1150.1	1180.1	10.30	10.58	10.74

REV. X2
LRMS-1WJ
100817
Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

LRMS-1WJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
2.0	32.0	1.68	2.41	3.33
4.0	34.0	1.64	2.36	3.28
5.0	35.0	1.70	2.47	3.42
10.0	40.0	1.64	2.39	3.32
30.1	60.1	1.02	1.06	1.09
50.1	80.1	1.07	1.04	1.10
70.1	100.1	1.06	1.03	1.10
110.1	140.1	1.04	1.11	1.15
130.1	160.1	1.07	1.11	1.16
170.1	200.1	1.01	1.08	1.13
190.1	220.1	1.06	1.12	1.17
230.1	260.1	1.08	1.13	1.19
250.1	280.1	1.09	1.15	1.21
290.1	320.1	1.14	1.21	1.26
310.1	340.1	1.14	1.21	1.28
350.1	380.1	1.16	1.24	1.30
370.1	400.1	1.17	1.25	1.30
410.1	440.1	1.19	1.26	1.31
430.1	460.1	1.23	1.29	1.34
470.1	500.1	1.29	1.37	1.42
490.1	520.1	1.33	1.41	1.47
550.1	580.1	1.43	1.53	1.61
590.1	620.1	1.46	1.56	1.63
610.1	640.1	1.47	1.57	1.63
650.1	680.1	1.47	1.56	1.62
670.1	700.1	1.46	1.54	1.59
710.1	740.1	1.44	1.51	1.56
730.1	760.1	1.43	1.48	1.53
770.1	800.1	1.43	1.47	1.50
790.1	820.1	1.44	1.47	1.52
830.1	860.1	1.51	1.54	1.58
850.1	880.1	1.58	1.61	1.64
890.1	920.1	1.76	1.78	1.81
910.1	940.1	1.85	1.87	1.90
950.1	980.1	2.10	2.09	2.10
970.1	1000.1	2.22	2.21	2.21
1010.1	1040.1	2.44	2.42	2.42
1070.1	1100.1	2.79	2.75	2.73
1090.1	1120.1	2.86	2.82	2.80
1130.1	1160.1	3.07	3.03	2.99
1150.1	1180.1	3.08	3.05	3.02

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
2.0	1.14	1.16	1.20
4.0	1.06	1.10	1.15
5.0	1.01	1.08	1.14
10.0	1.03	1.09	1.14
30.1	1.86	2.71	3.73
50.1	1.86	2.70	3.76
70.1	1.81	2.59	3.60
110.1	1.82	2.59	3.54
130.1	1.84	2.64	3.62
170.1	1.81	2.59	3.56
190.1	1.83	2.61	3.57
230.1	1.87	2.65	3.61
250.1	1.84	2.60	3.53
290.1	1.87	2.61	3.53
310.1	1.89	2.63	3.55
350.1	1.90	2.66	3.57
370.1	1.94	2.71	3.63
410.1	1.96	2.71	3.60
430.1	1.97	2.70	3.58
470.1	2.01	2.73	3.61
490.1	1.98	2.68	3.52
550.1	2.04	2.74	3.60
590.1	2.04	2.72	3.53
610.1	2.07	2.75	3.55
650.1	2.12	2.80	3.60
670.1	2.09	2.73	3.50
710.1	2.11	2.74	3.50
730.1	2.13	2.78	3.56
770.1	2.12	2.73	3.47
790.1	2.12	2.73	3.47
830.1	2.14	2.75	3.48
850.1	2.12	2.69	3.40
890.1	2.16	2.72	3.40
910.1	2.18	2.74	3.43
950.1	2.22	2.76	3.42
970.1	2.26	2.80	3.45
1010.1	2.31	2.82	3.47
1070.1	2.35	2.82	3.43
1090.1	2.35	2.81	3.41
1130.1	2.39	2.83	3.42
1150.1	2.41	2.86	3.46

IF (OUT) (MHz)	IF VSWR @LO=750.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
5.0	1.39	1.24	1.14
10.0	1.40	1.25	1.15
28.8	1.92	1.69	1.48
47.5	1.92	1.65	1.43
66.3	1.98	1.72	1.51
85.0	1.97	1.71	1.49
103.7	1.92	1.70	1.51
122.4	1.92	1.72	1.53
141.1	1.95	1.71	1.54
159.8	2.03	1.79	1.58
178.6	2.01	1.77	1.60
197.3	1.99	1.78	1.61
216.0	1.96	1.77	1.62
234.7	1.95	1.77	1.60
253.4	1.96	1.77	1.62
272.2	1.96	1.78	1.64
290.9	1.92	1.77	1.65
309.6	1.91	1.78	1.67
328.3	1.95	1.81	1.70
347.0	1.95	1.83	1.72
365.7	1.93	1.83	1.72
384.5	1.93	1.84	1.76
403.2	1.93	1.85	1.78
421.9	1.93	1.86	1.78
440.6	1.93	1.87	1.81
459.3	1.93	1.88	1.83
478.0	1.93	1.88	1.84
496.8	1.93	1.89	1.87
515.5	1.93	1.90	1.88
534.2	1.93	1.92	1.90
552.9	1.95	1.93	1.93
571.6	1.95	1.95	1.95
590.4	1.97	1.96	1.97
609.1	1.97	1.97	1.98
627.8	1.98	1.97	1.99
646.5	2.00	1.99	2.00
665.2	2.01	2.00	2.02
683.9	2.01	2.00	2.02
702.7	2.02	2.00	2.00
721.4	2.01	1.99	2.01
740.1	2.01	1.98	2.01

REV. X2
LRMS-1WJ
100817
Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	23	7	26	13	27	26	39	41	42
1	-	19	0	26	11	32	18	37	40	41	48	37
2	112	61	47	56	46	64	45	54	50	70	60	63
3	110	69	61	69	63	68	58	72	66	73	82	74
4	126	90	89	88	92	84	94	92	83	88	93	94
5	114	105	93	95	96	94	83	101	94	101	97	113
6	120	110	100	106	101	97	87	96	105	96	104	105
7	115	113	116	126	104	96	105	89	105	97	93	98
8	112	119	113	106	110	110	102	89	84	87	98	95
9	112	104	105	118	110	106	104	109	96	91	99	98
10	114	119	107	125	116	99	112	101	103	96	83	89
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 370.1 MHz; -14.00 dBm.

LO IN: 400.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -20.05 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	32	19	43	25	40	39	52	60	63
1	-	19	0	28	12	32	19	41	41	47	52	45
2	112	53	39	52	39	56	40	50	45	55	52	66
3	121	56	44	54	46	51	40	67	44	54	61	57
4	114	62	69	63	58	63	56	77	50	62	60	77
5	113	83	64	66	59	71	56	79	56	67	62	76
6	123	95	73	81	77	81	77	83	72	85	90	81
7	119	81	90	85	72	76	73	79	75	78	70	85
8	113	98	109	97	91	90	93	93	98	89	82	94
9	109	99	101	96	100	93	84	86	84	86	84	90
10	113	99	103	108	112	116	96	94	94	98	97	102
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 370.1 MHz; -4.00 dBm.

LO IN: 400.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -10.06 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X2

LRMS-1WJ

100817


Page 5 of 5

Frequency Mixer


LRMS-1WJ

Typical Performance Curves


Conversion Loss @ IF=30MHz

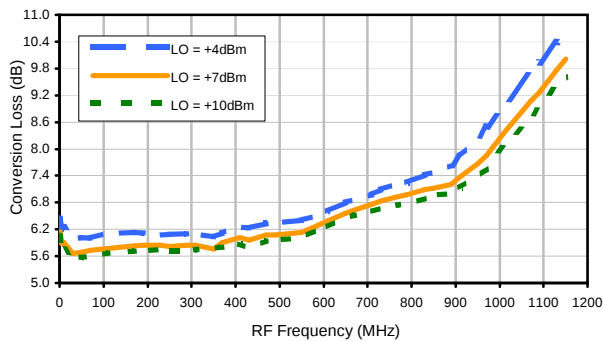


Conversion Loss vs. IF @ RF=375.1MHz

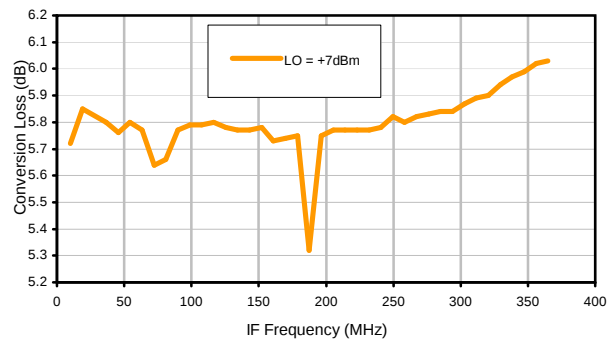


Conversion Loss vs. IF @ RF=10.1MHz

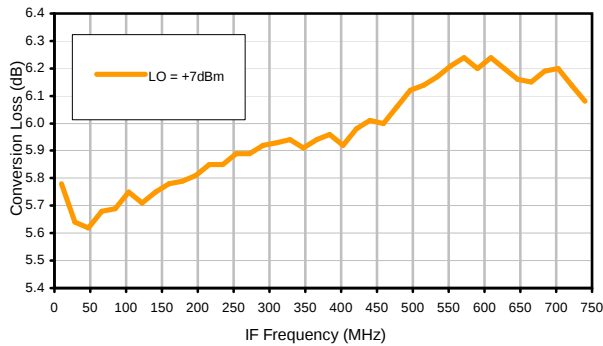


Conversion Loss vs. IF @ RF=750.1MHz

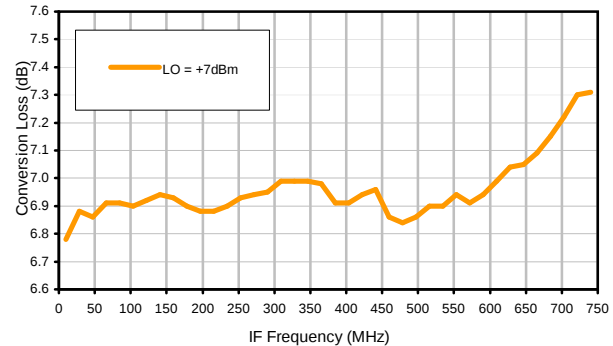

IP3 Input

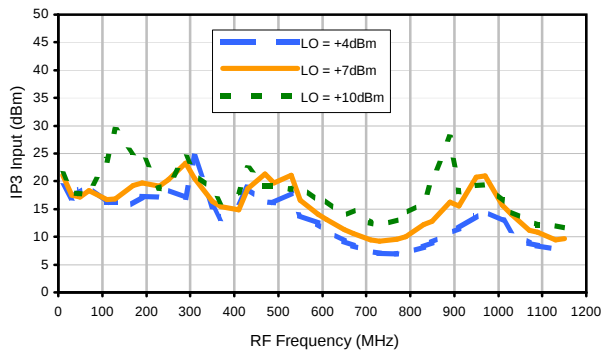

Compression @ RF IN=+1dBm

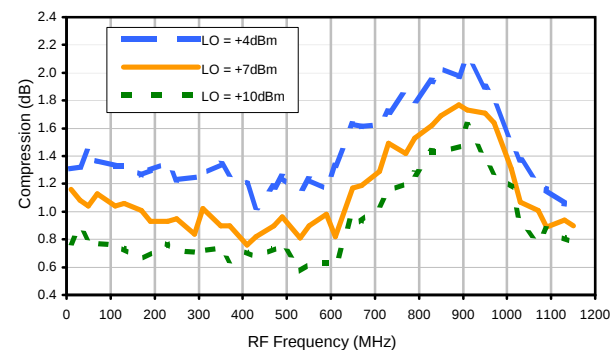

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




REV. X2
LRMS-1WJ
100817
Page 1 of 3

Typical Performance Curves


LO-RF Isolation

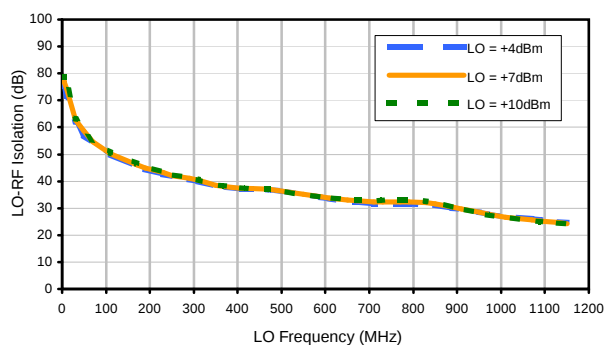


LO-IF Isolation

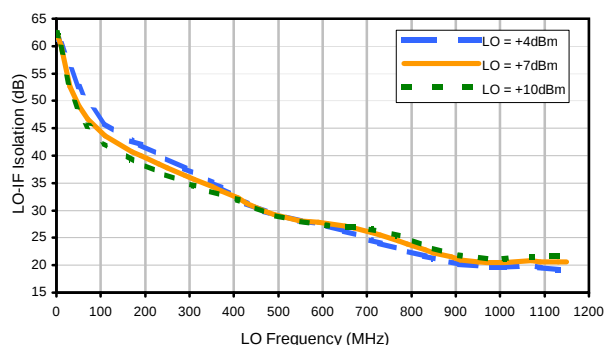


RF-IF Isolation

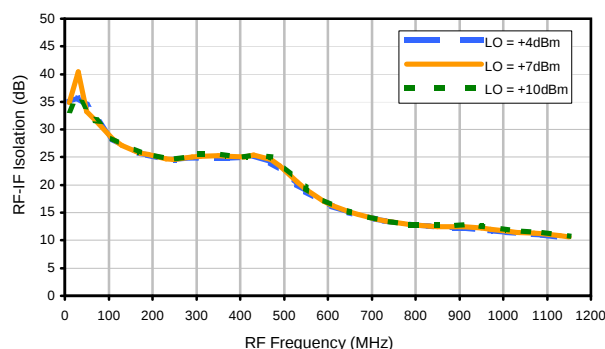


RF VSWR

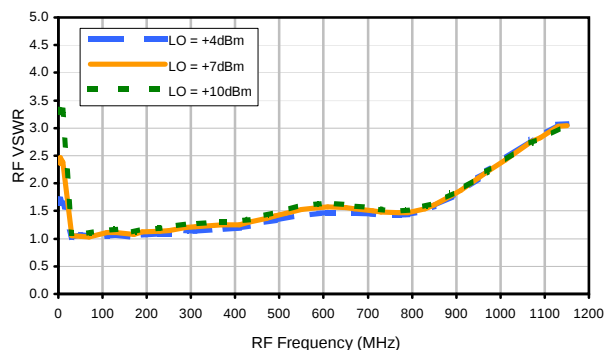

LO VSWR

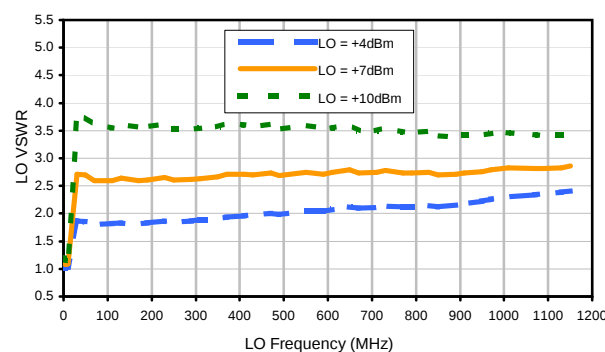

IF VSWR

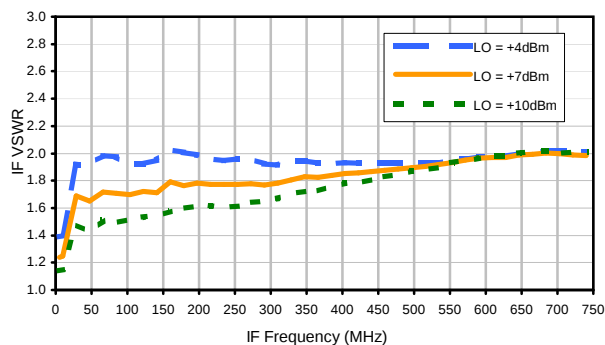

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	23	7	26	13	27	26	39	41	42
1	-	19	0	26	11	32	18	37	40	41	48	37
2	112	61	47	56	46	64	45	54	50	70	60	63
3	110	69	61	69	63	68	58	72	66	73	82	74
4	126	90	89	88	92	84	94	92	83	88	93	94
5	114	105	93	95	96	94	83	101	94	101	97	113
6	120	110	100	106	101	97	87	96	105	96	104	105
7	115	113	116	126	104	96	105	89	105	97	93	98
8	112	119	113	106	110	110	102	89	84	87	98	95
9	112	104	105	118	110	106	104	109	96	91	99	98
10	114	119	107	125	116	99	112	101	103	96	83	89
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -14.00 dBm.
LO IN: 400.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -20.05 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	32	19	43	25	40	39	52	60	63
1	-	19	0	28	12	32	19	41	41	47	52	45
2	112	53	39	52	39	56	40	50	45	55	52	66
3	121	56	44	54	46	51	40	67	44	54	61	57
4	114	62	69	63	58	63	56	77	50	62	60	77
5	113	83	64	66	59	71	56	79	56	67	62	76
6	123	95	73	81	77	81	77	83	72	85	90	81
7	119	81	90	85	72	76	73	79	75	78	70	85
8	113	98	109	97	91	90	93	93	98	89	82	94
9	109	99	101	96	100	93	84	86	84	86	84	90
10	113	99	103	108	112	116	96	94	94	98	97	102
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -4.00 dBm.
LO IN: 400.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.06 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




REV. X2
LRMS-1WJ
100817
Page 3 of 3

Case Style


QQQ

QQQ569 (waterproof)

Outline Dimensions

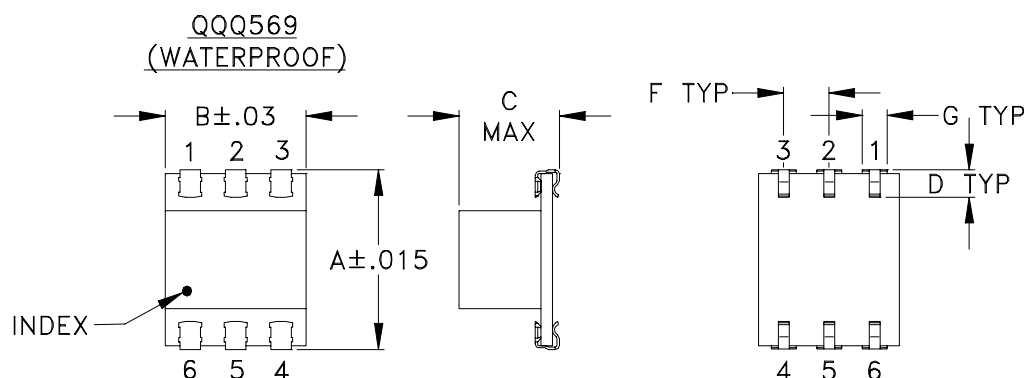

PCB Land Pattern

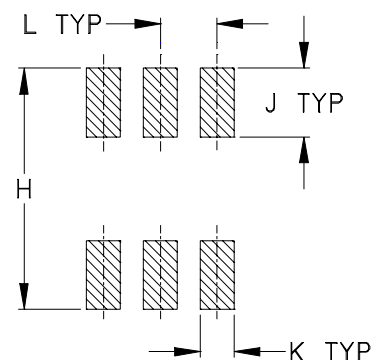

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT, GRAM
QQQ569	.390 (9.90)	.31 (7.87)	.225 (5.72)	.060 (1.52)	-	.100 (2.54)	.045 (1.14)	.420 (10.67)	.120 (3.05)	.060 (1.52)	.100 (2.54)	-	.50

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate.
 - For RoHS-5 Case Styles: Tin-Lead plate.

Mini-Circuits®


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F5

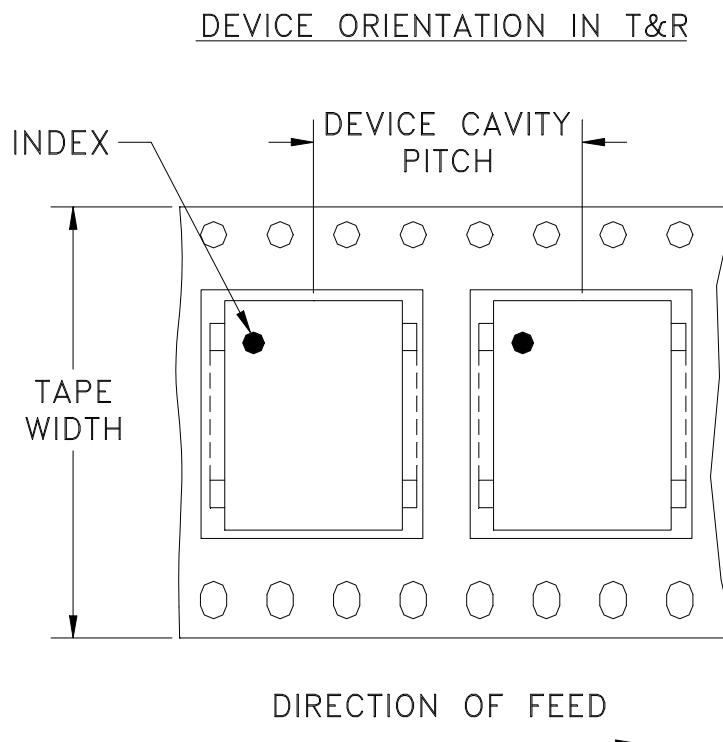

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

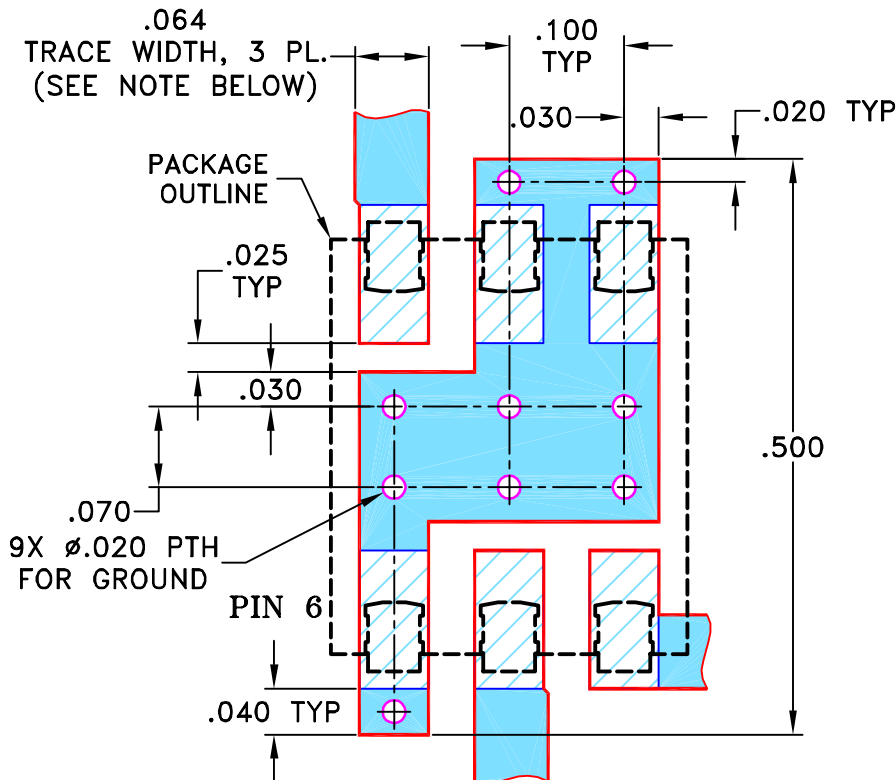

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$

APPROVED

DJ

08/02/02

3 PL DECIMALS $\pm$.005

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE:

98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

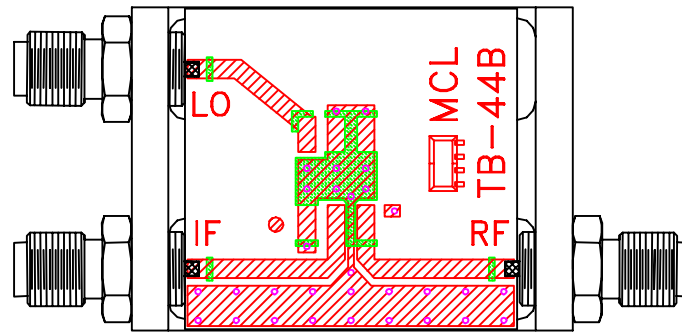


TB-44+

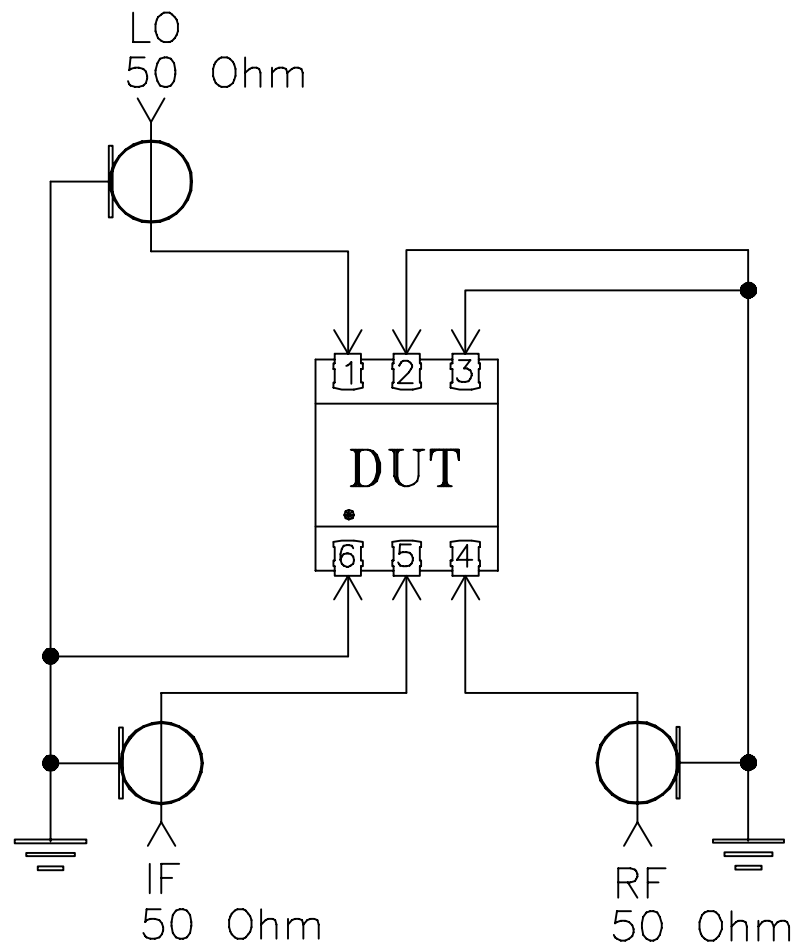

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®