HAND FLEX™

Coaxial Cable

086-6SBSM+

50Ω 6 inch DC to 18 GHz SMA Male to SMA Female Bulkhead

THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Insertion Loss, 0.47 dB to 18 GHz
- Excellent Return Loss, 27 dB to 18 GHz
- SMA-F bulkhead connector at one end
- Hand formable to almost any custom shape without special bending tools
- 6 mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

Model No.	086-6SBSM+
Case Style	KP1567-6
Connectors	SMA Male to SMA Female Bulkhead

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Bulkhead connector mounts on front panel of equipment racks
- Replacement for custom bent 0.086" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace systems
- Environmental and test chambers

PRODUCT OVERVIEW

The 086 SBSM Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems to equipment racks. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body. SMA-M connector has gold plated, brass center conductor and SMA Bulkhead female has gold plated BeCu center conductor.

KEY FEATURES

Feature	Advantages
Hand-Formable RF Cables	The 086 Series Hand-Flex™ cables are hand formable making them ideal for SMA male use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
SMA-F bulkhead connector at one end	Mounts directly on equipment racks eliminating need for bulkhead adapter, thereby improving reliability.
Tight Bend Radius	Capable of only 6 mm bend radius, the 086 Series Hand-Flex™ series is able to make connections in tight spaces making these cables ideal for dense system integration.
Excellent Return Loss	Supporting excellent return loss to 18 GHz, the 086 Series Hand-Flex™ Cables are ideally suited for inter-connecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: • 211 W at 0.5 GHz • 35 W at 18 GHz	Mini-Circuits 086 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path (power rating is at sea-level altitudes).
Built-in Anti-torque nut	Mini-Circuits 086 Series Hand-Flex™ cables include an anti-torque feature to support the straight SMA connector body during installation alleviating risk of stress to the connector/cable interface.

REV. C
ECO-017388
086-6SBSM+
MCL NY
260415

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Length[1]			6		inches
Insertion Loss	DC–2	—	0.12	0.4	dB
	2–6	—	0.21	0.6	
	6–10	—	0.34	0.8	
	10–18	—	0.47	1.1	
Return Loss	DC–2	23	40	—	dB
	2–6	23	39	—	
	6–10	17	32	—	
	10–18	16	27	—	

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS[2]

Parameter	Ratings
Operating Temperature	-55 °C to +105 °C
Storage Temperature	-55 °C to +105 °C
Power Handling at +25 °C, Sea Level	211 W at 0.5 GHz 150 W at 1 GHz 104 W at 2 GHz 59 W at 6 GHz 45 W at 10 GHz 35 W at 18 GHz

2. Permanent damage may occur if any of these limits are exceeded.


HAND FLEX™

Coaxial Cable

086-6SBSM+

50Ω 6 inch DC to 18 GHz SMA Male to SMA Female Bulkhead

CABLE CONSTRUCTION



Center Conductor: Silver Plated Copper Clad Steel


Dielectric: Solid PTFE

Outer Shield: Copper Braid, Tin Soaked

Jacket: FEP, Blue (Unjacketed cable also available upon request)

Connectors: Coupling Nut: Stainless Steel Passivated
Body: Stainless Steel Gold Plated
Center Pin: Brass, Gold Plated (SMA-M)
and BeCuB Gold Plated

OUTLINE DRAWING

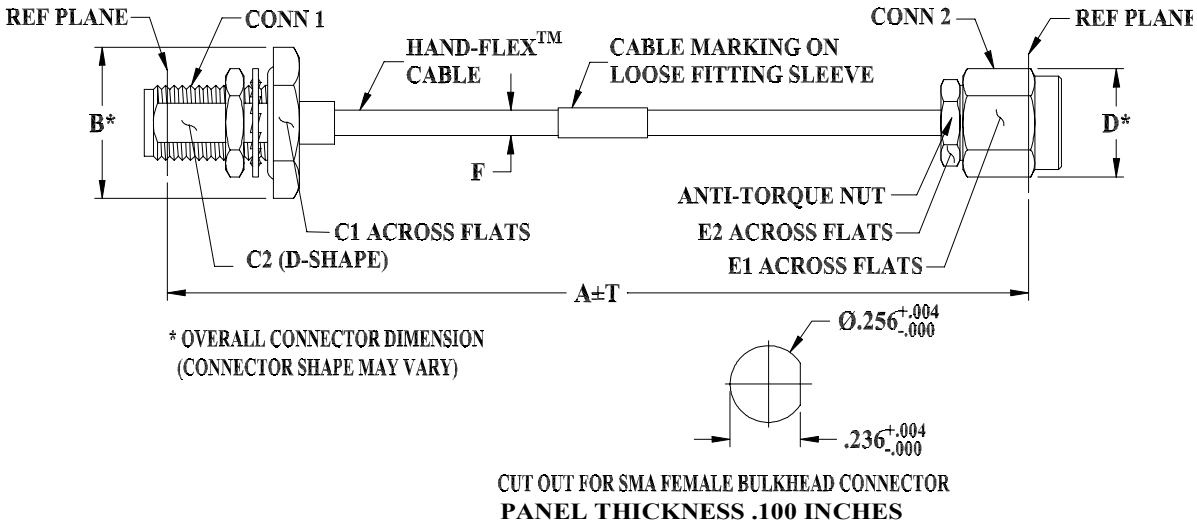

OUTLINE DIMENSIONS (Inch / mm)

A	B	C1	C2	D	E1	E2	F	T	wt
6.0	.51	.438	.232	.36	.313	.250	.108	0.05	grams
152.40	12.95	11.13	5.89	9.14	7.95	6.35	2.75	1.27	8.74

HAND FLEX™

Coaxial Cable


086-6SBSM+

50Ω 6 inch DC to 18 GHz SMA Male to SMA Female Bulkhead


TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMA Male	SMA Female Bulkhead
100	0.08	39.7	41.4
1000	0.19	37.5	43.7
1800	0.23	38.8	49.9
2000	0.25	35.8	38.7
4000	0.30	41.9	37.3
5000	0.34	30.5	28.6
6000	0.36	32.3	30.7
7000	0.38	38.5	34.9
8000	0.41	23.0	23.0
9000	0.44	23.6	23.5
10000	0.45	29.1	27.7
12000	0.51	23.5	27.7
14000	0.56	20.6	22.9
17069	0.66	24.7	26.4
18000	0.66	24.0	23.5

086-6SBSM+
INSERTION LOSS

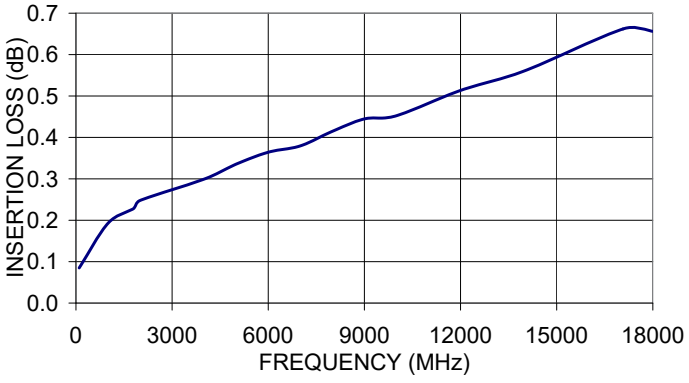

086-6SBSM+
RETURN LOSS

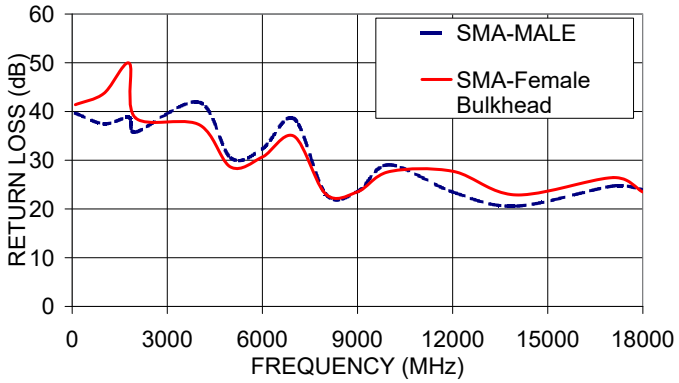


PROPER CABLE CONNECTION USING ANTI-TORQUE NUT

Mini-Circuits 086-series HandFlex™ interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.


TO PROPERLY TIGHTEN THE CABLE CONNECTOR:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

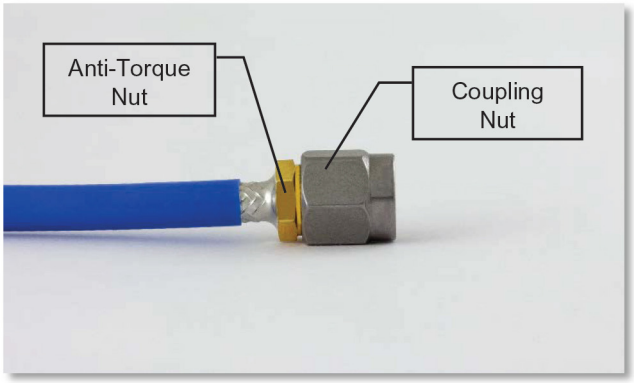

2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

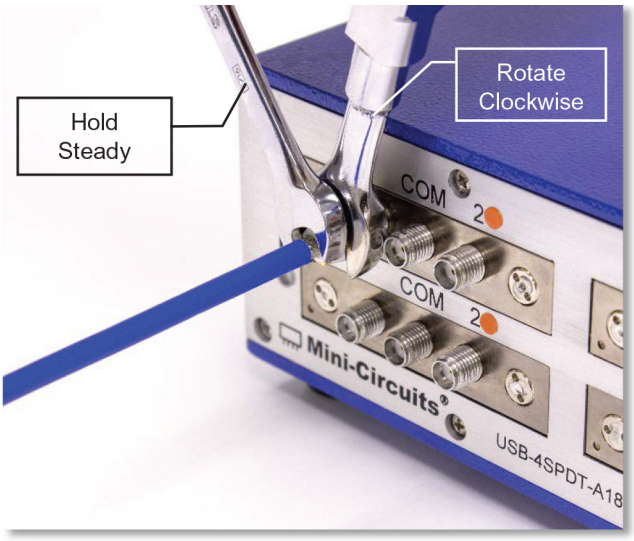

*NOTE: Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torqueing the connector.

NOTES
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Hand-Flex Coaxial Cable 086-6SBSM+

Straight SMA Female Bulkhead to Straight SMA Male

Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-MALE RETURN LOSS (dB)	SMA-FEMALE BULKHEAD RETURN LOSS (dB)
100.0	0.08	39.7	41.4
200.0	0.10	35.7	38.1
300.0	0.12	34.0	37.2
400.0	0.13	34.1	36.6
500.0	0.15	34.9	38.2
600.0	0.16	38.0	40.1
700.0	0.17	43.0	42.7
800.0	0.18	53.9	48.0
900.0	0.19	41.9	48.8
1000.0	0.19	37.5	43.7
1100.0	0.19	36.0	40.6
1200.0	0.21	35.3	38.7
1300.0	0.21	36.4	38.4
1400.0	0.21	38.3	39.4
1500.0	0.22	43.6	41.9
1600.0	0.23	49.8	46.0
1700.0	0.23	42.9	55.5
1800.0	0.23	38.8	49.9
1900.0	0.24	37.0	42.9
2000.0	0.25	35.8	38.7
2400.0	0.26	53.9	38.8
3000.0	0.26	34.1	31.5
4000.0	0.30	41.9	37.3
5000.0	0.34	30.5	28.6
6000.0	0.36	32.3	30.7
7000.0	0.38	38.5	34.9
8000.0	0.41	23.0	23.0
9000.0	0.44	23.6	23.5
10000.0	0.45	29.1	27.7
11000.0	0.50	21.9	21.1
12000.0	0.51	23.5	27.7
13000.0	0.52	42.5	27.7
14000.0	0.56	20.6	22.9
15000.0	0.66	24.8	28.9
16000.0	0.59	30.0	31.0
17000.0	0.61	25.3	28.7
18000.0	0.66	24.0	23.5

Hand-Flex Coaxial Cable 086-6SBSM+


Straight SMA Female Bulkhead to Straight SMA Male

Typical Performance Curves


Insertion Loss

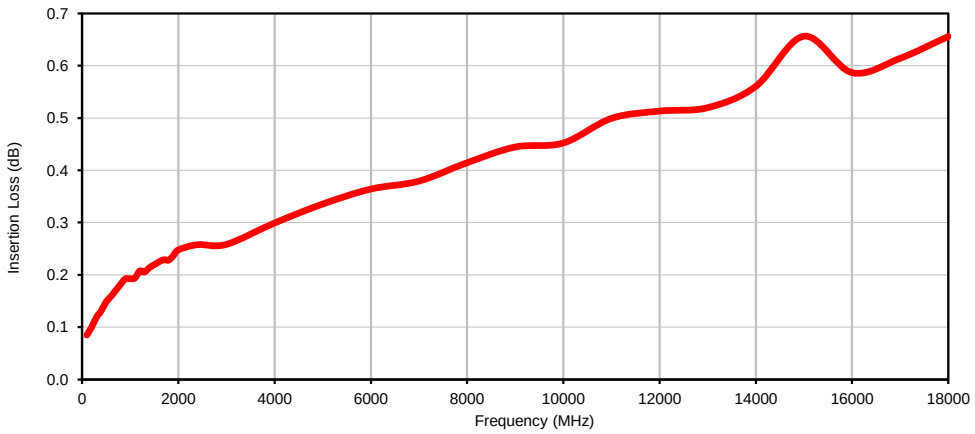

SMA-Male Return Loss

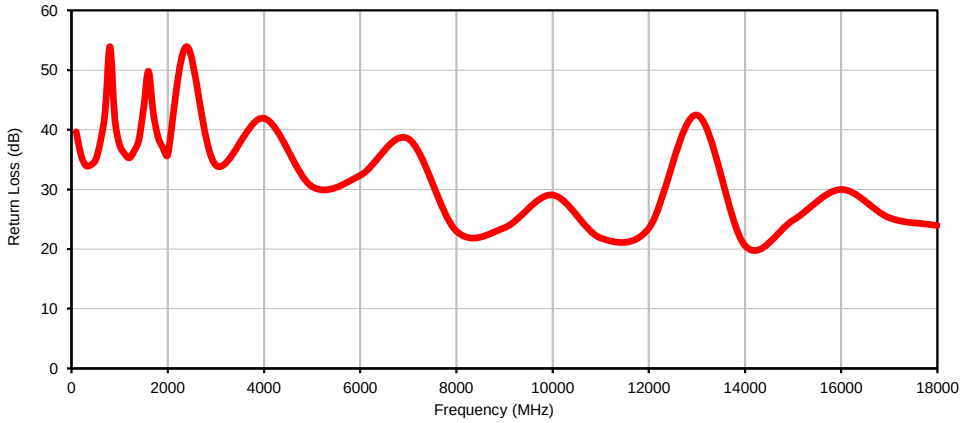


SMA-Female Bulkhead Return Loss

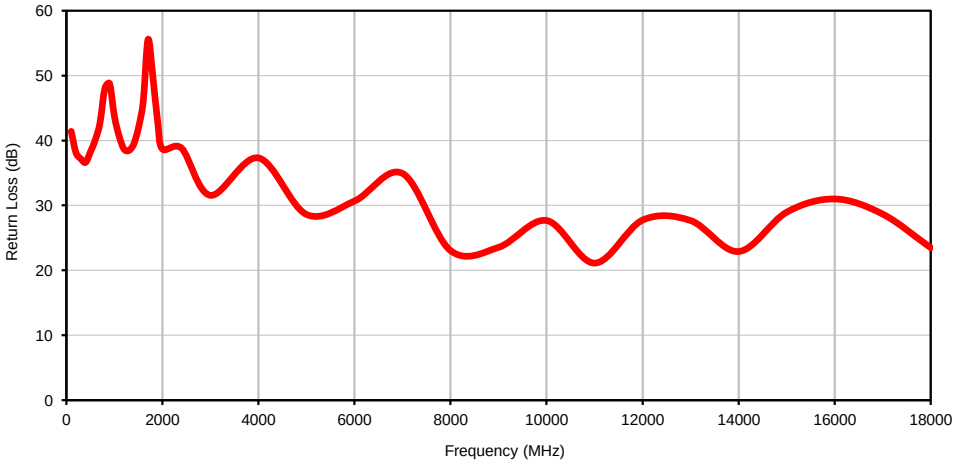

Case Style KP

KP1567

Outline Dimensions

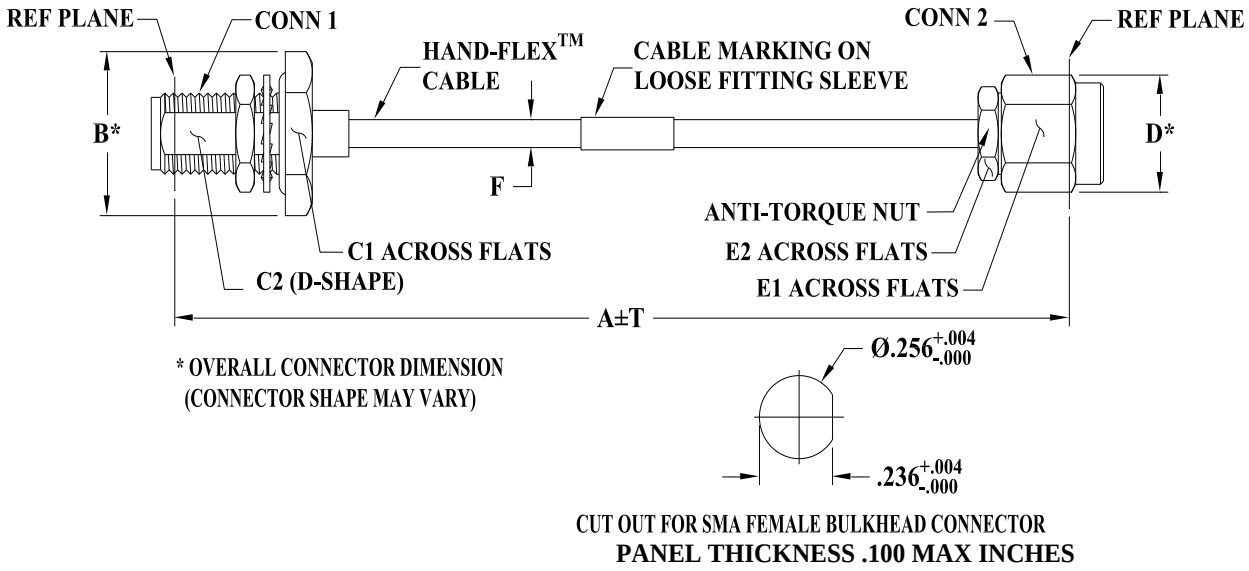

KP1567 SERIES
SMA FEMALE BULKHEAD (CONN-1)
SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		T		WEIGHT GRAMS
	INCH	MM							086U-ASM+	086-ASM+	INCH	MM	
KP1567-3	3.00	76.20	.51 (12.95)	.438 (11.13)	.232 (5.89)	.36 (9.14)	.313 (7.95)	.250 (6.35)	.089∀.002 (2.26∀.06)	.108 NOM (2.75 NOM)	.05	1.27	7.37
KP1567-5	5.00	127.00									.05	1.27	8.29
KP1567-6	6.00	152.40									.05	1.27	8.74
KP1567-7	7.00	177.80									.10	2.54	9.20
KP1567-8	8.00	203.20									.10	2.54	9.66
KP1567-9	9.00	228.60									.10	2.54	10.11
KP1567-10	10.00	254.00									.10	2.54	10.57
KP1567-11	11.00	279.40									.10	2.54	11.03
KP1567-12	12.00	304.80									.10	2.54	11.48
KP1567-13	13.00	330.20									.15	3.81	11.94
KP1567-14	14.00	355.60									.15	3.81	12.40
KP1567-16	16.00	406.40									.15	3.81	13.31

Unless otherwise specified dimensions are in inches (mm).
Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. 086 Hand-Flex™ Coaxial Cable.
2. "A" represents length of cable.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Mini-Circuits

Environmental Specifications **ENV52**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	

This document and its contents are the property of Mini-Circuits.