



Mini-Circuits

**HAND
FLEX™**

Coaxial Cable

086-6SMRSM+

50Ω 6 inch DC to 18 GHz Right-Angle SMA Male to SMA Male

THE BIG DEAL

- Right-Angle connection capable of DC to 18 GHz
- Low Insertion Loss, 0.4 dB Typ. to 18 GHz
- Excellent Return Loss, 30 dB Typ. to 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 6 mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems

*Generic photo used for illustration purposes only*

Model No.	086-6SMRSM+
Case Style	KP1573-6
Connectors	Right Angle SMA-Male to SMA-Male

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication Receivers and Transmitters
- Military and Aerospace Systems
- Environmental and Test Chambers

PRODUCT OVERVIEW

086 SMRSM Series Hand-Flex™ Coaxial Cables are ideal for integrating coaxial components and sub-assemblies in tight spaces and dense system configurations. Single right-angle SMA connection minimizes bend-radius at one connection port and is ideal for layouts with connections between perpendicular aspects. Sturdy, hand-formable cable construction maintains shape after bending with bend-radius as small as 6 mm. 086 SMRSM Series Hand-Flex™ Coaxial Cables have the advantage of wide frequency range, excellent return loss, and high power handling.

KEY FEATURES

Feature	Advantages
Hand-Formable RF Cables	The 086 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 6 mm bend radius, the 086 Series Hand-Flex™ is able to make connections in tight spaces making these cables ideal for dense system integration.
18 GHz Right-Angle Connector	Using a custom right-angle connector, the 086 Series Hand-Flex™ is able to meet system requirements of 90° connections without bending and sacrificing high frequency performance up to 18 GHz.
Excellent Return loss	Supporting excellent return loss to 18 GHz, the 086 Series Hand-Flex™ Cables are ideally suited for inter-connecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
High Power Handling • 211 W at 0.5 GHz • 35 W at 18 GHz	086 Series Hand-Flex™ cables can support medium to high RF power levels and can be used in the transmit path. (Power rating at sea-level).
Built-in Anti-torque nut	Mini-Circuits 086 Series Hand-Flex™ cables include an anti-torque feature to support the straight SMA connector body during installation alleviating risk of stress to the connector/cable interface.
Jacketed and Unjacketed options	Standard 086 Series Hand-Flex™ cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. Un-jacketed versions are available upon request.

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-017366
086-6SMRSM+
MCL NY
260421

PAGE 1 OF 5



Mini-Circuits

HAND
FLEX™

Coaxial Cable

086-6SMRSM+

50Ω 6 inch DC to 18 GHz Right-Angle SMA Male to SMA Male

ELECTRICAL SPECIFICATIONS AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Length ¹		6			inches
Insertion Loss	DC-2	—	0.30	0.4	dB
	2-6	—	0.31	0.7	
	6-10	—	0.43	0.9	
	10-18	—	0.57	1.3	
Return Loss	DC-2	20	35	—	dB
	2-6	18	28	—	
	6-10	16	26	—	
	10-18	16	20	—	

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS²

Parameter	Ratings
Operating Temperature	-55 °C to +105 °C
Storage Temperature	-55 °C to +105 °C
Power Handling at +25 °C, Sea Level	211 W at 0.5 GHz 150 W at 1 GHz 104 W at 2 GHz 59 W at 6 GHz 45 W at 10 GHz 35 W at 18 GHz

2. Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits


**HAND
FLEX™**

Coaxial Cable


086-6SMRSM+

50Ω 6 inch DC to 18 GHz Right-Angle SMA Male to SMA Male

CABLE CONSTRUCTION

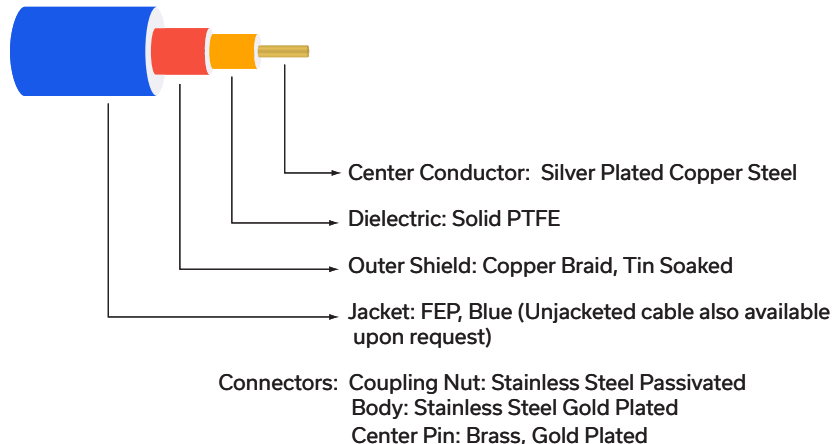

OUTLINE DRAWING

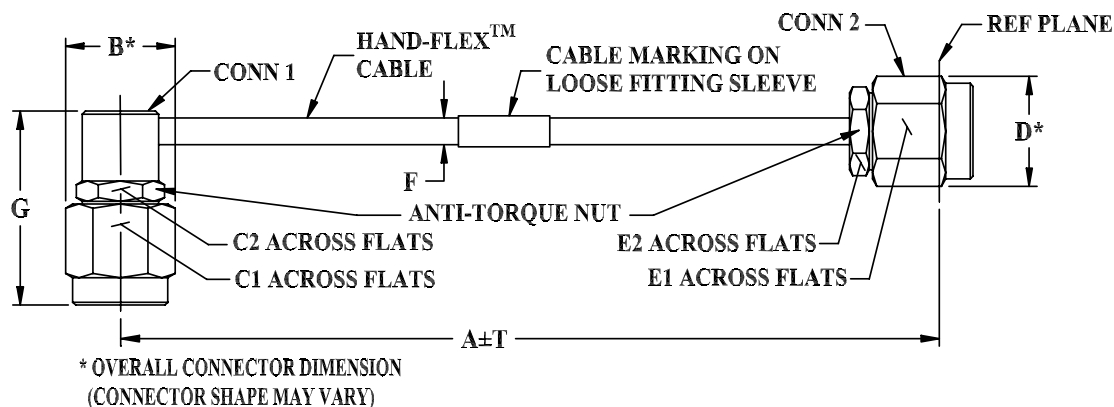

OUTLINE DIMENSIONS (Inch/mm)

A	B	C1	C2	D	E1	E2	F	G	T	wt grams
6.0	.36	.313	.250	.36	.313	.250	.108	.634	0.05	8.74
152.40	9.14	7.95	6.35	9.14	7.95	6.35	2.75	16.10	1.27	





Mini-Circuits

HAND
FLEX™



Coaxial Cable

086-6SMRSM+

50 Ω 6 inch DC to 18 GHz Right-Angle SMA Male to SMA Male

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMA Male	Right-Angle SMA Male
10	0.01	46.7	53.3
1000	0.12	35.4	34.7
1800	0.17	34.9	34.9
2400	0.19	33.3	33.2
4000	0.25	34.2	33.6
5000	0.28	38.6	38.9
6000	0.32	29.5	28.8
7000	0.34	37.4	33.7
8000	0.38	26.1	24.7
9000	0.40	30.9	28.7
10000	0.45	23.3	23.2
12000	0.49	24.9	26.7
14000	0.52	30.4	27.9

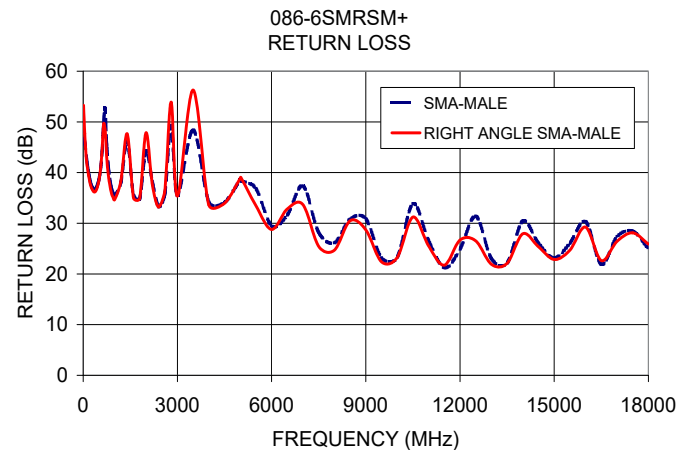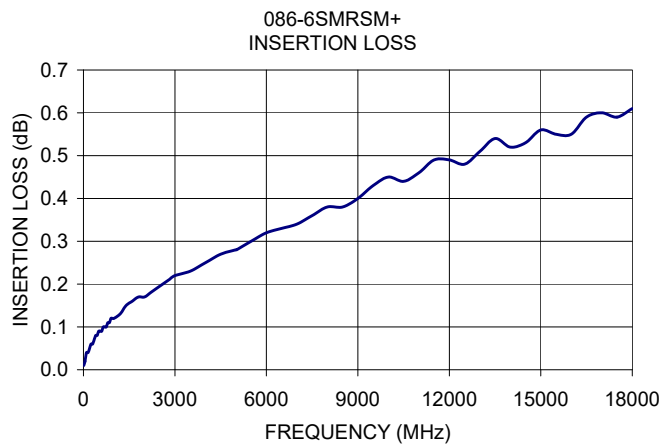



Mini-Circuits

HAND
FLEX™

Coaxial Cable

086-6SMRSM+

50Ω 6 inch DC to 18 GHz Right-Angle SMA Male to SMA Male

PROPER CABLE CONNECTION USING ANTI-TORQUE NUT

Mini-Circuits 086-series HandFlex™ interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.

TO PROPERLY TIGHTEN THE CABLE CONNECTOR:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.



2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.



3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

*NOTE: Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torquing the connector.

NOTES



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html




Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-MALE RETURN LOSS (dB)	RIGHT ANGLE SMA-MALE RETURN LOSS (dB)
10.0	0.01	46.7	53.3
50.0	0.02	46.0	47.7
100.0	0.04	43.3	42.6
150.0	0.04	41.0	40.4
200.0	0.05	39.1	38.5
250.0	0.06	37.6	37.2
300.0	0.06	36.9	36.5
350.0	0.07	36.6	36.2
400.0	0.08	36.8	36.4
450.0	0.08	37.5	37.1
500.0	0.09	38.6	38.4
550.0	0.09	40.5	40.6
600.0	0.09	44.0	44.2
650.0	0.10	49.9	49.7
700.0	0.10	52.6	48.3
750.0	0.10	45.5	42.9
800.0	0.11	41.3	39.5
850.0	0.11	38.7	37.5
900.0	0.12	36.9	35.9
950.0	0.12	35.9	35.1
1000.0	0.12	35.4	34.7
1200.0	0.13	38.0	38.4
1400.0	0.15	46.2	47.7
1600.0	0.16	35.6	35.1
1800.0	0.17	34.9	34.9
2000.0	0.17	44.2	47.9
2200.0	0.18	38.3	37.7
2400.0	0.19	33.3	33.2
2600.0	0.20	35.7	36.6
2800.0	0.21	49.3	53.9
3000.0	0.22	35.5	35.4
3500.0	0.23	48.4	56.3
4000.0	0.25	34.2	33.6
4500.0	0.27	34.1	33.9
5000.0	0.28	38.6	38.9
5020.0	0.28	38.4	39.1
5500.0	0.30	36.9	33.5
6000.0	0.32	29.5	28.8
6500.0	0.33	31.6	32.8
7000.0	0.34	37.4	33.7
7500.0	0.36	28.2	25.5
8000.0	0.38	26.1	24.7
8500.0	0.38	30.8	30.5
9000.0	0.40	30.9	28.7
9500.0	0.43	23.2	22.4
10000.0	0.45	23.3	23.2
10500.0	0.44	33.9	31.2
11000.0	0.46	26.6	25.5
11500.0	0.49	21.2	21.7
12000.0	0.49	24.9	26.7
12500.0	0.48	31.4	26.5
13000.0	0.51	23.0	21.9
13500.0	0.54	22.2	22.1
14000.0	0.52	30.4	27.9
14500.0	0.53	26.1	25.4
15000.0	0.56	23.2	22.9
15500.0	0.55	26.1	24.7
16000.0	0.55	30.3	29.3
16500.0	0.59	21.9	22.6
17000.0	0.60	27.3	26.4
17500.0	0.59	28.5	28.1
18000.0	0.61	25.0	25.9

Typical Performance Curves

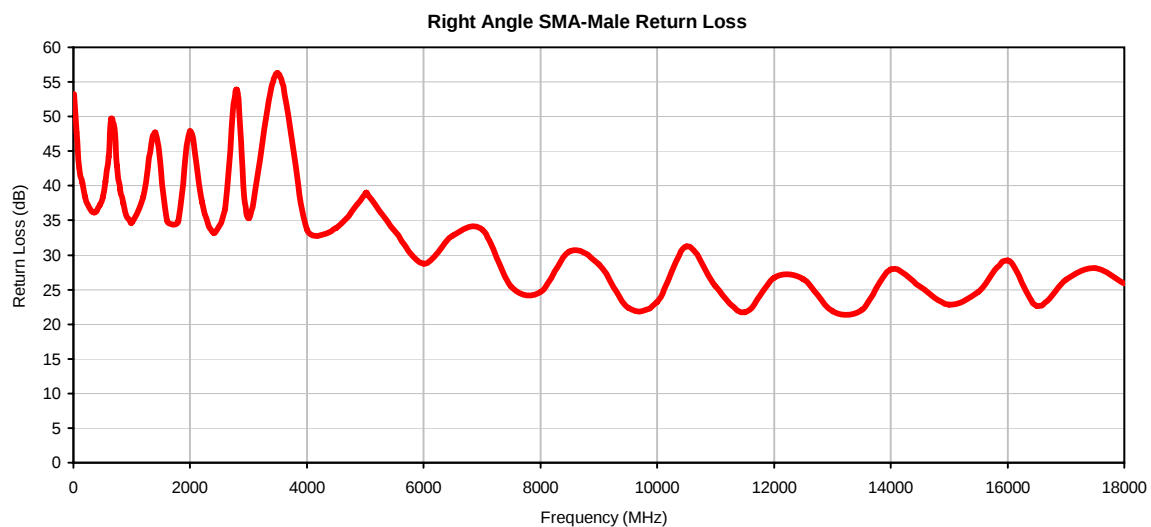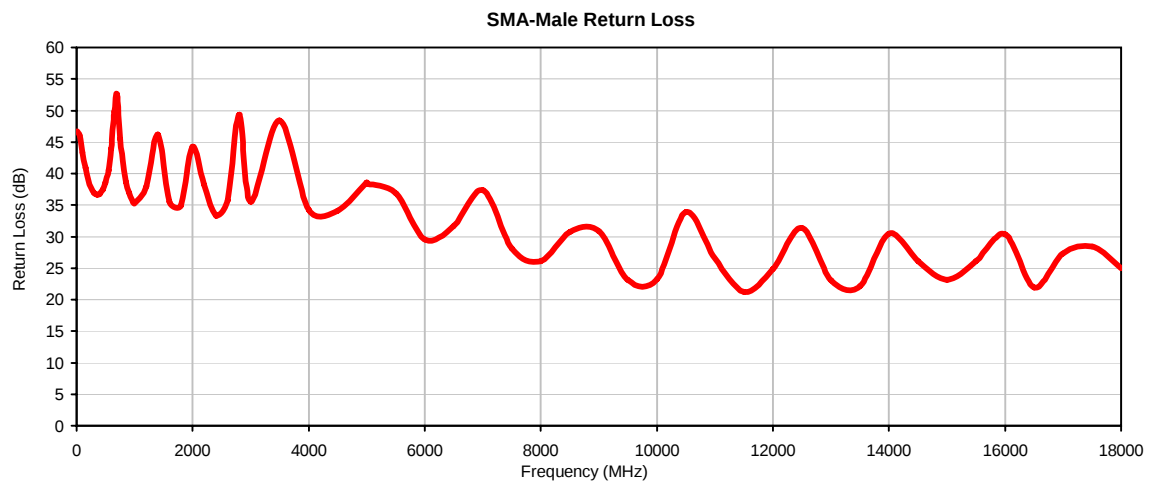

Outline Dimensions

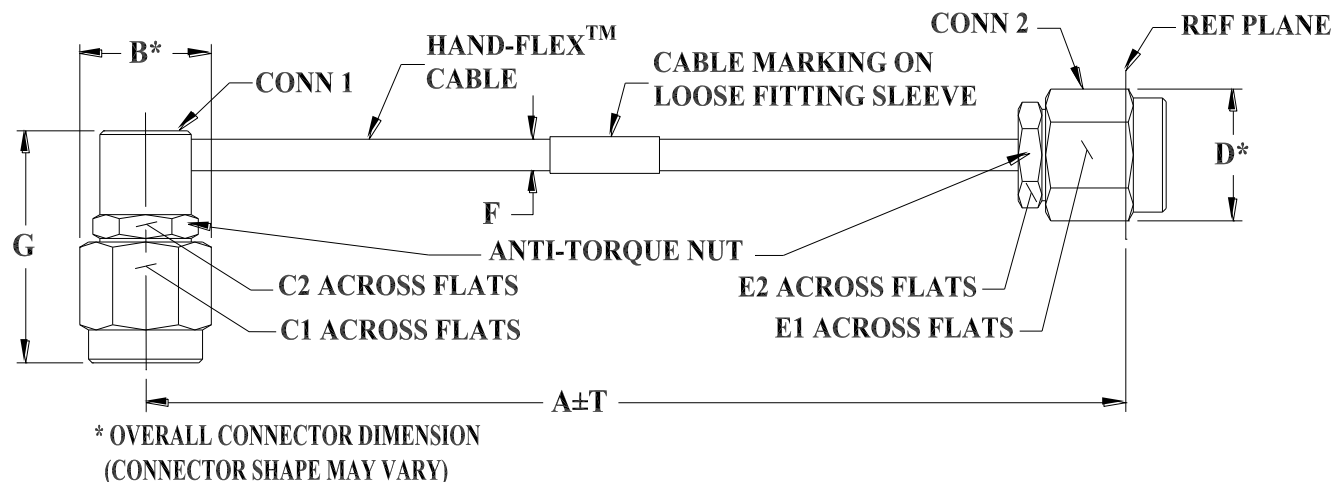

KP1573 SERIES
RIGHT ANGLE SMA MALE (CONN-1)
SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		G	H	T		WEIGHT GRAMS
	INCH	MM							086U- ASMRSM+	086- ASMRSM+			INCH	MM	
KP1573-3	3.00	76.20	.36 (9.14)	.313 (7.95)	.250 (6.35)	.36 (9.14)	.313 (7.95)	.250 (6.35)	.089±.002 (2.26±.05)	.108 NOM (2.74 NOM)	.634 (16.10)	-- --	.05	1.27	7.37
KP1573-4	4.00	101.60											.05	1.27	7.83
KP1573-5	5.00	127.00											.05	1.27	8.27
KP1573-6	6.00	152.40											.05	1.27	8.74
KP1573-7	7.00	177.80											.10	2.54	9.20
KP1573-8	8.00	203.20											.10	2.54	9.66
KP1573-9	9.00	228.60											.10	2.54	10.11
KP1573-10	10.00	254.00											.10	2.54	10.57
KP1573-11	11.00	279.40											.10	2.54	11.03
KP1573-12	12.00	304.80											.10	2.54	11.48
KP1573-14	14.00	355.60											.15	3.81	12.40
KP1573-15	15.00	381.00											.15	3.81	12.86
KP1573-16	16.00	406.40											.15	3.81	13.31
KP1573-18	18.00	457.20											.15	3.81	14.23
KP1573-24	24.00	609.60											.15	3.81	16.97

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

- 086 Hand-Flex™ Coaxial Cable.
- "A" represents length of cable.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	