



Coaxial Cable

141-26SM+

50Ω 26 inch DC to 18 GHz SMA Male

THE BIG DEAL

- Wideband Frequency Coverage, DC to 18 GHz
- Low Insertion Loss, 1.2 dB Typ. at 18 GHz
- Excellent Return Loss, 34 dB Typ. at 18 GHz
- Hand Formable to Almost Any Custom Shape Without Special Bending Tools
- 8 mm Bend Radius for Tight Installations
- Anti-Torque Nut Prevents Cable Stress During Installation
- Insulated Outer Jacket Standard
- Ideal for Interconnect of Assembled Systems

*Generic photo used for illustration purposes only*

| | |
|-------------------|-----------|
| Model No. | 141-26SM+ |
| Case Style | KQ1506-26 |
| Connectors | SMA Male |

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Replacement for Custom Bent 0.141" Semi-Rigid Cables
- Communication Receivers and Transmitters
- Military and Aerospace System
- Environmental and Test Chambers

PRODUCT OVERVIEW

Mini-Circuits' 141 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless steel coupling nut over a gold-plated stainless steel connector body and silver-plated copper-clad steel center pin.

KEY FEATURES

| Features | Advantages |
|--|--|
| Hand-Formable RF Cables | The 141 Series Hand-Flex cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies. |
| Tight Bend Radius | Capable of only 8 mm bend radius, the 141 Hand-Flex Series is able to make connections in tight spaces making these cables ideal for dense system integration. |
| Excellent Return Loss | Supporting excellent return loss to 18 GHz, the 141 Series Hand-Flex cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors. |
| Good Power Handling Capability: <ul style="list-style-type: none"> • 546 W at 0.5 GHz • 90 W at 18 GHz | Mini-Circuits' 141 Cable Series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: Power rating is at sea-level altitudes. |
| Built-In Anti-Torque Nut | Mini-Circuits' 141 Series Hand-Flex cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface. |
| Jacketed and Unjacketed Options | Standard 141 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. Unjacketed versions are available upon request. |



Coaxial Cable

141-26SM+

50Ω 26 inch DC to 18 GHz SMA Male

ELECTRICAL SPECIFICATIONS AT +25 °C

| Parameter | Condition (GHz) | Min. | Typ. | Max. | Units |
|---------------------|-----------------|------|------|------|--------|
| Frequency Range | | DC | | 18 | GHz |
| Length ¹ | | | 26 | | inches |
| Insertion Loss | DC-2 | - | 0.2 | 0.6 | dB |
| | 2-6 | - | 0.6 | 1.0 | |
| | 6-10 | - | 0.8 | 1.4 | |
| | 10-18 | - | 1.2 | 2.0 | |
| Return Loss | DC-2 | 22 | 38 | - | dB |
| | 2-6 | 22 | 39 | - | |
| | 6-10 | 17 | 38 | - | |
| | 10-18 | 17 | 34 | - | |

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS²

| Parameter | Ratings |
|-------------------------------------|---|
| Operating Temperature | -55 °C to +105 °C |
| Storage Temperature | -55 °C to +105 °C |
| Power Handling at +25 °C, Sea Level | 546 W at 0.5 GHz 387 W at 1 GHz 273 W at 2 GHz 156 W at 6 GHz 121 W at 10 GHz 90 W at 18 GHz |

2. Permanent damage may occur if any of these limits are exceeded.



HAND FLEX™

Coaxial Cable

141-26SM+

Mini-Circuits

50Ω 26 inch DC to 18 GHz SMA Male


CABLE CONSTRUCTION



- Center Conductor: Silver Plated Copper Clad Steel
- Dielectric: Solid PTFE
- Outer Shield: Copper Braid, Tin Soaked
- Jacket: FEP, Blue (Unjacketed cable also available upon request)

- Connectors:
- Coupling Nut: Stainless Steel Passivated
 - Body: Stainless Steel Gold Plated
 - Center Pin: Silver Plated Copper Clad Steel

OUTLINE DRAWING

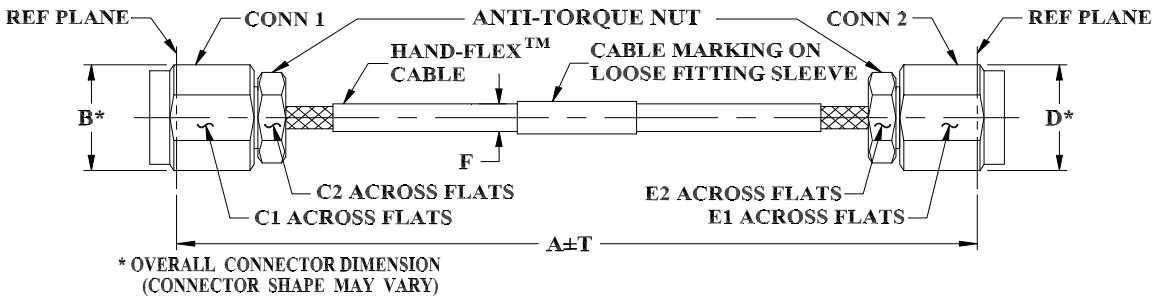

OUTLINE DIMENSIONS (Inch/mm)

| A | B | C1 | C2 | D | E1 | E2 | F | T | wt grams |
|--------|------|-------|-------|------|------|------|-----------|------|-------------|
| 26.0 | 0.36 | 0.315 | 0.250 | 0.36 | 0.31 | 0.25 | .163±.004 | .20 | 34.32 |
| 660.40 | 9.14 | 8.00 | 6.35 | 9.14 | 8.00 | 6.35 | 4.14±0.10 | 5.08 | |

Mini-Circuits



HAND FLEX™

Coaxial Cable



141-26SM+

Mini-Circuits

50Ω 26 inch DC to 18 GHz SMA Male

TYPICAL PERFORMANCE DATA AND CHARTS

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) | |
|-----------------|---------------------|------------------|----------|
| | | SMA Male | SMA Male |
| 10 | 0.06 | 47.1 | 46.0 |
| 1000 | 0.26 | 42.3 | 43.7 |
| 2000 | 0.39 | 35.5 | 35.8 |
| 2500 | 0.44 | 32.4 | 32.9 |
| 4000 | 0.57 | 31.7 | 32.0 |
| 5000 | 0.65 | 32.1 | 33.6 |
| 6000 | 0.72 | 34.5 | 35.0 |
| 7000 | 0.79 | 39.6 | 36.7 |
| 8000 | 0.85 | 57.6 | 43.7 |
| 9000 | 0.91 | 43.0 | 40.4 |
| 10000 | 0.97 | 32.6 | 33.6 |
| 12000 | 1.10 | 26.6 | 26.7 |
| 13000 | 1.14 | 31.8 | 32.9 |
| 15000 | 1.24 | 32.1 | 30.5 |
| 18000 | 1.40 | 31.8 | 34.8 |

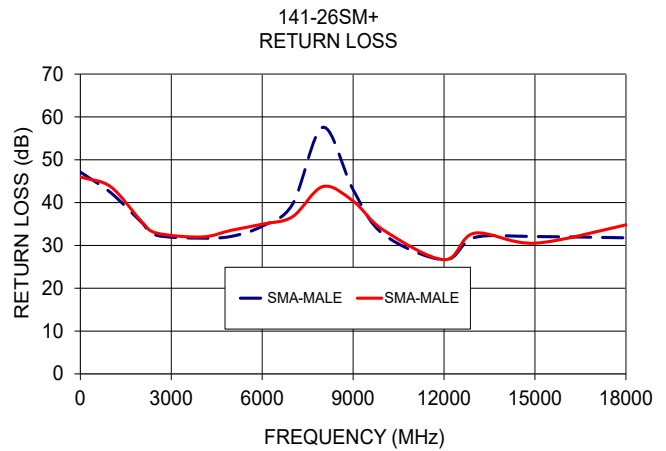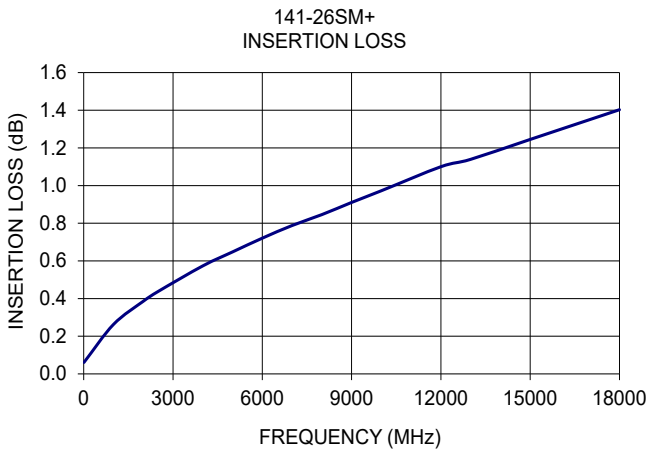



HAND
FLEX™

Coaxial Cable

141-26SM+

Mini-Circuits


50Ω 26 inch DC to 18 GHz SMA Male

PROPER CABLE CONNECTION USING ANTI-TORQUE NUT


Mini-Circuits' 141 Series Hand-Flex interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.

TO PROPERLY TIGHTEN THE CABLE CONNECTOR:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

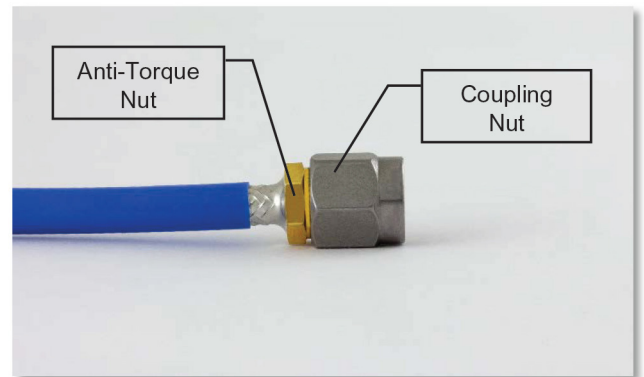

2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

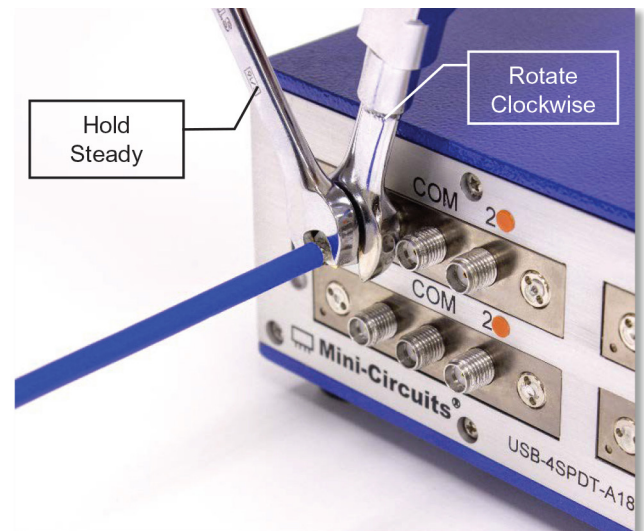

3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

*NOTE: Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torquing the connector.

NOTES



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mini-Circuits


Typical Performance Data

| FREQUENCY (MHz) | INSERTION LOSS (dB) | SMA-MALE 1 RETURN LOSS (dB) | SMA-MALE 2 RETURN LOSS (dB) |
|--------------------|---------------------------|-----------------------------------|-----------------------------------|
| 10 | 0.06 | 47.1 | 46.0 |
| 50 | 0.05 | 33.8 | 33.7 |
| 100 | 0.07 | 33.4 | 33.5 |
| 200 | 0.11 | 37.3 | 36.6 |
| 300 | 0.14 | 39.7 | 39.9 |
| 400 | 0.16 | 32.8 | 32.9 |
| 500 | 0.18 | 51.6 | 48.8 |
| 500 | 0.18 | 51.6 | 48.8 |
| 1000 | 0.26 | 42.3 | 43.7 |
| 1500 | 0.33 | 36.0 | 36.5 |
| 2000 | 0.39 | 35.5 | 35.8 |
| 2500 | 0.44 | 32.4 | 32.9 |
| 3000 | 0.48 | 34.9 | 34.8 |
| 3500 | 0.53 | 31.4 | 31.4 |
| 4000 | 0.57 | 31.7 | 32.0 |
| 4500 | 0.61 | 32.2 | 32.7 |
| 5000 | 0.65 | 32.1 | 33.6 |
| 5500 | 0.69 | 31.8 | 31.7 |
| 6000 | 0.72 | 34.5 | 35.0 |
| 6500 | 0.75 | 38.6 | 40.9 |
| 7000 | 0.79 | 39.6 | 36.7 |
| 7500 | 0.82 | 46.3 | 49.2 |
| 8000 | 0.85 | 57.6 | 43.7 |
| 8500 | 0.88 | 44.0 | 40.5 |
| 9000 | 0.91 | 43.0 | 40.4 |
| 9500 | 0.94 | 36.8 | 36.6 |
| 10000 | 0.97 | 32.6 | 33.6 |
| 10500 | 1.00 | 32.4 | 32.9 |
| 11000 | 1.03 | 29.7 | 29.5 |
| 11500 | 1.08 | 23.6 | 23.5 |
| 12000 | 1.10 | 26.6 | 26.7 |
| 12500 | 1.12 | 28.9 | 29.9 |
| 13000 | 1.14 | 31.8 | 32.9 |
| 13500 | 1.17 | 30.9 | 31.4 |
| 14000 | 1.19 | 38.2 | 34.5 |
| 14500 | 1.22 | 43.1 | 41.4 |
| 15000 | 1.24 | 32.1 | 30.5 |
| 15500 | 1.28 | 32.0 | 29.5 |
| 16000 | 1.30 | 39.4 | 37.9 |
| 16500 | 1.32 | 33.8 | 32.7 |
| 17000 | 1.35 | 33.9 | 33.5 |
| 17500 | 1.38 | 28.6 | 28.4 |
| 18000 | 1.40 | 31.8 | 34.8 |

Typical Performance Curves

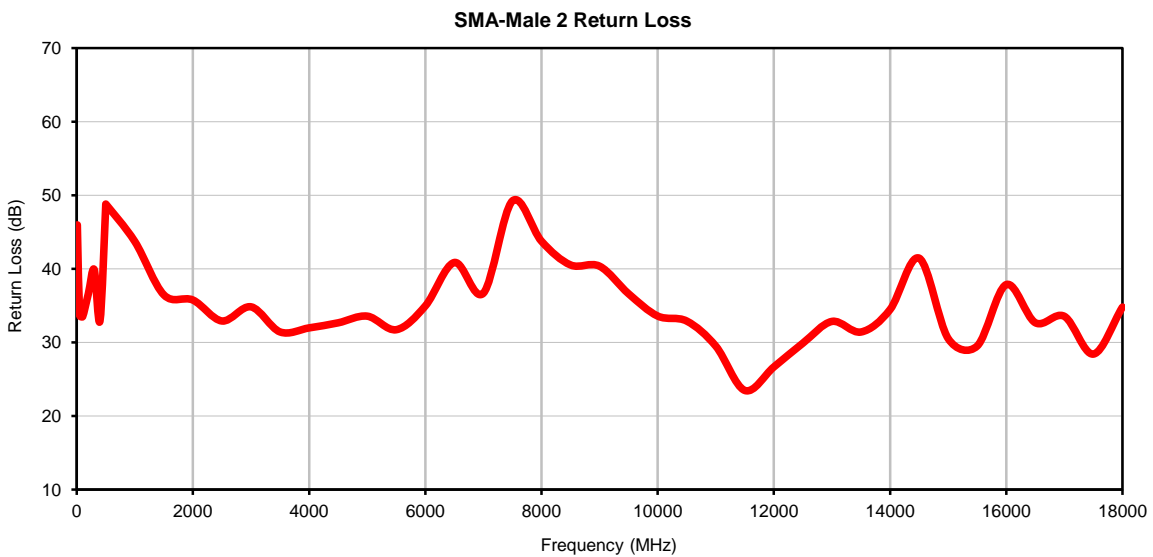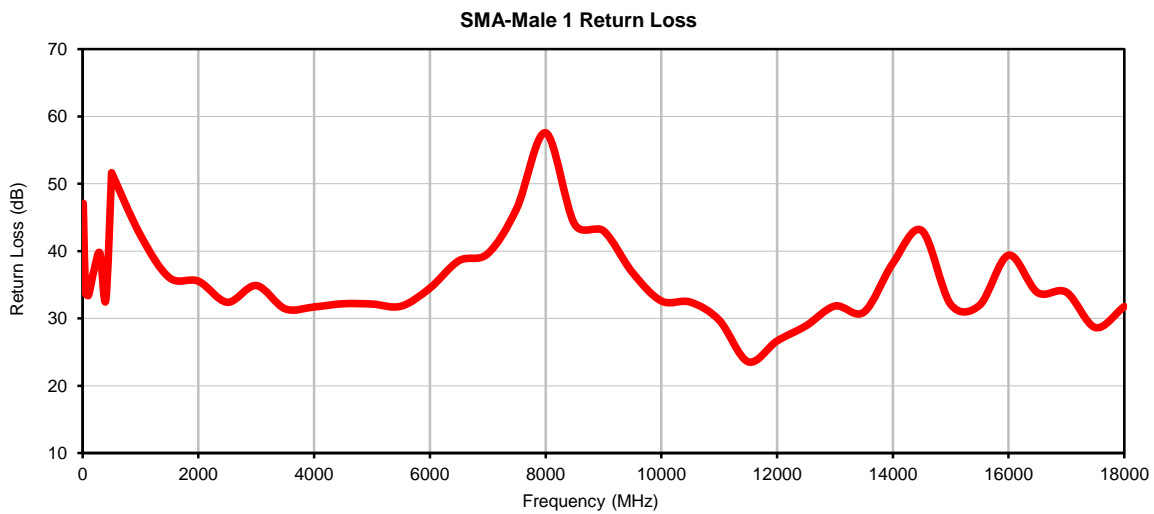

Outline Dimensions

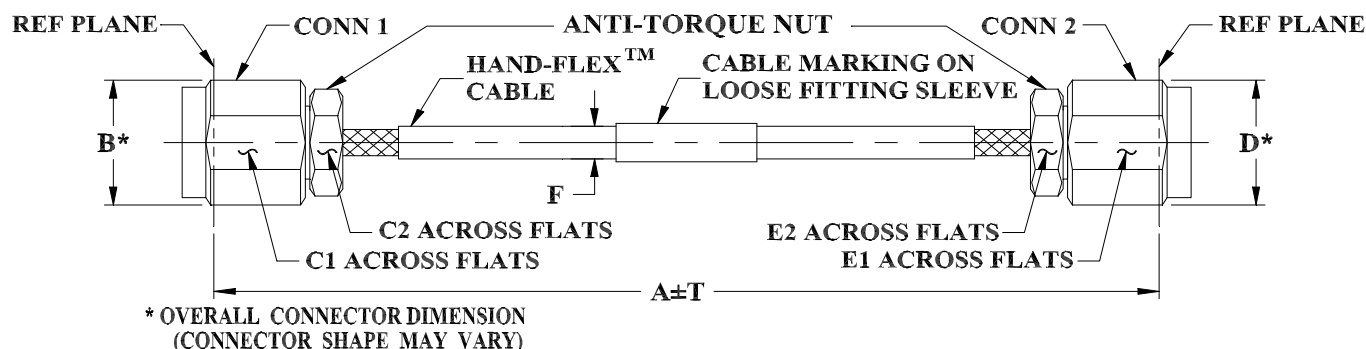

KQ1506 SERIES
SMA MALE (CONN-1)
SMA MALE (CONN-2)

| CASE STYLE # | A | | B | C1 | C2 | D | E1 | E2 | F | | T | | WEIGHT GRAMS |
|--------------|-------|--------|--------|--------|--------|--------|--------|--------|-------------|-------------|------|------|--------------|
| | INCH | MM | | | | | | | 141U-ASM+ | 141-ASM+ | INCH | MM | |
| KQ1506-2 | 2.00 | 50.80 | | | | | | | | | .05 | 1.27 | 6.89 |
| KQ1506-3 | 3.00 | 76.20 | | | | | | | | | .05 | 1.27 | 8.03 |
| KQ1506-4 | 4.00 | 101.60 | | | | | | | | | .05 | 1.27 | 9.17 |
| KQ1506-5 | 5.00 | 127.00 | | | | | | | | | .05 | 1.27 | 10.32 |
| KQ1506-6 | 6.00 | 152.40 | | | | | | | | | .05 | 1.27 | 11.46 |
| KQ1506-7 | 7.00 | 177.80 | | | | | | | | | .10 | 2.54 | 12.60 |
| KQ1506-8 | 8.00 | 203.20 | | | | | | | | | .10 | 2.54 | 13.74 |
| KQ1506-9 | 9.00 | 228.60 | | | | | | | | | .10 | 2.54 | 14.89 |
| KQ1506-10 | 10.00 | 254.00 | | | | | | | | | .10 | 2.54 | 16.03 |
| KQ1506-11 | 11.00 | 279.40 | | | | | | | | | .10 | 2.54 | 17.17 |
| KQ1506-12 | 12.00 | 304.80 | .36 | .315 | .250 | .36 | .315 | .250 | .141±.003 | .163±.004 | .10 | 2.54 | 18.32 |
| KQ1506-13 | 13.00 | 330.20 | (9.14) | (8.00) | (6.35) | (9.14) | (8.00) | (6.35) | (3.58±0.07) | (4.14±0.10) | .15 | 3.81 | 19.46 |
| KQ1506-14 | 14.00 | 355.60 | | | | | | | | | .15 | 3.81 | 20.60 |
| KQ1506-15 | 15.00 | 381.00 | | | | | | | | | .15 | 3.81 | 21.75 |
| KQ1506-16 | 16.00 | 406.40 | | | | | | | | | .15 | 3.81 | 22.89 |
| KQ1506-17 | 17.00 | 431.80 | | | | | | | | | .15 | 3.81 | 24.03 |
| KQ1506-18 | 18.00 | 457.20 | | | | | | | | | .15 | 3.81 | 25.17 |
| KQ1506-19 | 19.00 | 482.60 | | | | | | | | | .15 | 3.81 | 26.32 |
| KQ1506-19.7 | 19.69 | 500.00 | | | | | | | | | .15 | 3.81 | 27.12 |
| KQ1506-20 | 20.00 | 508.00 | | | | | | | | | .15 | 3.81 | 27.45 |
| KQ1506-22 | 22.00 | 558.80 | | | | | | | | | .15 | 3.81 | 29.75 |
| KQ1506-24 | 24.00 | 609.60 | | | | | | | | | .15 | 3.81 | 32.03 |

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. 141 Hand-Flex™ Coaxial Cable.
2. "A" Represents Length of Cable.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|-----------------------|--|-----------------------------|
| Operating Temperature | -55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment | Individual Model Data sheet |
| Storage Temperature | -55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment | Individual Model Data Sheet |
| Thermal Shock | -55° to 100°C, 100 Cycles | MIL-STD-202F; Method 107G |
| Multiple Bend Radius | 40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables | |
| Single Bend Radius | 8 mm for 141 series cables 6 mm for 086 series cables | |