

Surface Mount Frequency Mixer

ADE-3GL+

Level 7 (LO Power +7 dBm) 2100 to 2600 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	4
RF	6
IF	3
GROUND	1,2,5

Outline Drawing

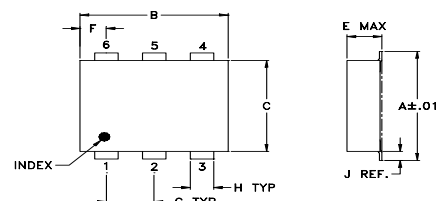

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.082	.055	.100
6.91	7.87	5.59	2.54	2.08	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.15		

Demo Board MCL P/N: TB-02 Suggested PCB Layout (PL-051)

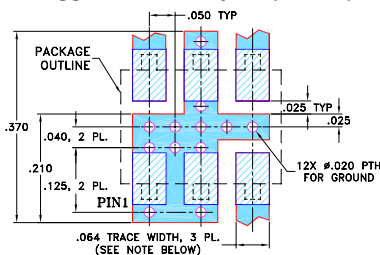

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.0 dB typ.
- good L-R isolation, 34 dB typ.
- low profile package
- aqueous washable
- low cost
- protected by U.S. Patent 6,133,525

Applications

- PCMCIA cards
- ISM



Generic photo used for illustration purposes only
CASE STYLE: CD541

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
2100-2600	DC-600	6.0	0.25	8.8	34	25	20	7	17

1 dB COMP.: +1 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
2015.79	2045.79	5.55	36.00	12.90	2.04	1.52
2121.05	2151.05	5.41	35.10	15.00	1.94	1.48
2226.32	2256.32	5.57	34.30	17.50	2.23	1.40
2300.00	2330.00	5.86	34.50	19.40	2.46	1.39
2320.00	2350.00	5.98	34.50	19.90	2.55	1.39
2331.58	2361.58	5.94	34.50	20.20	2.61	1.39
2350.00	2380.00	5.96	34.60	20.70	2.68	1.39
2380.00	2410.00	5.96	34.40	21.60	2.84	1.39
2400.00	2430.00	6.06	34.30	22.10	2.88	1.40
2430.00	2460.00	6.05	34.10	23.00	3.01	1.40
2436.84	2466.84	6.10	34.00	23.20	3.01	1.40
2450.00	2480.00	6.01	33.90	23.60	3.06	1.41
2480.00	2510.00	6.03	33.80	24.70	3.16	1.41
2500.00	2530.00	6.02	33.80	25.70	3.21	1.44
2530.00	2560.00	6.03	33.50	26.80	3.26	1.46
2542.11	2572.11	6.20	33.60	27.30	3.16	1.48
2550.00	2580.00	6.07	33.60	27.80	3.32	1.50
2580.00	2610.00	6.00	33.50	28.70	3.32	1.51
2600.00	2630.00	6.10	33.40	28.90	3.32	1.51
2630.00	2660.00	6.15	33.20	28.70	3.44	1.56







Electrical Schematic

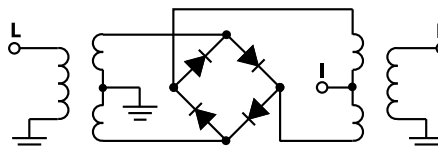

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. H
M151107
ADE-3GL+
WL/TD/CP/AM
200420
Page 1 of 2

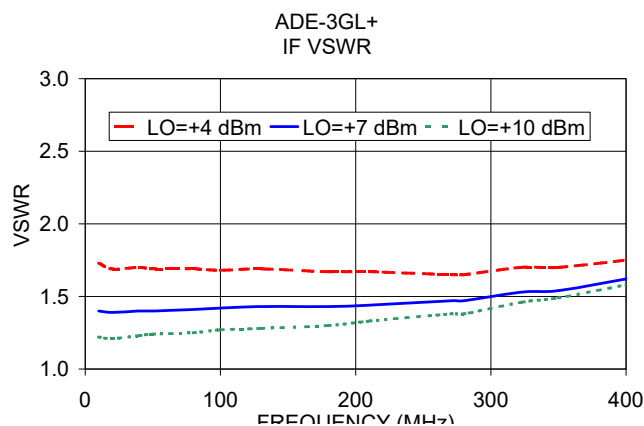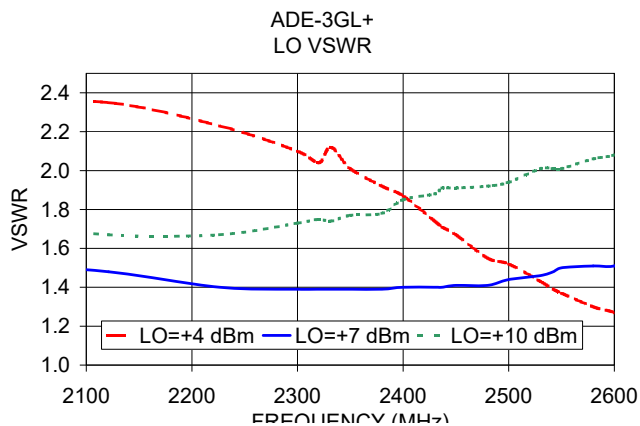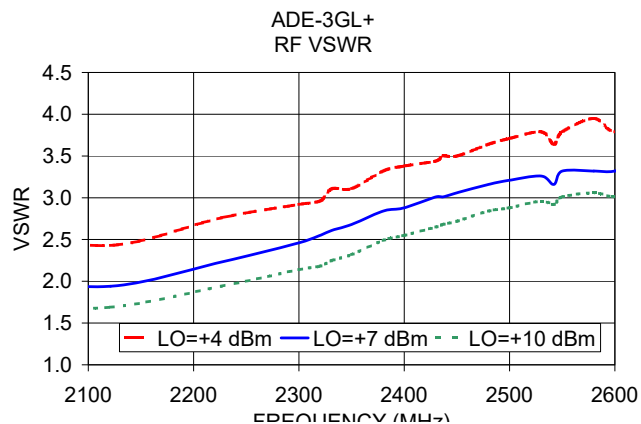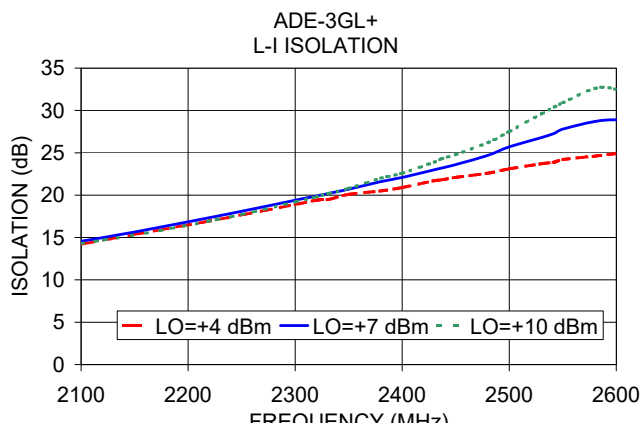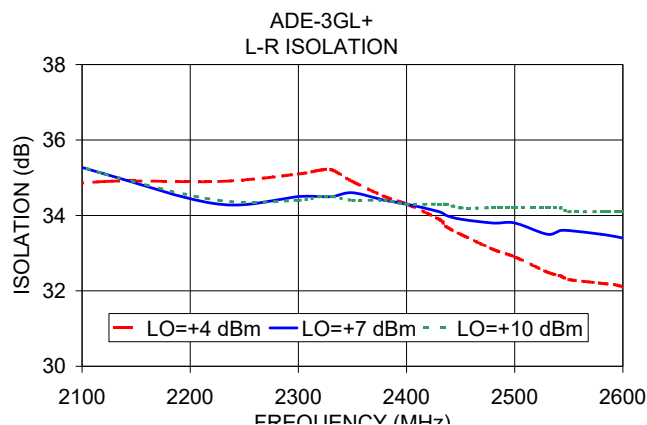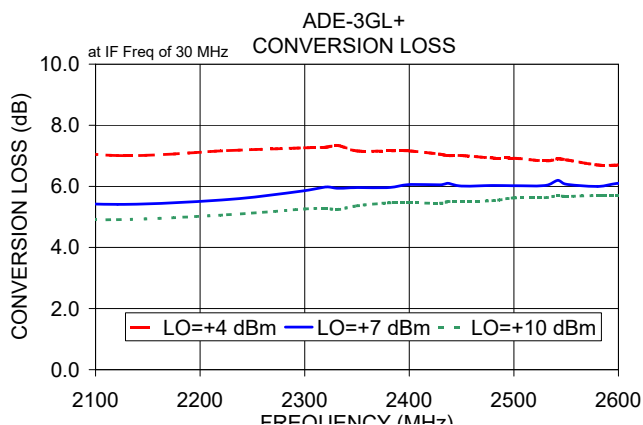

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-3GL+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
1620.0	1650.0	41.18	10.97	6.07
1680.0	1710.0	28.32	7.59	5.56
1740.0	1770.0	17.14	6.75	5.47
1800.0	1830.0	11.51	6.72	5.65
1860.0	1890.0	8.68	6.32	5.46
1920.0	1950.0	8.13	6.51	5.72
1980.0	2010.0	7.63	6.36	5.64
2040.0	2070.0	7.10	6.06	5.45
2100.0	2130.0	7.04	6.20	5.63
2160.0	2190.0	6.89	6.12	5.63
2220.0	2250.0	6.88	6.06	5.57
2280.0	2310.0	7.22	6.30	5.78
2320.0	2350.0	7.18	6.16	5.59
2380.0	2410.0	7.92	6.72	6.03
2420.0	2450.0	7.97	6.75	6.01
2480.0	2510.0	8.49	7.24	6.42
2520.0	2550.0	8.36	7.14	6.40
2580.0	2610.0	8.59	7.42	6.74
2620.0	2650.0	8.48	7.33	6.73
2680.0	2710.0	8.65	7.47	6.88
2720.0	2750.0	8.57	7.46	6.92
2780.0	2810.0	8.63	7.55	7.00
2820.0	2850.0	8.57	7.59	7.08
2880.0	2910.0	8.72	7.68	7.15
2920.0	2950.0	8.77	7.83	7.36
2980.0	3010.0	8.79	7.69	7.24
3020.0	3050.0	8.94	7.88	7.41
3080.0	3110.0	8.93	7.65	7.15
3120.0	3150.0	9.13	7.81	7.33
3180.0	3210.0	9.29	7.67	7.20
3220.0	3250.0	9.69	7.89	7.44
3280.0	3310.0	9.89	7.67	7.22
3320.0	3350.0	10.71	8.01	7.50
3380.0	3410.0	11.14	7.82	7.29
3420.0	3450.0	12.50	8.22	7.55
3480.0	3510.0	13.61	8.11	7.35
3520.0	3550.0	17.08	8.74	7.62
3580.0	3610.0	18.76	8.86	7.49
3620.0	3650.0	23.18	9.85	7.83
3680.0	3710.0	25.09	10.38	7.87

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
1620.0	1650.0	-13.50	4.72	14.52
1680.0	1710.0	-10.37	10.64	13.43
1740.0	1770.0	-4.19	10.23	13.00
1800.0	1830.0	6.53	10.17	19.10
1860.0	1890.0	8.13	12.47	17.39
1920.0	1950.0	12.01	15.17	18.08
1980.0	2010.0	18.77	17.56	20.51
2040.0	2070.0	14.52	17.28	18.63
2100.0	2130.0	12.87	16.83	17.37
2160.0	2190.0	12.13	15.32	16.27
2220.0	2250.0	11.79	14.54	15.53
2280.0	2310.0	12.17	14.38	16.37
2320.0	2350.0	11.65	14.40	17.69
2380.0	2410.0	13.49	16.50	21.75
2420.0	2450.0	13.50	16.51	19.68
2480.0	2510.0	14.62	16.62	19.22
2520.0	2550.0	13.21	16.74	17.58
2580.0	2610.0	13.49	16.96	17.91
2620.0	2650.0	12.79	16.83	18.17
2680.0	2710.0	12.48	16.67	19.28
2720.0	2750.0	13.47	16.36	18.16
2780.0	2810.0	12.67	16.44	19.11
2820.0	2850.0	13.05	16.29	17.66
2880.0	2910.0	12.17	16.20	16.89
2920.0	2950.0	13.50	16.60	16.77
2980.0	3010.0	11.41	15.59	15.76
3020.0	3050.0	12.37	16.06	16.46
3080.0	3110.0	10.31	15.48	18.79
3120.0	3150.0	10.45	15.19	25.85
3180.0	3210.0	8.98	16.47	20.22
3220.0	3250.0	9.10	16.50	21.78
3280.0	3310.0	7.87	16.06	20.59
3320.0	3350.0	7.68	15.60	21.68
3380.0	3410.0	7.59	15.00	20.39
3420.0	3450.0	8.38	14.11	20.55
3480.0	3510.0	9.62	13.06	20.73
3520.0	3550.0	5.32	12.23	18.58
3580.0	3610.0	2.16	11.67	17.85
3620.0	3650.0	-1.45	11.21	16.43
3680.0	3710.0	-2.65	11.06	16.23

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
1620.0	1650.0	-27.10	-1.37	0.35
1680.0	1710.0	-15.99	0.54	0.35
1740.0	1770.0	-6.06	0.84	0.33
1800.0	1830.0	-0.94	0.59	0.20
1860.0	1890.0	0.78	0.33	0.17
1920.0	1950.0	0.76	0.09	0.03
1980.0	2010.0	0.73	0.07	-0.01
2040.0	2070.0	0.86	0.14	0.06
2100.0	2130.0	0.84	0.10	0.00
2160.0	2190.0	0.96	0.19	0.05
2220.0	2250.0	0.99	0.18	0.06
2280.0	2310.0	0.86	0.12	0.05
2320.0	2350.0	0.97	0.20	0.12
2380.0	2410.0	0.75	0.11	0.07
2420.0	2450.0	0.73	0.14	0.09
2480.0	2510.0	0.65	0.07	0.03
2520.0	2550.0	0.71	0.02	0.03
2580.0	2610.0	0.73	-0.04	-0.04
2620.0	2650.0	0.79	0.01	-0.03
2680.0	2710.0	0.76	0.00	-0.04
2720.0	2750.0	0.75	-0.01	-0.01
2780.0	2810.0	0.75	-0.01	-0.01
2820.0	2850.0	0.67	-0.01	0.00
2880.0	2910.0	0.79	0.00	-0.01
2920.0	2950.0	0.66	-0.01	0.01
2980.0	3010.0	0.79	0.01	0.01
3020.0	3050.0	0.67	0.02	0.04
3080.0	3110.0	0.84	0.09	0.10
3120.0	3150.0	0.83	0.09	0.09
3180.0	3210.0	0.94	0.15	0.09
3220.0	3250.0	0.97	0.13	0.08
3280.0	3310.0	0.96	0.19	0.09
3320.0	3350.0	0.80	0.18	0.07
3380.0	3410.0	0.61	0.24	0.08
3420.0	3450.0	0.22	0.29	0.08
3480.0	3510.0	-0.47	0.36	0.08
3520.0	3550.0	-2.13	0.47	0.08
3580.0	3610.0	-3.31	0.53	0.07
3620.0	3650.0	-5.83	0.53	0.09
3680.0	3710.0	-6.99	0.51	0.10

Frequency Mixer

ADE-3GL+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2339.89MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2089.89MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2610.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
160.1	2500.0	7.6	10.1	2100.0	6.27	910.1	1700.0	10.68
180.1	2520.0	7.7	30.1	2120.0	6.30	890.1	1720.0	10.35
200.1	2540.0	7.7	50.1	2140.0	6.27	870.1	1740.0	10.08
220.1	2560.0	7.7	70.1	2160.0	6.27	850.1	1760.0	9.74
240.1	2580.0	7.8	90.1	2180.0	6.14	830.1	1780.0	9.51
260.1	2600.0	7.7	110.1	2200.0	6.16	810.1	1800.0	9.28
280.1	2620.0	7.9	130.1	2220.0	6.22	790.1	1820.0	9.13
300.1	2640.0	7.8	150.1	2240.0	6.12	770.1	1840.0	8.96
320.1	2660.0	7.8	170.1	2260.0	6.12	750.1	1860.0	8.78
340.1	2680.0	7.7	190.1	2280.0	5.97	730.1	1880.0	8.58
360.1	2700.0	7.7	210.1	2300.0	6.01	710.1	1900.0	8.46
380.1	2720.0	7.7	230.1	2320.0	5.92	690.1	1920.0	8.27
400.1	2740.0	7.6	250.1	2340.0	5.85	670.1	1940.0	8.19
420.1	2760.0	7.7	270.1	2360.0	5.78	650.1	1960.0	8.01
440.1	2780.0	7.5	290.1	2380.0	5.66	630.1	1980.0	7.89
460.1	2800.0	7.5	310.1	2400.0	5.67	610.1	2000.0	7.76
480.1	2820.0	7.5	330.1	2420.0	5.61	590.1	2020.0	7.66
500.1	2840.0	7.4	350.1	2440.0	5.59	570.1	2040.0	7.55
520.1	2860.0	7.5	390.1	2480.0	5.56	550.1	2060.0	7.47
540.1	2880.0	7.4	410.1	2500.0	5.71	530.1	2080.0	7.38
560.1	2900.0	7.5	450.1	2540.0	5.78	510.1	2100.0	7.40
580.1	2920.0	7.5	470.1	2560.0	5.75	490.1	2120.0	7.40
600.1	2940.0	7.5	510.1	2600.0	5.96	470.1	2140.0	7.43
620.1	2960.0	7.5	530.1	2620.0	6.03	450.1	2160.0	7.48
640.1	2980.0	7.6	570.1	2660.0	6.20	430.1	2180.0	7.60
660.1	3000.0	7.7	590.1	2680.0	6.38	410.1	2200.0	7.70
680.1	3020.0	7.7	630.1	2720.0	6.64	390.1	2220.0	7.73
700.1	3040.0	7.7	650.1	2740.0	6.75	370.1	2240.0	7.86
720.1	3060.0	7.9	690.1	2780.0	7.07	330.1	2280.0	8.01
740.1	3080.0	7.9	710.1	2800.0	7.24	310.1	2300.0	8.01
760.1	3100.0	8.1	750.1	2840.0	7.53	270.1	2340.0	8.05
780.1	3120.0	8.1	770.1	2860.0	7.69	250.1	2360.0	8.02
820.1	3160.0	8.4	810.1	2900.0	7.98	210.1	2400.0	7.87
840.1	3180.0	8.6	830.1	2920.0	8.16	190.1	2420.0	7.85
880.1	3220.0	8.9	870.1	2960.0	8.54	150.1	2460.0	7.66
900.1	3240.0	9.0	890.1	2980.0	8.68	130.1	2480.0	7.63
940.1	3280.0	9.5	930.1	3020.0	9.09	90.1	2520.0	7.46
960.1	3300.0	9.7	950.1	3040.0	9.29	70.1	2540.0	7.39
1000.1	3340.0	10.1	990.1	3080.0	9.72	30.1	2580.0	7.33
1020.1	3360.0	10.6	1010.1	3100.0	9.96	10.1	2600.0	7.35

REV. X3
ADE-3GL+
101013
Page 2 of 5

Frequency Mixer

ADE-3GL+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)					@LO (dBm)		
	+4	+7	+10	+4	+7	+10			+4	+7	+10
1650.0	26.10	26.87	28.52	7.47	7.58	8.56	1620.0	1650.0	20.57	22.48	25.48
1710.0	26.65	27.63	29.19	7.14	7.49	8.54	1680.0	1710.0	21.69	25.12	27.95
1770.0	27.16	28.18	29.71	6.89	7.79	8.70	1740.0	1770.0	24.10	27.69	29.81
1830.0	27.51	28.63	30.00	7.02	8.19	8.90	1800.0	1830.0	26.99	29.93	31.45
1890.0	27.61	29.25	31.00	7.62	8.68	9.22	1860.0	1890.0	31.12	32.53	33.71
1950.0	27.86	30.02	32.16	8.37	9.18	9.50	1920.0	1950.0	33.72	35.33	36.11
2010.0	28.26	30.91	33.49	9.32	9.83	9.91	1980.0	2010.0	36.95	38.13	39.78
2070.0	28.83	31.89	34.96	10.39	10.38	10.17	2040.0	2070.0	37.62	39.77	42.45
2130.0	29.28	32.64	36.09	11.40	11.09	10.64	2100.0	2130.0	39.99	41.82	41.09
2190.0	29.68	33.41	37.38	12.56	11.74	11.02	2160.0	2190.0	41.20	40.90	42.95
2250.0	29.47	33.44	37.72	13.56	12.30	11.56	2220.0	2250.0	40.48	39.74	41.35
2310.0	29.40	33.22	37.49	14.45	12.93	11.91	2280.0	2310.0	39.74	41.42	41.95
2350.0	29.13	32.88	37.02	15.08	13.35	12.28	2320.0	2350.0	38.94	39.41	41.23
2410.0	28.91	32.30	35.98	15.74	14.00	12.76	2380.0	2410.0	37.93	39.56	39.92
2450.0	28.73	32.10	35.60	15.90	14.34	13.17	2420.0	2450.0	37.15	37.78	38.05
2510.0	28.53	31.74	34.91	16.10	14.59	13.76	2480.0	2510.0	36.40	36.10	35.98
2550.0	28.57	31.76	34.74	16.20	14.83	14.01	2520.0	2550.0	36.70	36.31	35.87
2610.0	28.65	31.74	34.49	16.46	15.36	14.52	2580.0	2610.0	36.99	36.94	35.68
2650.0	28.70	31.76	34.36	16.56	15.67	14.95	2620.0	2650.0	37.76	36.36	35.63
2710.0	28.71	31.68	34.16	16.92	16.31	15.57	2680.0	2710.0	38.64	37.29	36.40
2750.0	28.87	31.69	33.90	17.16	16.78	16.16	2720.0	2750.0	40.67	38.34	36.64
2810.0	29.04	31.80	33.82	17.63	17.64	17.21	2780.0	2810.0	41.04	40.77	38.57
2850.0	29.30	31.79	33.40	18.06	18.28	18.10	2820.0	2850.0	41.87	39.69	38.95
2910.0	29.52	31.75	32.83	19.00	19.45	19.53	2880.0	2910.0	43.88	42.81	43.12
2950.0	29.81	31.55	32.10	19.85	20.50	20.70	2920.0	2950.0	46.86	45.04	41.41
3010.0	30.12	31.04	31.30	21.50	22.15	22.88	2980.0	3010.0	49.46	45.11	43.89
3050.0	30.29	30.62	30.37	22.98	23.76	24.52	3020.0	3050.0	50.47	45.55	45.68
3110.0	30.68	30.10	29.51	26.03	26.72	27.63	3080.0	3110.0	53.97	50.45	48.56
3150.0	30.76	29.65	28.73	29.13	29.74	30.39	3120.0	3150.0	53.50	52.10	50.22
3210.0	30.94	29.12	28.08	38.26	38.13	35.64	3180.0	3210.0	55.85	56.97	56.76
3250.0	30.76	28.79	27.31	40.90	42.91	34.85	3220.0	3250.0	52.42	57.03	60.39
3310.0	30.65	28.38	26.78	29.58	31.42	29.71	3280.0	3310.0	49.04	54.78	63.02
3350.0	30.24	27.97	26.35	25.91	27.59	27.06	3320.0	3350.0	46.85	52.21	62.46
3410.0	29.58	27.51	26.10	22.28	23.80	23.93	3380.0	3410.0	44.68	49.93	68.77
3450.0	28.96	27.17	25.82	20.42	21.88	22.47	3420.0	3450.0	43.17	48.64	53.84
3510.0	27.83	26.51	25.21	18.36	19.69	20.43	3480.0	3510.0	41.23	47.82	54.65
3550.0	27.35	26.11	24.97	17.27	18.39	19.31	3520.0	3550.0	40.12	47.27	50.27
3610.0	26.25	25.22	24.23	16.02	17.00	17.92	3580.0	3610.0	39.56	43.39	52.16
3650.0	25.75	24.73	23.98	15.41	16.14	17.19	3620.0	3650.0	38.44	42.43	46.87
3710.0	25.04	24.23	23.58	14.72	15.34	16.30	3680.0	3710.0	36.78	40.02	46.49

Frequency Mixer

ADE-3GL+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2600MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
1620.0	1650.0	13.49	5.23	2.79	1650.0	4.60	4.25	3.24	10.0	2.32	1.78	1.46
1680.0	1710.0	10.43	3.46	2.30	1710.0	4.09	3.34	2.98	30.0	2.26	1.76	1.46
1740.0	1770.0	6.68	2.84	2.10	1770.0	3.39	2.70	2.81	50.0	2.27	1.77	1.47
1800.0	1830.0	4.41	2.67	2.17	1830.0	2.77	2.38	2.82	70.0	2.25	1.75	1.47
1860.0	1890.0	3.19	2.44	2.10	1890.0	2.10	2.19	2.78	90.0	2.23	1.73	1.45
1920.0	1950.0	2.84	2.35	2.06	1950.0	1.69	2.11	2.82	110.0	2.21	1.72	1.45
1980.0	2010.0	2.57	2.20	1.96	2010.0	1.52	2.12	2.88	130.0	2.24	1.76	1.48
2040.0	2070.0	2.30	2.02	1.83	2070.0	1.49	2.14	2.88	150.0	2.24	1.75	1.48
2100.0	2130.0	2.21	1.98	1.82	2130.0	1.65	2.22	2.92	170.0	2.22	1.73	1.47
2160.0	2190.0	2.20	1.99	1.85	2190.0	1.87	2.31	2.92	190.0	2.18	1.69	1.45
2220.0	2250.0	2.21	1.98	1.84	2250.0	2.15	2.38	2.88	210.0	2.17	1.70	1.47
2280.0	2310.0	2.35	2.08	1.92	2310.0	2.44	2.45	2.82	230.0	2.15	1.70	1.47
2320.0	2350.0	2.37	2.07	1.90	2350.0	2.67	2.48	2.75	250.0	2.14	1.67	1.45
2380.0	2410.0	2.64	2.28	2.06	2410.0	3.04	2.60	2.74	270.0	2.08	1.64	1.43
2420.0	2450.0	2.82	2.45	2.22	2450.0	3.33	2.67	2.71	290.0	2.06	1.63	1.43
2480.0	2510.0	3.30	2.91	2.65	2510.0	3.78	2.86	2.77	310.0	2.03	1.62	1.44
2520.0	2550.0	3.46	3.09	2.86	2550.0	3.93	2.86	2.72	330.0	2.00	1.58	1.42
2580.0	2610.0	3.78	3.41	3.18	2610.0	4.14	2.87	2.66	350.0	1.94	1.55	1.41
2620.0	2650.0	3.86	3.50	3.30	2650.0	4.11	2.77	2.55	390.0	1.85	1.51	1.41
2680.0	2710.0	4.08	3.69	3.47	2710.0	4.20	2.71	2.42	410.0	1.81	1.48	1.39
2720.0	2750.0	4.11	3.73	3.54	2750.0	4.00	2.57	2.31	450.0	1.72	1.45	1.41
2780.0	2810.0	4.33	3.93	3.73	2810.0	4.03	2.49	2.21	470.0	1.68	1.44	1.44
2820.0	2850.0	4.35	3.99	3.79	2850.0	3.76	2.36	2.13	510.0	1.60	1.45	1.49
2880.0	2910.0	4.48	4.09	3.86	2910.0	3.83	2.31	2.06	530.0	1.57	1.44	1.51
2920.0	2950.0	4.52	4.13	3.91	2950.0	3.53	2.21	2.01	570.0	1.52	1.49	1.61
2980.0	3010.0	4.59	4.13	3.90	3010.0	3.70	2.19	1.94	590.0	1.53	1.56	1.70
3020.0	3050.0	4.64	4.17	3.90	3050.0	3.50	2.14	1.92	630.0	1.54	1.66	1.83
3080.0	3110.0	4.63	4.05	3.77	3110.0	3.83	2.24	1.95	650.0	1.57	1.73	1.93
3120.0	3150.0	4.75	4.12	3.84	3150.0	3.81	2.29	2.03	690.0	1.65	1.89	2.13
3180.0	3210.0	4.78	4.04	3.76	3210.0	4.25	2.47	2.14	710.0	1.70	1.97	2.23
3220.0	3250.0	5.03	4.20	3.89	3250.0	4.32	2.56	2.21	750.0	1.88	2.23	2.53
3280.0	3310.0	5.10	4.13	3.82	3310.0	4.72	2.72	2.28	770.0	1.97	2.36	2.65
3320.0	3350.0	5.61	4.37	3.99	3350.0	4.96	2.86	2.36	810.0	2.12	2.56	2.91
3380.0	3410.0	5.72	4.27	3.87	3410.0	5.27	3.04	2.44	830.0	2.25	2.73	3.08
3420.0	3450.0	6.49	4.55	4.05	3450.0	5.72	3.30	2.56	870.0	2.52	3.05	3.43
3480.0	3510.0	6.86	4.54	3.96	3510.0	5.83	3.53	2.71	890.0	2.64	3.19	3.60
3520.0	3550.0	8.51	5.06	4.23	3550.0	6.24	3.93	2.90	930.0	2.92	3.52	3.95
3580.0	3610.0	8.81	5.17	4.25	3610.0	6.39	4.31	3.18	950.0	3.05	3.67	4.09
3620.0	3650.0	10.75	5.99	4.67	3650.0	6.61	4.80	3.47	990.0	3.27	3.91	4.34
3680.0	3710.0	10.62	6.24	4.82	3710.0	6.76	5.17	3.82	1010.0	3.43	4.07	4.51

Frequency Mixer

ADE-3GL+

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(dBc)										
0	-	-	14	28	5	36	33	47	19	55	43	61
1	-	33	0	48	39	39	41	50	49	52	52	68
2	57	72	50	53	50	72	60	62	64	84	51	72
3	62	105	90	96	68	84	74	82	70	80	76	73
4	88	84	91	100	87	95	93	114	92	106	79	84
5	111	89	87	88	85	92	91	82	101	91	85	92
6	101	81	85	84	86	83	88	96	89	96	90	87
7	107	86	93	82	86	94	90	84	100	85	87	85
8	96	66	83	81	84	82	86	88	84	89	87	84
9	103	72	73	75	89	94	81	88	86	85	86	86
10	101	70	77	73	87	90	89	98	92	91	82	87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 2350 MHz; -14 dBm.

LO IN: 2380 MHz; +7 dBm

IF OUT: 30 MHz; -20.43 dBm

RF HARMONICS ORDER

	(-dBm)	(dBc)										
0	-	-	4	39	16	42	45	60	37	77	56	80
1	-	32	0	47	38	39	46	54	56	58	61	81
2	57	63	41	44	40	68	50	61	58	77	48	80
3	62	63	59	71	52	67	55	67	55	67	63	75
4	88	70	73	84	67	76	73	74	63	66	75	81
5	111	93	73	85	90	90	66	91	74	83	66	86
6	101	99	93	85	96	100	86	93	85	89	82	79
7	107	99	100	98	84	109	97	102	88	97	94	102
8	96	81	100	95	95	95	100	98	98	98	101	104
9	103	91	82	95	95	93	99	97	96	92	93	101
10	101	92	91	82	96	95	92	91	99	92	97	93
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 2350 MHz; -4 dBm.

LO IN: 2380 MHz; +7 dBm

IF OUT: 30 MHz; -10.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
ADE-3GL+
101013
Page 5 of 5

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 332-4651 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS


minicircuits.com

Frequency Mixer


ADE-3GL+

Typical Performance Curves


Conversion Loss @ IF=30MHz

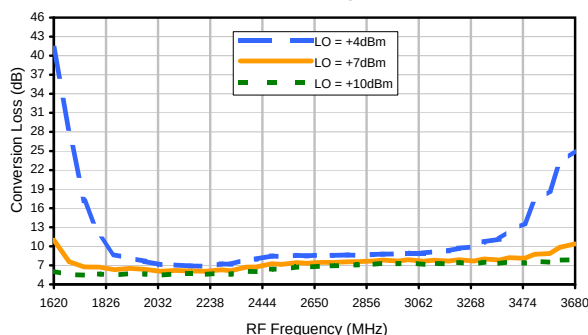


Conversion Loss vs. LO @ RF=2339.89MHz

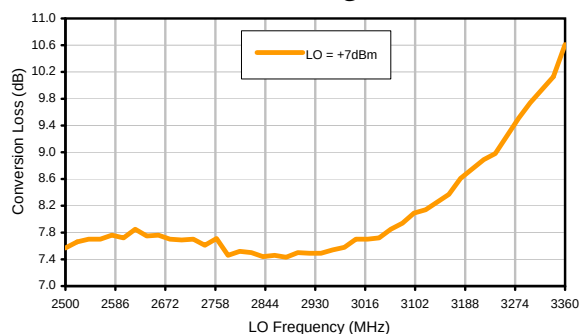


Conversion Loss vs. IF @ RF=2339.89MHz

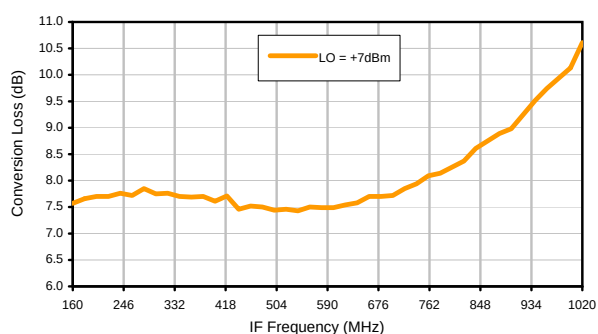


Conversion Loss vs. IF @ RF=2089.89MHz

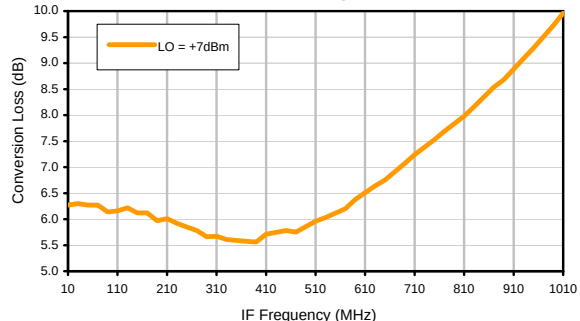


Conversion Loss vs. IF @ RF=2610.1MHz

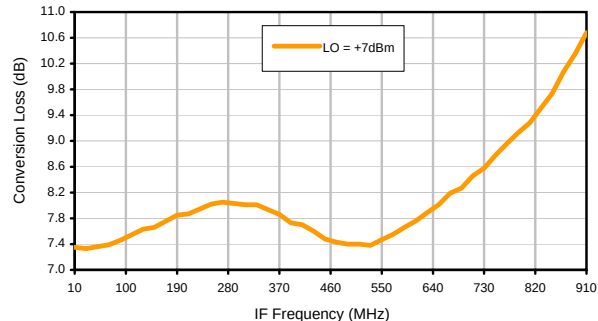

IP3 Input

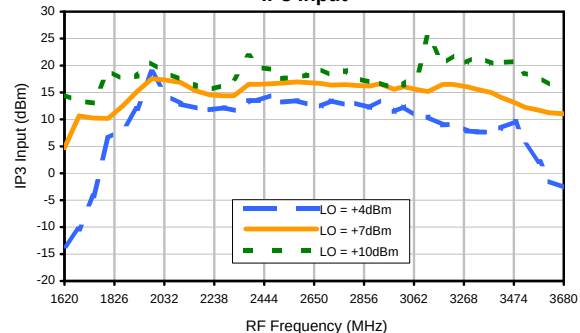

Compression @ RF IN=+1dBm

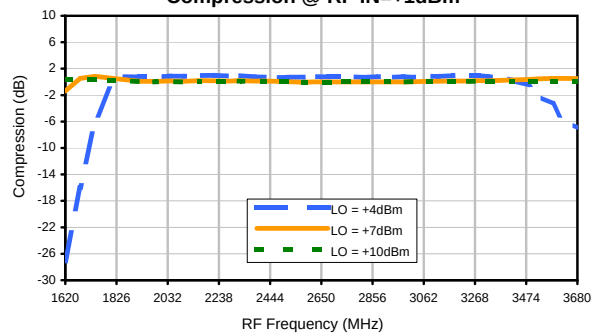


Frequency Mixer


ADE-3GL+

Typical Performance Curves


LO-RF Isolation

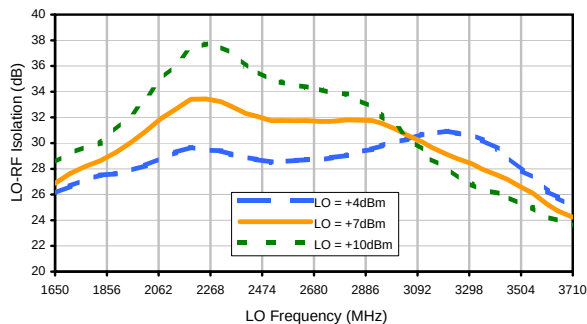


LO-IF Isolation

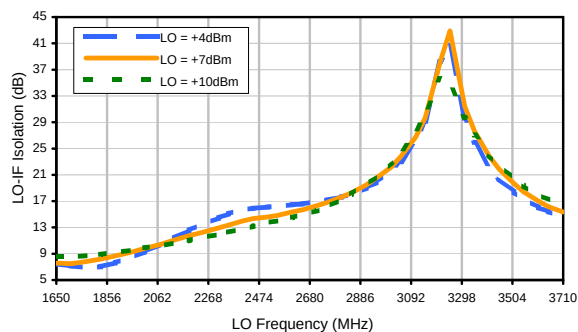


RF-IF Isolation

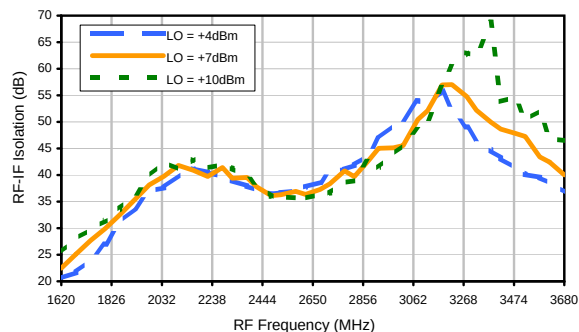


RF VSWR

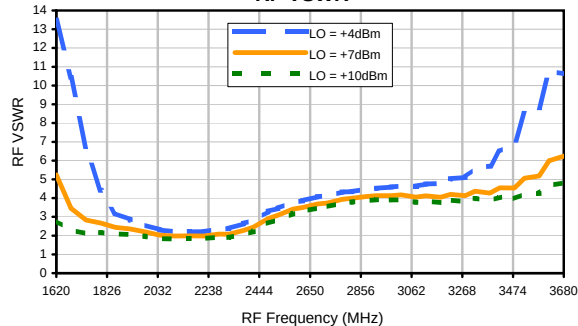

LO VSWR

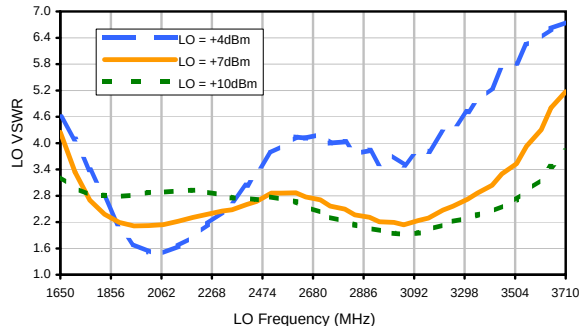

IF VSWR

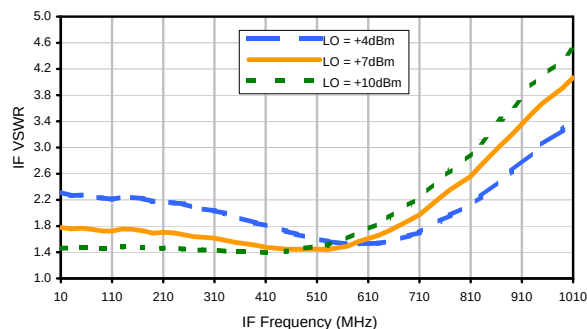

Frequency Mixer

ADE-3GL+

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	28	5	36	33	47	19	55	43	61
1	-	33	0	48	39	39	41	50	49	52	52	68
2	57	72	50	53	50	72	60	62	64	84	51	72
3	62	105	90	96	68	84	74	82	70	80	76	73
4	88	84	91	100	87	95	93	114	92	106	79	84
5	111	89	87	88	85	92	91	82	101	91	85	92
6	101	81	85	84	86	83	88	96	89	96	90	87
7	107	86	93	82	86	94	90	84	100	85	87	85
8	96	66	83	81	84	82	86	88	84	89	87	84
9	103	72	73	75	89	94	81	88	86	85	86	86
10	101	70	77	73	87	90	89	98	92	91	82	87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 2350 MHz; -14 dBm.

LO IN: 2380 MHz; +7 dBm

IF OUT: 30 MHz; -20.43 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	39	16	42	45	60	37	77	56	80
1	-	32	0	47	38	39	46	54	56	58	61	81
2	57	63	41	44	40	68	50	61	58	77	48	80
3	62	63	59	71	52	67	55	67	55	67	63	75
4	88	70	73	84	67	76	73	74	63	66	75	81
5	111	93	73	85	90	90	66	91	74	83	66	86
6	101	99	93	85	96	100	86	93	85	89	82	79
7	107	99	100	98	84	109	97	102	88	97	94	102
8	96	81	100	95	95	95	100	98	98	98	101	104
9	103	91	82	95	95	93	99	97	96	92	93	101
10	101	92	91	82	96	95	92	91	99	92	97	93
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 2350 MHz; -4 dBm.

LO IN: 2380 MHz; +7 dBm

IF OUT: 30 MHz; -10.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
ADE-3GL+
101013
Page 3 of 3

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 332-4651 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com





minicircuits.com


IF/RF MICROWAVE COMPONENTS

CD541
CD542
CD636
CD637

Outline Dimensions

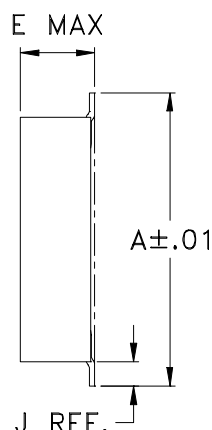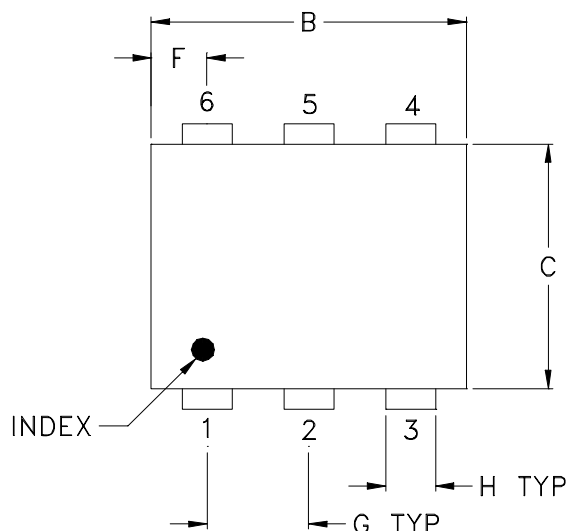

PCB Land Pattern

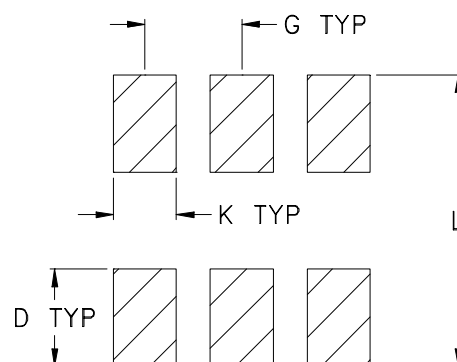

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

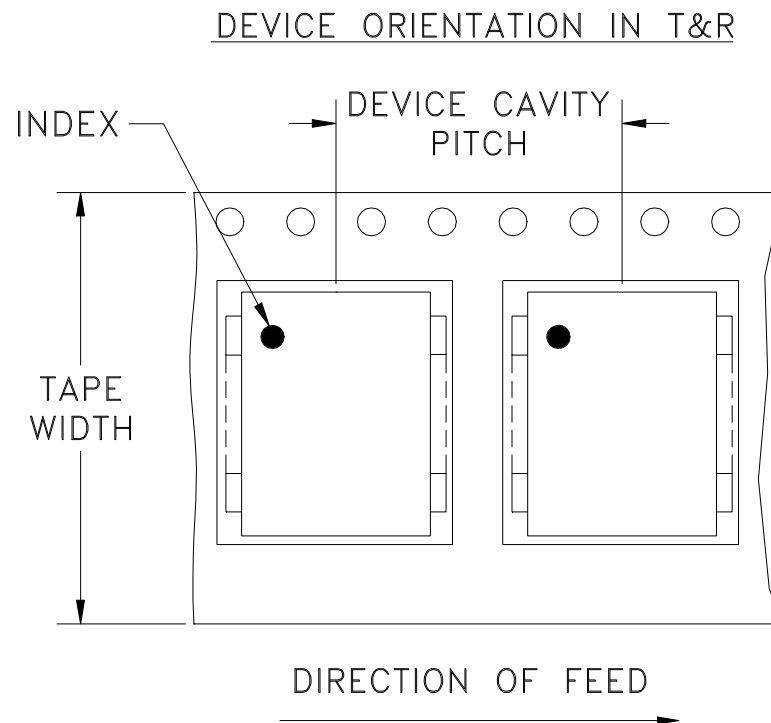

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS


REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ
A	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL

SUGGESTED MOUNTING CONFIGURATION
FOR CD541/542/636/637 CASE STYLES,
"jv", "ju", "jw" PIN CONNECTIONS

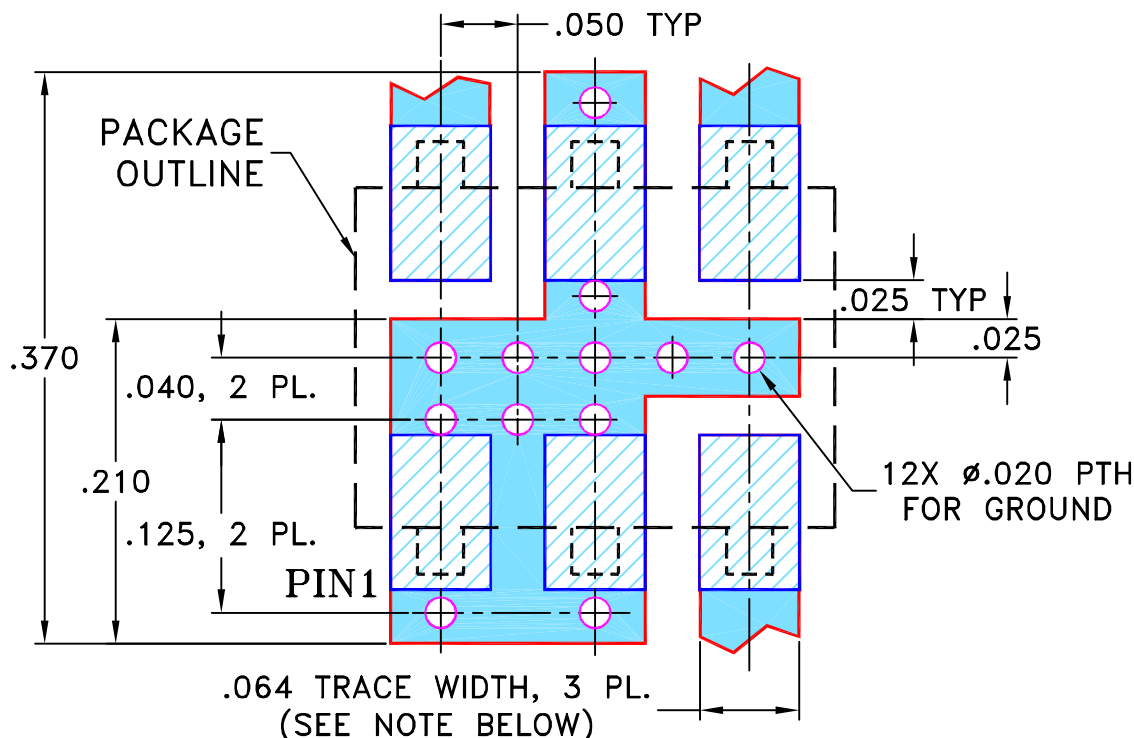

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$ 

INITIALS

DATE

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, jv/ju/jw, CD541/542/636/637, ADE, TB-02

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-051

REV:

A

FILE:

98PL051

SCALE:

8:1

SHEET:

1 OF 1



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit


For Pin Connections refer to Data Sheet of the DUT

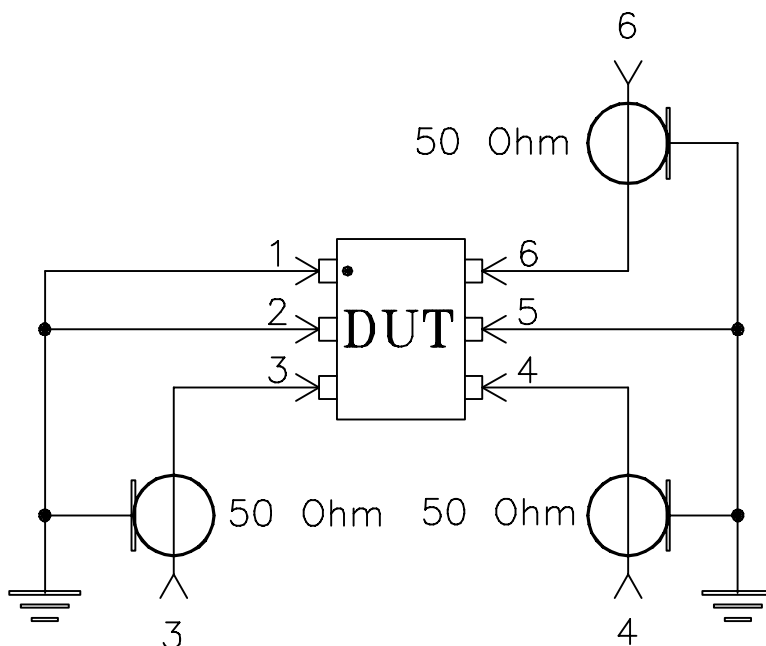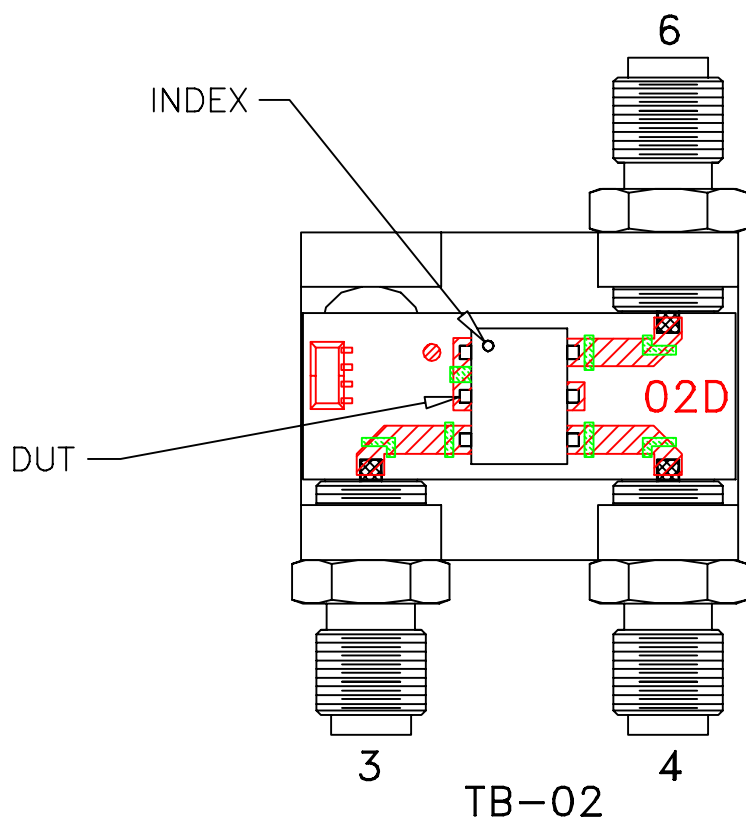

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215