

**THE BIG DEAL**

- Wideband Frequency Coverage, DC to 18 GHz
- Low Insertion Loss, 0.46 dB Typ. at 18 GHz
- Excellent Return Loss, 18 dB Typ. at 18 GHz
- Hand Formable to Almost Any Custom Shape Without Special Bending Tools
- 8 mm Bend Radius for Tight Installations
- Anti-Torque Nut Prevents Cable Stress During Installation
- Insulated Outer Jacket Standard
- Ideal for Interconnect of Assembled Systems

*Generic photo used for illustration purposes only*

Model No.	141-7SMR+
Case Style	KQ1632-7
Connectors	Right-Angle SMA Male

APPLICATIONS

- Replacement for Custom Bent 0.141" Semi-Rigid Cables
- Communication Receivers and Transmitters
- Military and Aerospace System
- Environmental and Test Chambers

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' 141 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless steel coupling nut over a gold-plated stainless steel connector body and gold-plated, brass center conductor.

KEY FEATURES

Features	Advantages
Hand-Formable RF Cables	The 141 Series Hand-Flex cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 8 mm bend radius, the 141 Hand-Flex Series is able to make connections in tight spaces making these cables ideal for dense system integration.
Excellent Return Loss	Supporting typical return loss of 29 dB to 6 GHz and 18 dB to 18 GHz, the 141 Series Hand-Flex cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: <ul style="list-style-type: none"> • 546 W at 0.5 GHz • 90 W at 18 GHz 	Mini-Circuits' 141 Series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: Power rating is at sea-level altitudes.
Built-In Anti-Torque Nut	Mini-Circuits' 141 Series Hand-Flex cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface.
Jacketed	Standard 141 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation.
Right-Angle SMA Connectors	Avoids multiple right-angle bends and improves reliability.



Coaxial Cable

141-7SMR+

50Ω 7 inch DC to 18 GHz Right-Angle SMA Male

ELECTRICAL SPECIFICATIONS AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Length ¹		7			inches
Insertion Loss	DC-2	-	0.12	0.35	dB
	2-6	-	0.22	0.62	
	6-10	-	0.29	0.82	
	10-18	-	0.46	1.13	
Return Loss	DC-2	20	31	-	dB
	2-6	20	29	-	
	6-10	16	25	-	
	10-18	16	18	-	

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS²

Parameter	Ratings
Operating Temperature	-55 °C to +105 °C
Storage Temperature	-55 °C to +105 °C
Power Handling at +25 °C, Sea Level	546 W at 0.5 GHz 387 W at 1 GHz 273 W at 2 GHz 156 W at 6 GHz 121 W at 10 GHz 90 W at 18 GHz

2. Permanent damage may occur if any of these limits are exceeded.



HAND FLEX™


Coaxial Cable

141-7SMR+

Mini-Circuits


50Ω 7 inch DC to 18 GHz Right-Angle SMA Male

CABLE CONSTRUCTION

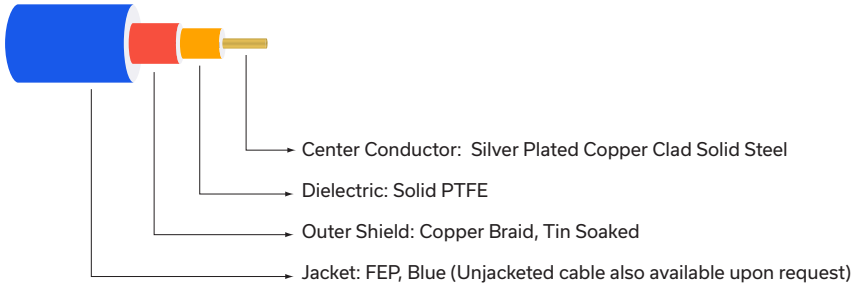

Connectors: Coupling Nut: Stainless Steel Passivated
 Body: Stainless Steel Gold Plated
 Center Pin: Silver Plated Copper Clad Steel

OUTLINE DRAWING

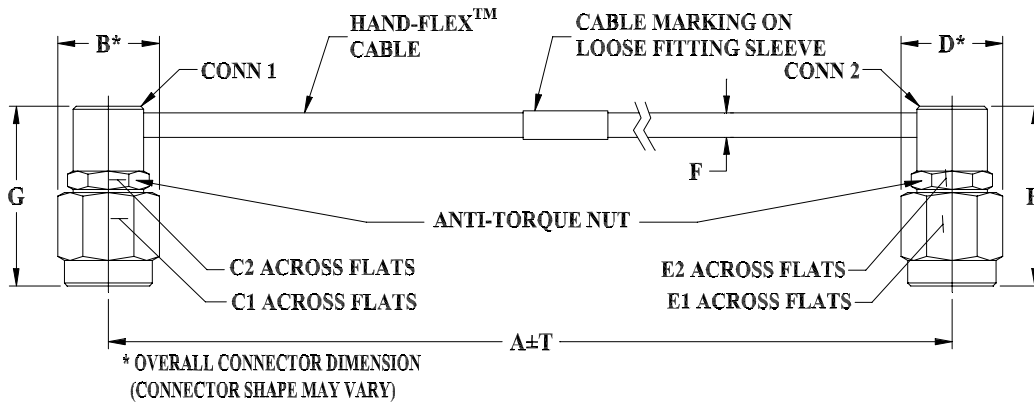

OUTLINE DIMENSIONS (Inch/mm)

A	B	C1	C2	D	E1	E2	F	G, H	T	wt
7.0	.36	.313	.250	.36	.313	.250	.163±.004	.728±.02	.10	grams
177.80	9.14	7.95	6.35	9.14	7.95	6.35	4.14±0.10	18.5±0.5	2.54	13.8





HAND FLEX™

Coaxial Cable

141-7SMR+


Mini-Circuits

50Ω 7 inch DC to 18 GHz Right-Angle SMA Male


TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		Right-Angle SMA Male	Right-Angle SMA Male
100	0.02	45.9	45.2
1000	0.07	42.1	42.7
1800	0.10	35.3	34.8
2404	0.13	34.1	33.9
4001	0.17	46.7	45.8
5000	0.19	35.3	37.8
6000	0.21	30.1	31.0
7001	0.23	29.9	29.7
8001	0.25	31.0	29.4
9000	0.26	34.8	35.3
10000	0.28	31.6	31.8
12001	0.30	33.8	32.4
14001	0.32	28.5	28.7
17069	0.38	23.1	23.5
18000	0.35	26.1	41.9

141-7SMR+
INSERTION LOSS

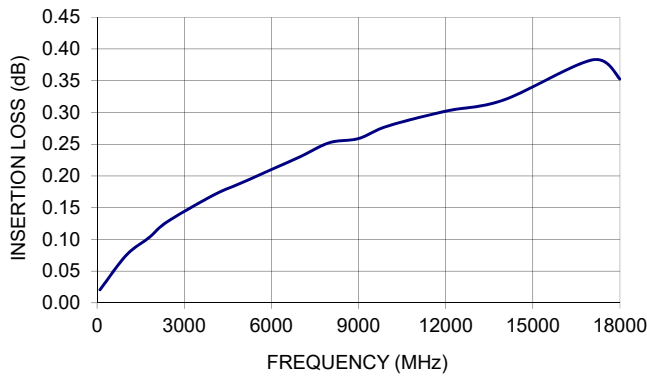

141-7SMR+
RETURN LOSS

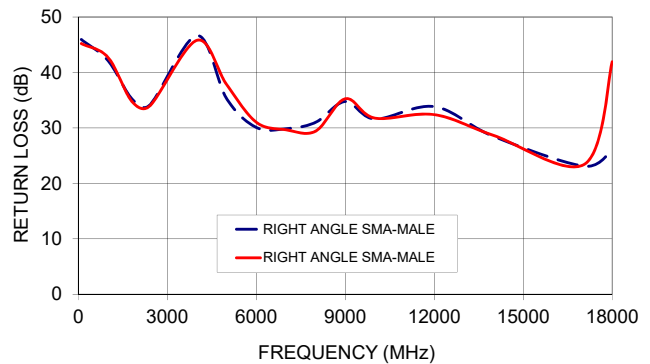

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Hand-Flex Coaxial Cable

141-7SMR+

Right Angle SMA-Male to Right Angle SMA-Male

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RIGHT ANGLE SMA-MALE 1 RETURN LOSS (dB)	RIGHT ANGLE SMA-MALE 2 RETURN LOSS (dB)
100.0	0.02	45.9	45.2
200.0	0.03	39.8	39.9
300.0	0.04	38.5	39.2
400.0	0.05	40.4	40.2
500.0	0.05	49.2	49.2
600.0	0.06	45.2	46.4
700.0	0.07	37.2	37.8
800.0	0.07	34.9	35.2
900.0	0.07	36.1	36.2
1000.0	0.07	42.1	42.7
1200.0	0.09	37.5	37.6
1400.0	0.09	33.3	33.3
1600.0	0.10	43.3	42.6
1800.0	0.10	35.3	34.8
2000.0	0.12	32.1	32.2
2500.0	0.13	31.7	31.6
3000.0	0.14	35.0	34.9
3500.0	0.16	40.6	40.4
4000.0	0.17	48.4	47.1
4500.0	0.18	44.6	45.0
5000.0	0.19	34.2	36.5
5500.0	0.20	32.4	34.8
6000.0	0.21	30.1	31.0
6500.0	0.22	29.5	30.1
7000.0	0.24	30.3	29.9
7500.0	0.24	31.6	30.5
8000.0	0.25	31.7	30.0
8500.0	0.26	35.0	33.3
9000.0	0.26	34.7	36.6
9500.0	0.27	36.3	38.4
10000.0	0.28	31.6	31.8
10500.0	0.29	28.9	28.5
11000.0	0.29	31.2	30.3
11500.0	0.30	29.8	28.4
12000.0	0.30	34.0	32.4
12500.0	0.31	30.0	29.0
13000.0	0.31	33.4	31.0
13500.0	0.32	36.9	29.3
14000.0	0.32	28.0	28.9
14500.0	0.33	28.8	25.9
15000.0	0.34	24.2	24.9
15500.0	0.36	21.4	25.9
16000.0	0.36	27.2	30.0
16500.0	0.36	28.5	29.4
17000.0	0.36	30.0	29.6
17500.0	0.34	29.7	32.4
18000.0	0.35	26.1	41.9



P.O. Box 350166, Brooklyn, New York 11235-0003 • (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR
141-7SMR+
4/29/2014
Page 1 of 1

Hand-Flex Coaxial Cable

141-7SMR+

Right Angle SMA-Male to Right Angle SMA-Male

Typical Performance Curves

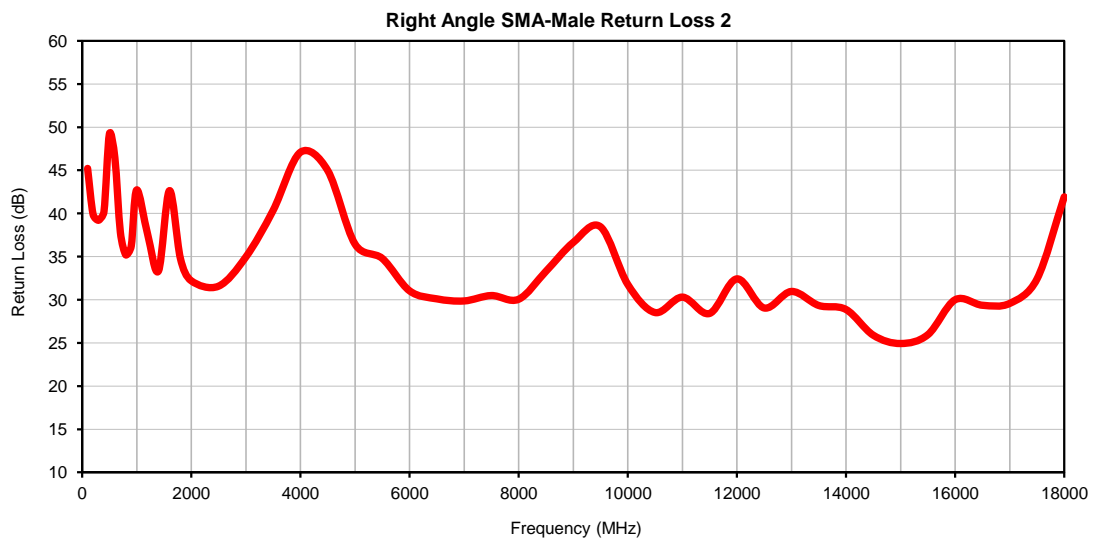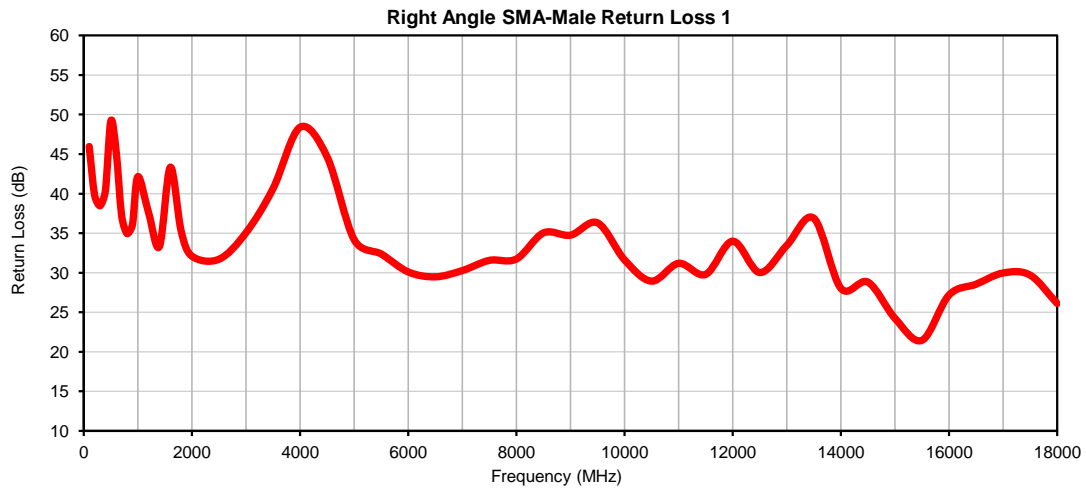

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
141-7SMR+
4/29/2014
Page 1 of 1

Outline Dimensions

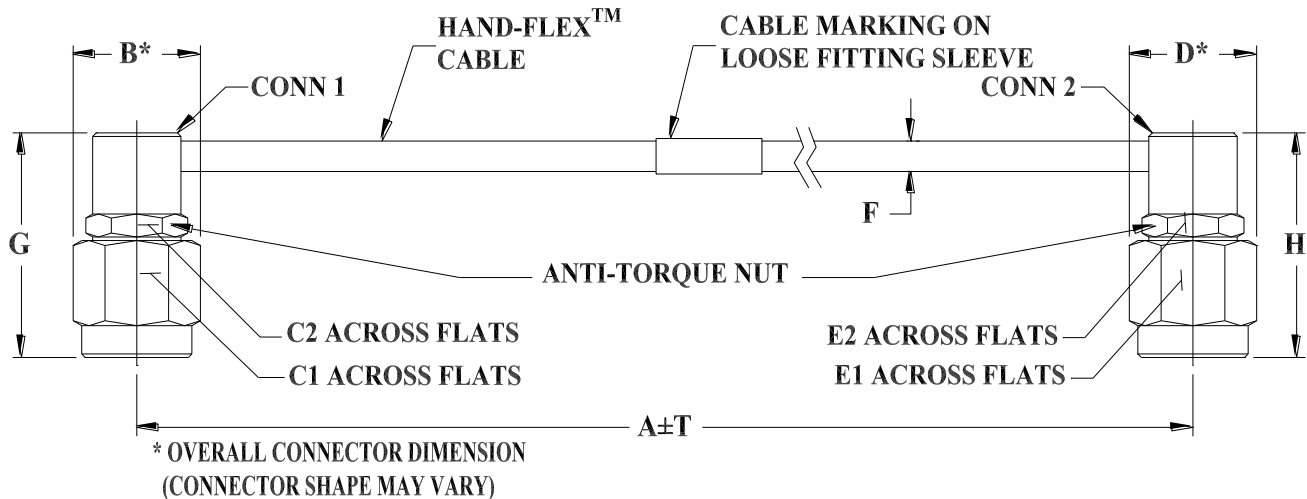

KQ1632 SERIES
 RIGHT ANGLE SMA MALE (CONN-1)
 RIGHT ANGLE SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		G	H	T		WEIGHT GRAMS
	INCH	MM							141U-ASMR+	141-ASMR+			INCH	MM	
KQ1632-2	2.00	50.80	.36 (9.14)	.313 (7.95)	.250 (6.35)	.36 (9.14)	.313 (7.95)	.250 (6.35)	.141 ∇ .003 (3.58 ∇ 0.07)	.163 ∇ .004 (4.14 ∇ 0.10)	.728 ∇ .020 (18.50 ∇ 0.50)	.728 ∇ .020 (18.50 ∇ 0.50)	.05	1.27	8.09
KQ1632-3	3.00	76.20											.05	1.27	9.23
KQ1632-4	4.00	101.60											.05	1.27	10.37
KQ1632-5	5.00	127.00											.05	1.27	11.52
KQ1632-6	6.00	152.40											.05	1.27	12.66
KQ1632-7	7.00	177.80											.10	2.54	13.80
KQ1632-8	8.00	203.20											.10	2.54	14.94
KQ1632-9	9.00	228.60											.10	2.54	16.09
KQ1632-12	12.00	304.80											.10	2.54	19.52

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. \pm .03; 3Pl. \pm .015

Note:

1. 141 Hand-Flex™ Coaxial Cable.
2. "A" represents length of cable.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	