

Ceramic


# Bandpass Filter

**BFCN-3491+**

50Ω      2790 to 4370 MHz

## The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (2790-3470 MHz)
- High rejection in upper stopband



CASE STYLE: FV1206-7

## Product Overview

The BFCN-3491+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 2790 to 4370 MHz, these units offer excellent rejection over a deep stopband.

## Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection peaks close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Deep stopband	Upper stopband features transmission zeroes for high rejection.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

# Ceramic Bandpass Filter

50Ω 2790 to 4370 MHz


## BFCN-3491+

### Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

### Applications

- Harmonic Rejection
- Transmitters / Receivers



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7


**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input	1W max.


Permanent damage may occur if any of these limits are exceeded.

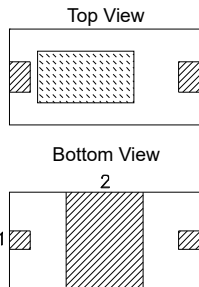

### Pad Connections

Input	1
Output	3
Ground	2

### Functional Schematic

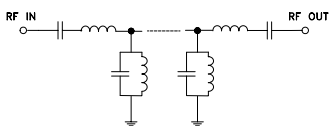

### Electrical Specifications<sup>1,2</sup> at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	3489	—	MHz
	Insertion Loss	F1-F2	2790-4370	1.5	3.0	dB
	Return Loss	F1-F2	2790-4370	12	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	DC-2150	18	21	dB
Stop Band, Upper	Insertion Loss	F4-F5	5950-7200	20	30	dB
		F5-F6	7200-10000	15	20	dB





1. Measured on Mini-Circuits Characterization Test Board TB-812+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
600	-42.91	-0.11
1200	-26.66	-0.24
2200	-28.41	-0.73
2600	-2.25	-15.09
3000	-0.97	-17.51
3600	-0.86	-17.76
4400	-1.17	-17.03
4500	-1.37	-14.16
4750	-2.98	-6.20
5250	-14.02	-0.85
6000	-32.75	-0.42
7000	-45.26	-0.40
8000	-25.20	-0.42
9000	-28.29	-0.37
10000	-29.03	-0.33


### Specification Definition

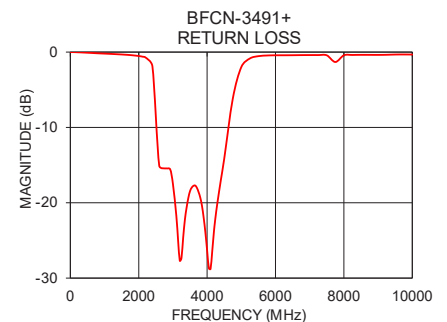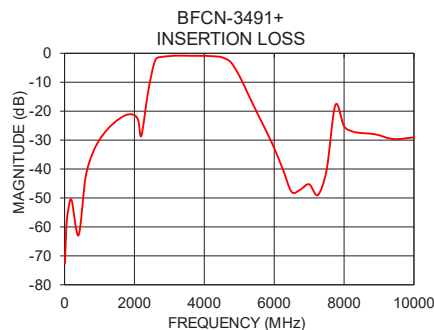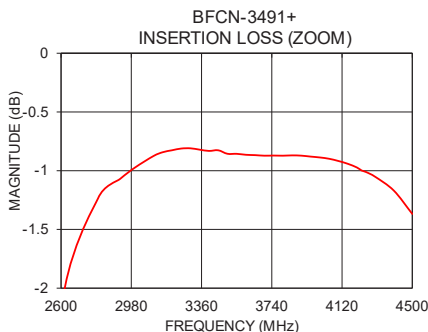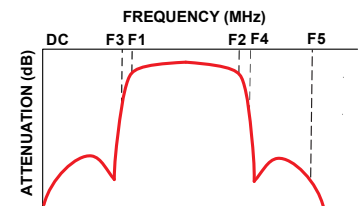


# Bandpass Filter

# BFCN-3491+


## Outline Drawing

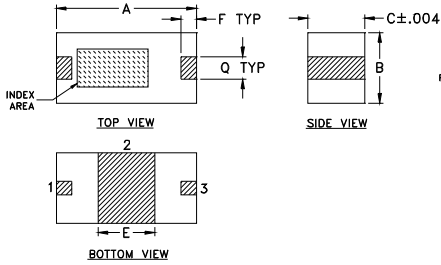

## PCB Land Pattern



## Demo Board MCL P/N: TB- 812+ Suggested PCB Layout (PL-439)

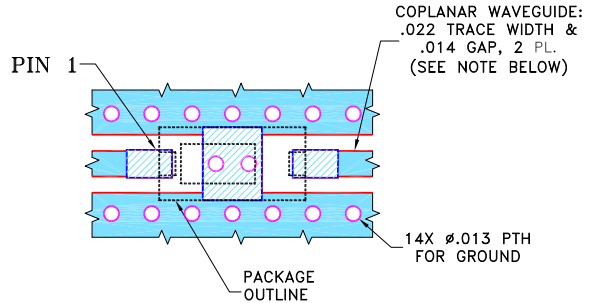

### NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS  $.010" \pm .001"$ , COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Product Marking: N/A

## Pad Connections

Input	1
Output	3
Ground	2

## Outline Dimensions (inch/mm)

A	B	C	E	F	G	H
.126	.063	.051	.051	.014	.183	.104
3.20	1.60	1.30	1.30	0.36	4.65	2.64
J	M	N	P	Q	R	wt
.051	.063	.014	.024	.020	.039	grams
1.30	1.60	0.36	0.61	0.51	0.99	.020

## Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Ceramic Bandpass Filter

# BFCN-3491+

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
10	72.66	0.01
55	59.23	0.00
100	54.52	0.01
200	50.70	0.02
400	62.91	0.06
600	42.91	0.11
800	34.63	0.16
1000	29.91	0.20
1200	26.66	0.24
1400	24.23	0.29
1600	22.38	0.34
1800	21.18	0.42
2000	21.37	0.52
2113	23.37	0.61
2200	28.41	0.73
2400	12.70	1.89
2600	2.25	15.09
2800	1.24	15.43
2920	1.07	15.57
3000	0.97	17.51
3100	0.88	21.75
3150	0.84	24.93
3200	0.83	27.69
3250	0.81	27.33
3300	0.81	24.61
3350	0.82	22.24
3400	0.83	20.64
3450	0.83	19.37
3500	0.86	18.45
3550	0.86	17.99
3600	0.86	17.76
3650	0.87	17.71
3700	0.87	18.01
3750	0.87	18.58
3800	0.87	19.32
3850	0.87	20.42
3900	0.87	22.03
3950	0.88	23.97
4000	0.89	26.33
4050	0.90	28.68
4100	0.92	28.78
4150	0.94	26.40
4200	0.97	23.77
4226	1.00	22.66
4250	1.01	21.74
4300	1.05	20.02
4400	1.17	17.03
4500	1.37	14.16
4750	2.98	6.20
5000	7.70	1.99
5250	14.02	0.85
5500	20.25	0.54
5750	26.34	0.45
5840	28.59	0.44
6000	32.75	0.42
6250	40.14	0.42
6500	47.91	0.41
6750	47.12	0.40
7000	45.26	0.40
7250	49.02	0.40
7500	40.35	0.43
7750	17.93	1.32
8000	25.20	0.42
8250	27.05	0.38
8500	27.56	0.37
8750	27.78	0.37
9000	28.29	0.37
9250	29.29	0.36
9500	29.68	0.32
9750	29.40	0.32
10000	29.03	0.33







P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)




IF/RF MICROWAVE COMPONENTS


## Typical Performance Curves

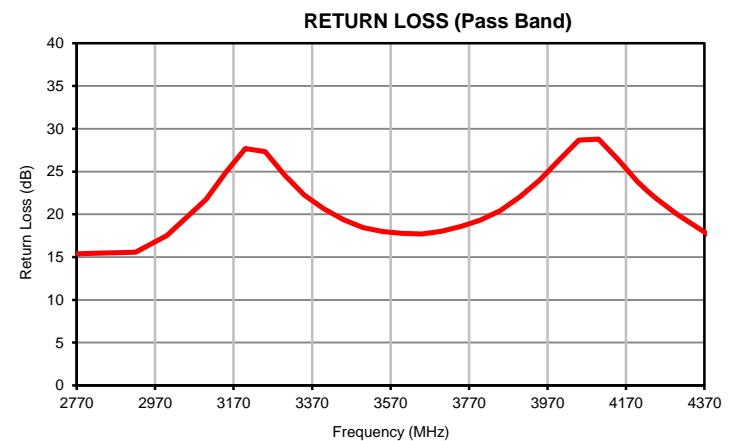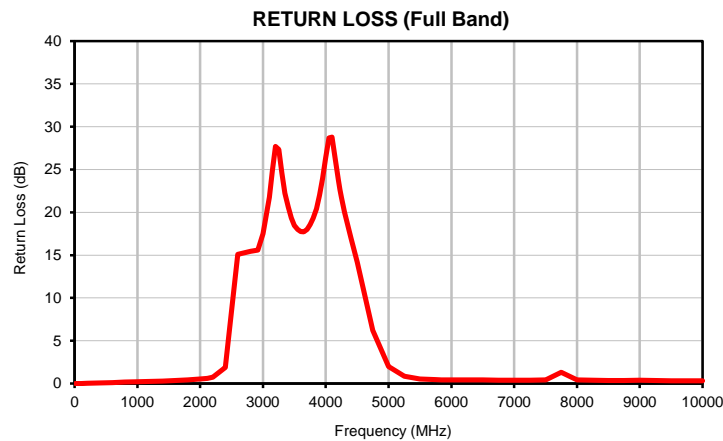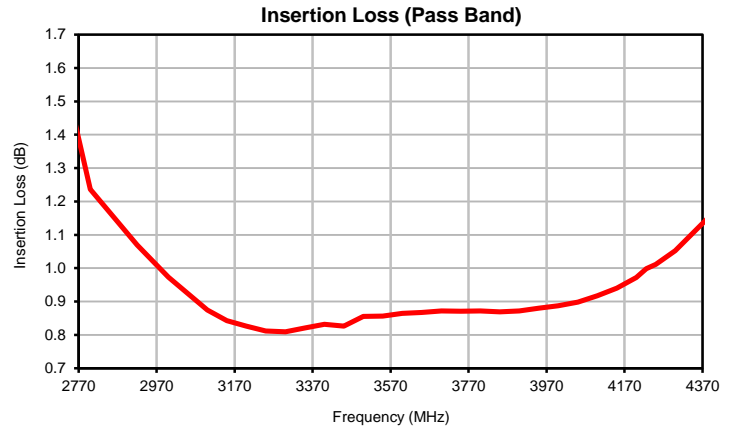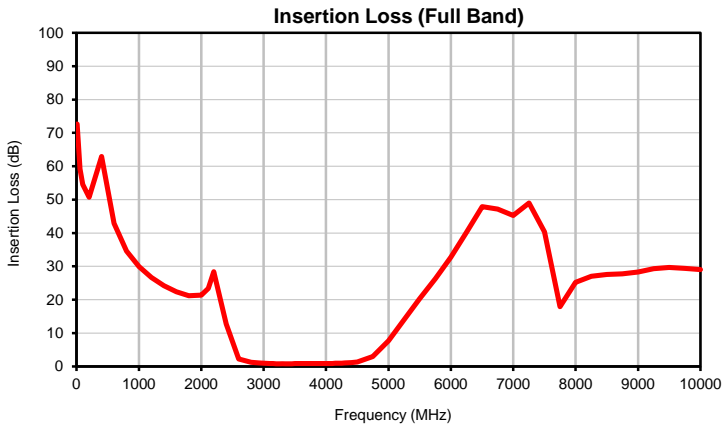

### Outline Dimensions

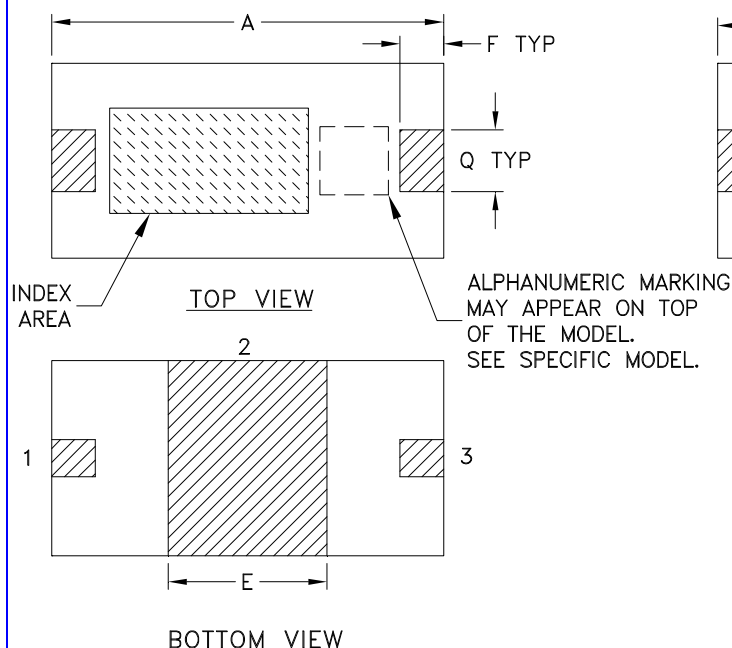

### PCB Land Pattern

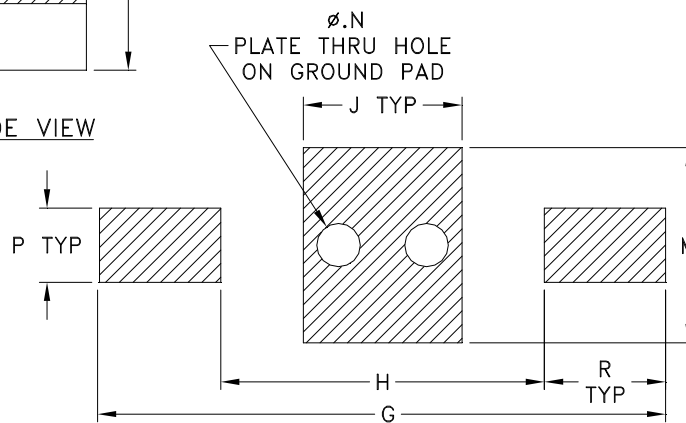

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-7	.126 (3.20)	.063 (1.60)	.051 (1.30)	-- --	.051 (1.30)	.014 (0.35)	.183 (4.65)	.104 (2.65)	.051 (1.30)	-- --	-- --	.063 (1.60)

CASE #	N	P	Q	R	S	WT. GRAM
FV1206-7	.014 (0.35)	.024 (0.60)	.020 (0.50)	.039 (1.00)	-- --	.020

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

#### Notes:

- Open style, ceramic base.
- Termination finish: **as shown below or indicated on Data Sheet.**  
 For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
 For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
- Line width should be designed to match 50 $\Omega$  characteristic impedance, depending on PCB material and thickness.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F75

## DEVICE ORIENTATION IN T&R

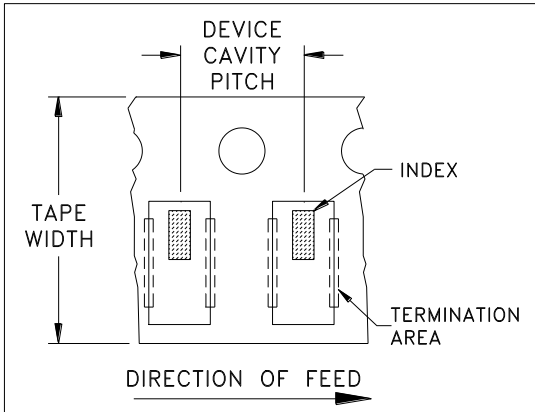


ILLUSTRATION 1

### Applicable Case Styles

FV1206-1  
FV1206-3

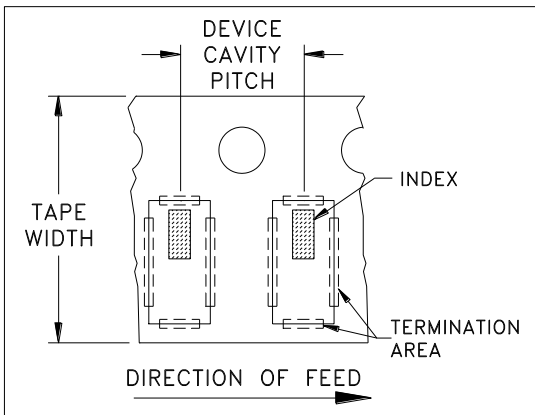


ILLUSTRATION 2

### Applicable Case Styles

FV1206-4  
FV1206-5  
FV1206-6  
FV1206-7  
FV1206-9  
JC0603C-1

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



INTERNET <http://www.minicircuits.com>  
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661  
 Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010  
 Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

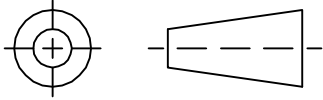


REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148536	NEW RELEASE	10/14/14	GF	MY

SUGGESTED MOUNTING CONFIGURATION  
FOR FV1206-7 CASE STYLE, "03FL02" PIN CODE

COPLANAR WAVEGUIDE:  
 .022 TRACE WIDTH &  
 .014 GAP, 2 PL.  
 (SEE NOTE BELOW)

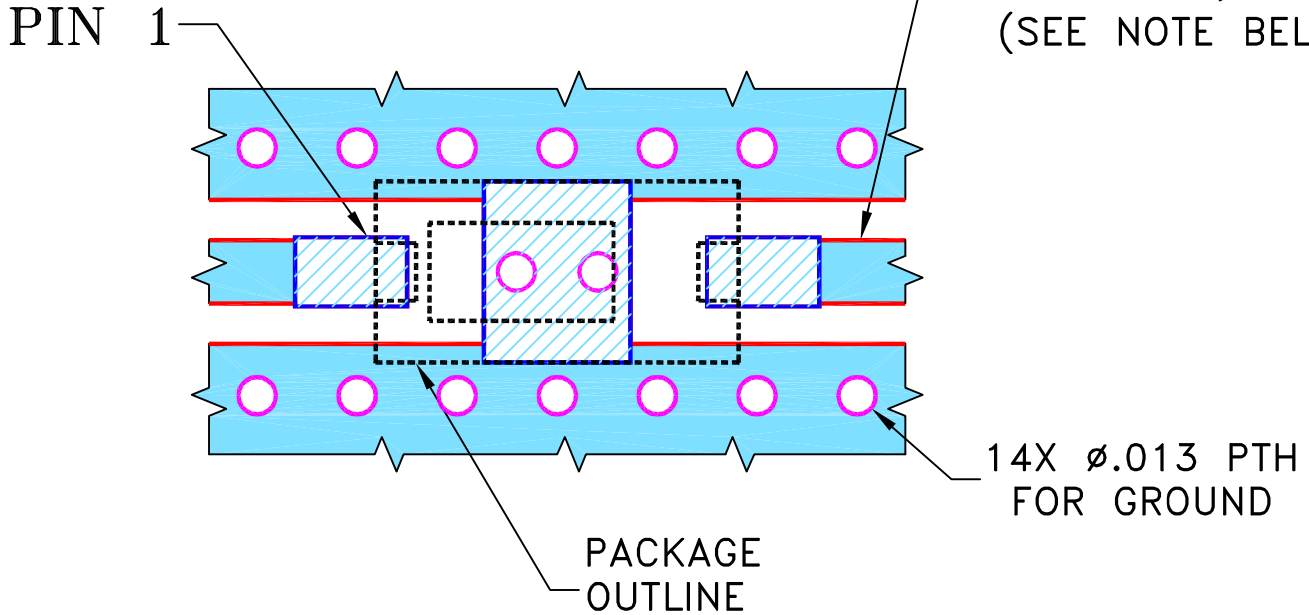

NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).


 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	DRAWN	GF	10/07/14
	CHECKED	AV	10/14/14
	APPROVED	MY	10/14/14

 **Mini-Circuits®** 13 Neptune Avenue  
 Brooklyn NY 11235


PL, 03FL02, FV1206-7, TB-812+

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-439	REV: OR
FILE: 98PL439	SCALE: 15:1	SHEET: 1 OF 1	


 Mini-Circuits®  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.



# Evaluation Board and Circuit

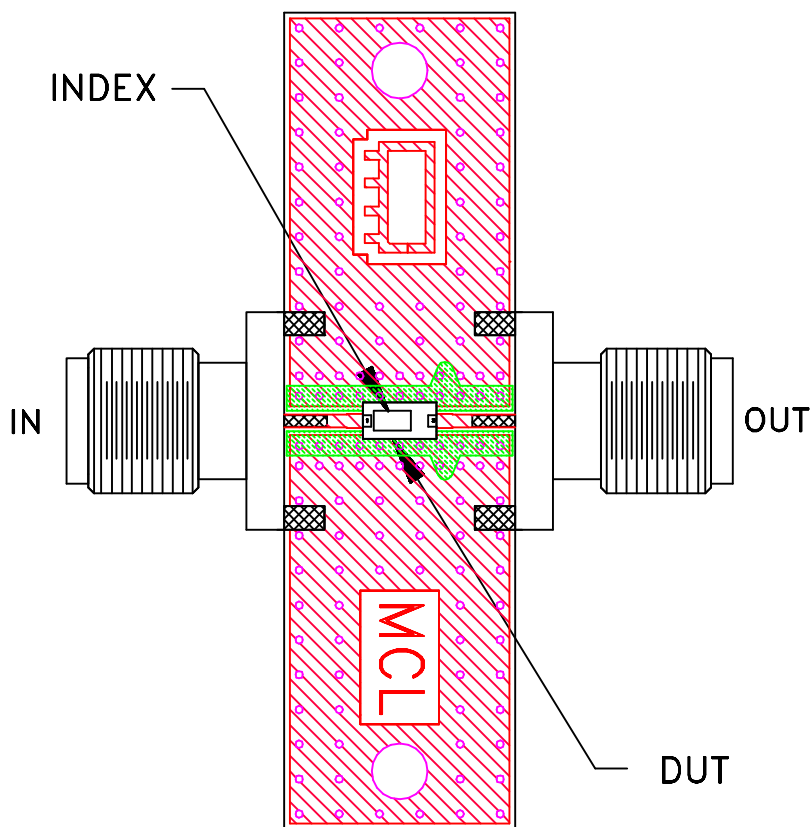


TB-812+

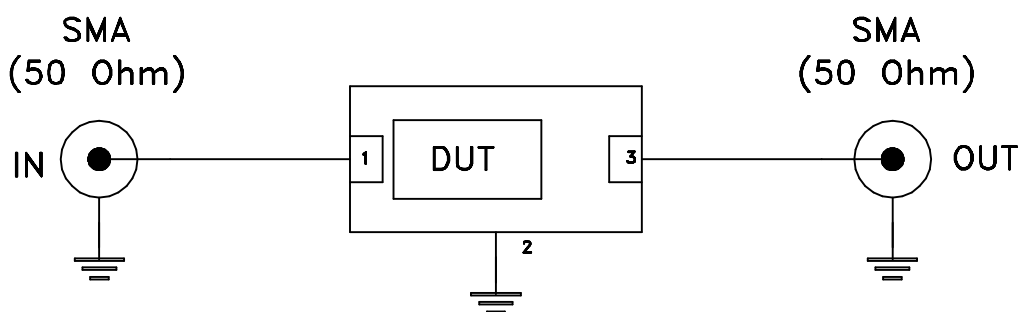

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A